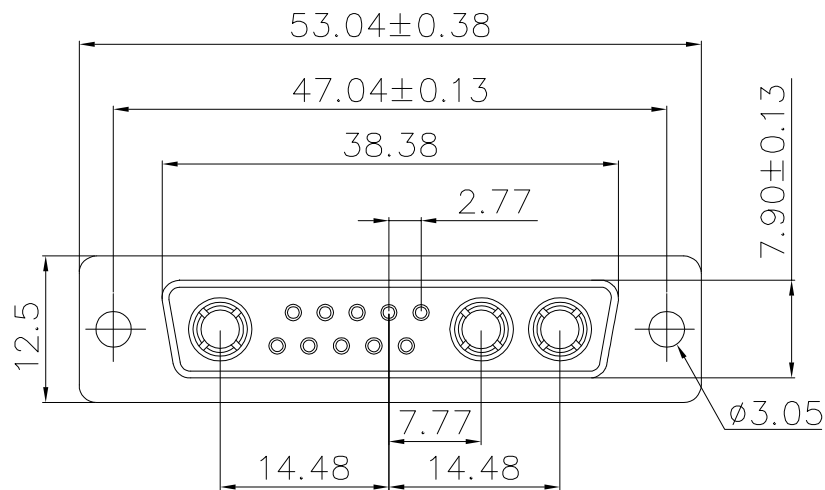


Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000M Ω Min.
Temperature range:-55℃ to +125℃
ROHS compliant
Part number:

B08-AW34X1X0-X1

Housing color:_____

1: Black

3: Green

5: White

Terminal plated: _____

4: Au 2u"

5: Au 1u"


Current rating: _____

A: 10A,Dim.A ϕ 1.7


B: 20A,Dim.A ϕ 2.8

C: 30A,Dim.A ϕ 3.2

D: 40A,Dim.A ϕ 4.6

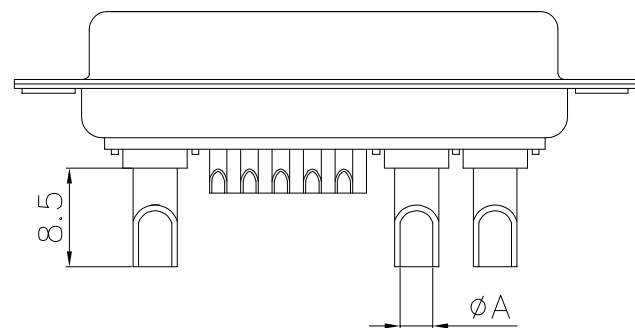

10A,20A,30A

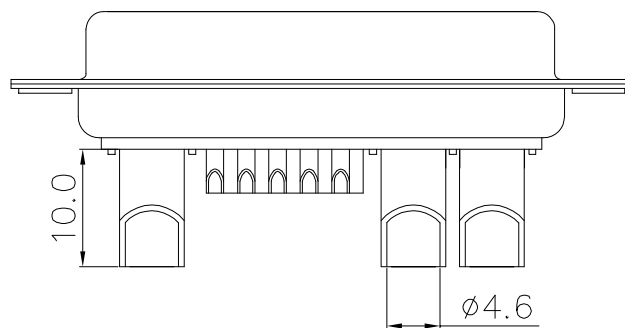

40A

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

	2023/03/27	Added 40A drawings	Jack Chen
	2023/03/16	Added terminal plating type	Jack Chen
	2012/04/22	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

: :

CRITICAL MAJOR

: :


ZERO DEFECT S.P.C

Tolerance

x. $\pm$ 0.60

.x $\pm$ 0.40



.xx $\pm$ 0.25



NAME:	13W3 female solder,cup 8.5mm				PART NO.	B08-AW34X1X0-X1		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2012/04/22	John Liao	Jack Chen		B08-004	

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

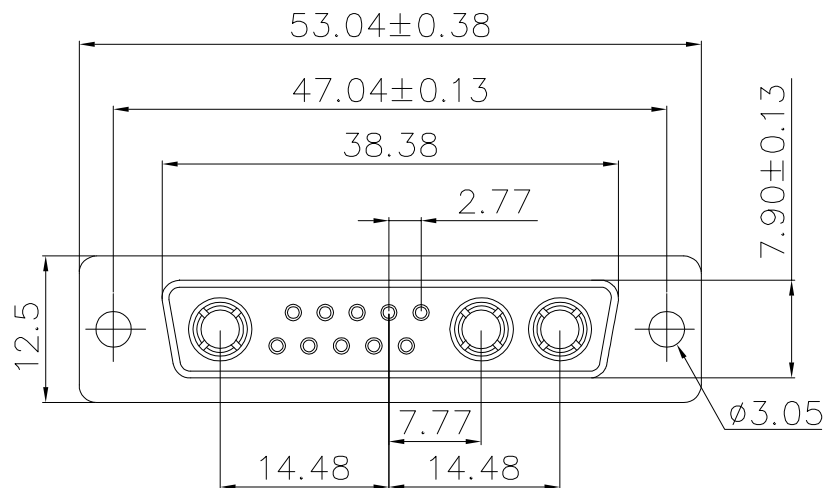

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000M Ω Min.
Temperature range:-55℃ to +125℃
ROHS compliant
Part number:

B08-AW34X1X0-X2

Housing color:_____

1: Black

3: Green

5: White

Terminal plated: _____

4: Au 2u"

5: Au 1u"


Current rating: _____

A: 10A,Dim.A ϕ 1.7


B: 20A,Dim.A ϕ 2.8

C: 30A,Dim.A ϕ 3.2

D: 40A,Dim.A ϕ 4.6

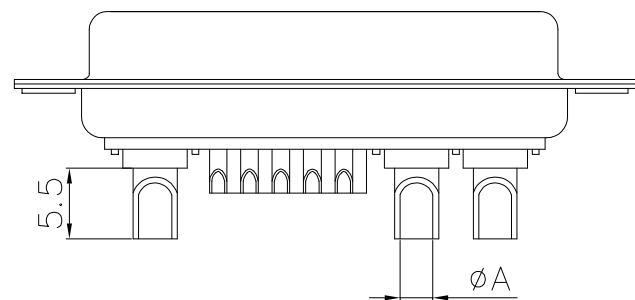

10A,20A,30A

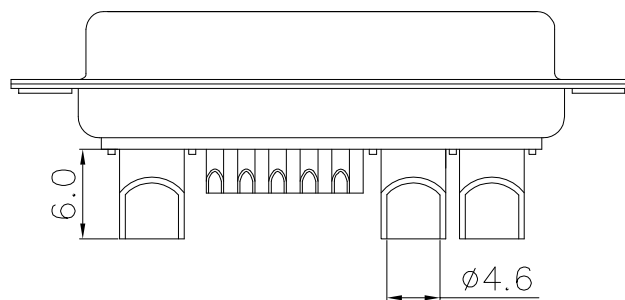

40A

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

	2023/03/27	Added 40A drawings	Jack Chen
	2022/07/02	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS

□: ☒:

CRITICAL MAJOR

▽: ▽:


ZERO DEFECT S.P.C

Tolerance

.x. $\pm$ 0.60

.x $\pm$ 0.40

.xx $\pm$ 0.25



NAME:

13W3 female solder,cup 5.5mm

PART NO.

B08-AW34X1X0-X2

REV:

B

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2022/07/02

John Liao

Jack Chen

B08-128

lineconn 东莞市林诚塑胶电子有限公司

<http://www.lineconn.com>
TEL:0769-85181660 85181770