
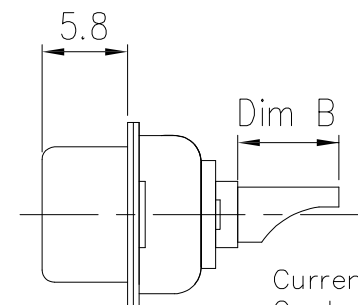


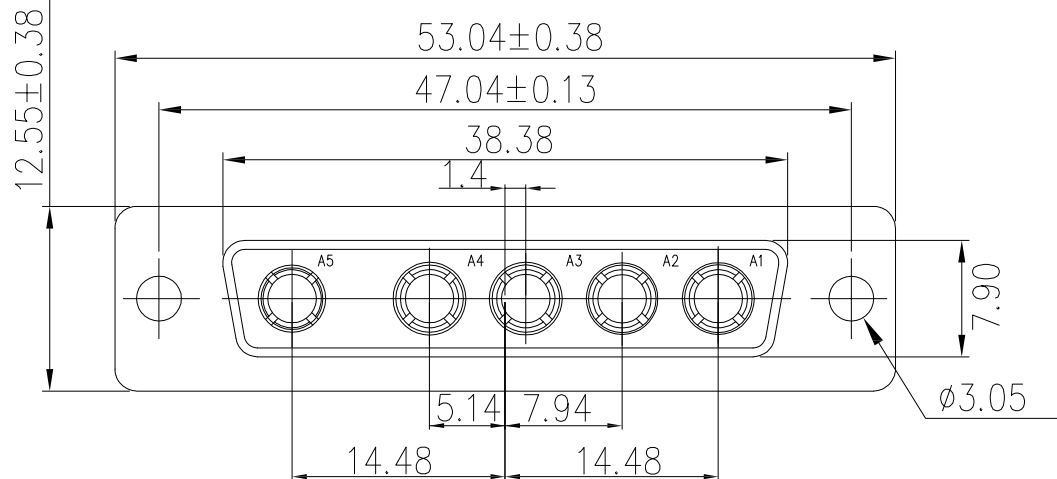

Current rating: 10/20/30/40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage: 1000V AC
Insulation resistance: 5000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant

Part No.:

B08-5W5411XN-X2

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"


Current rating:

A: 10A, Dim.A 1.70, Dim.B 5.5mm

B: 20A, Dim.A 2.80, Dim.B 5.5mm

C: 30A, Dim.A 3.30, Dim.B 5.5mm

D: 40A, Dim.A 4.60, Dim.B 6.0mm


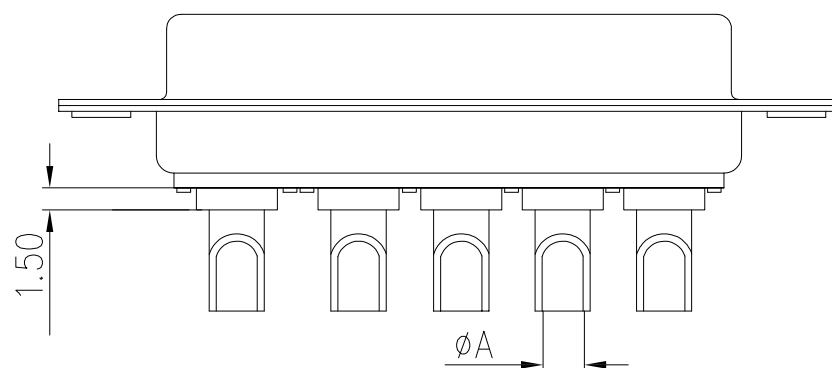


4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part no.
Item	Desc.	Material	Remarks

	2022/09/02	Add Terminal plating type	Shuo Cao	QUALITY SYMBOLS ☐ : ☒ : CRITICAL MAJOR ☐ : ☒ : ZERO DEFECT S.P.C	Tolerance	NAME:	5W5 female solder,short cup				PART NO.	B08-5W5411XN-X2			
	2022/03/24	Correction of electrical parameters Increase of the fire rating of housing	Jack Chen		x. ±0.60 .x ±0.40 .xx ±0.25	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2018/10/11	First edition release	Shuo Cao			SCALE:	N:1	DATE:	2018/10/11	Huangmei	Shuo Cao		B08-029		
SIDE	DATE	DESCRIPTION	APPROVER		 	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
8		7		6		5		4		3		2		1	

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770

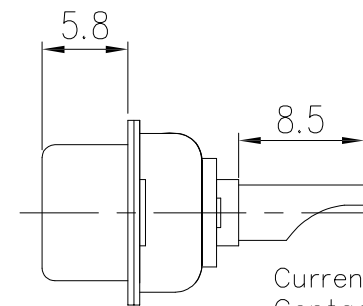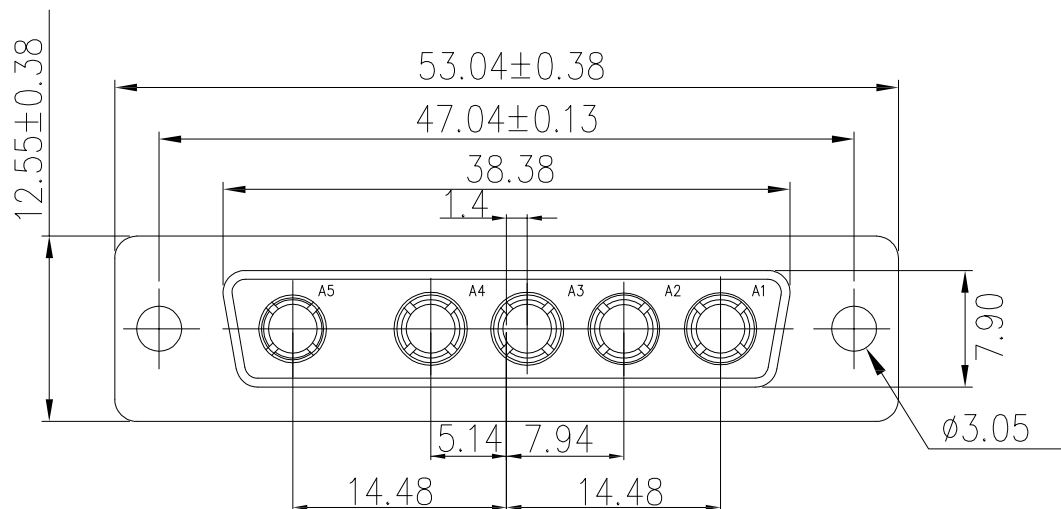

Current rating:10/20/30/40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part No.:

B08-5W5411XN-X0

Terminal plating:

4: Full Au 2u"

5: Full Au 1u"


Current rating:

A: 10A, Dim. A ø1.70

B: 20A, Dim. A ø2.80


C: 30A, Dim. A ø3.30

D: 40A, Dim. A ø4.60

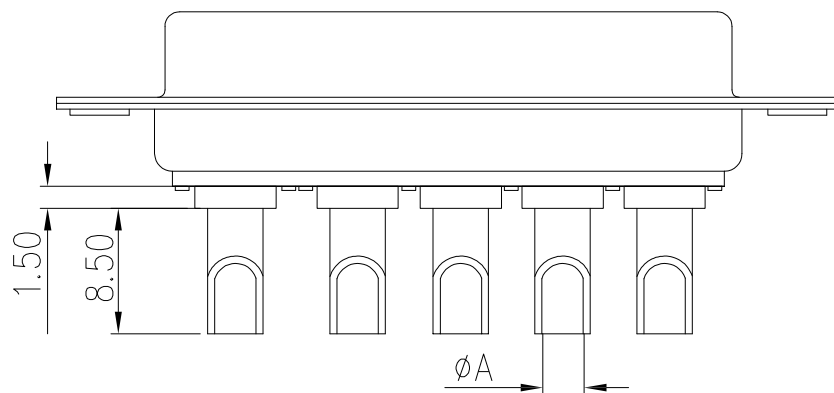

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part no.
Item	Desc.	Material	Remarks

△	2022/09/02	Add Terminal plating type	Shuo Cao	QUALITY SYMBOLS	Tolerance	NAME:	5W5 female solder, cup 8.5mm			PART NO.	B08-5W5411XN-X0		
△	2022/03/24	Correction of electrical parameters Increase of the fire rating of housing	Jack Chen	□: CRITICAL	±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
△	2013/03/16	First edition release	Jing Li	▽: ZERO DEFECT	±0.40	SCALE:	N:1	DATE:	2013/03/16	Huangmei	Shuo Cao		B08-013
				MAJOR S.P.C	±0.25								
SIDE	DATE	DESCRIPTION	APPROVER										



lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770