
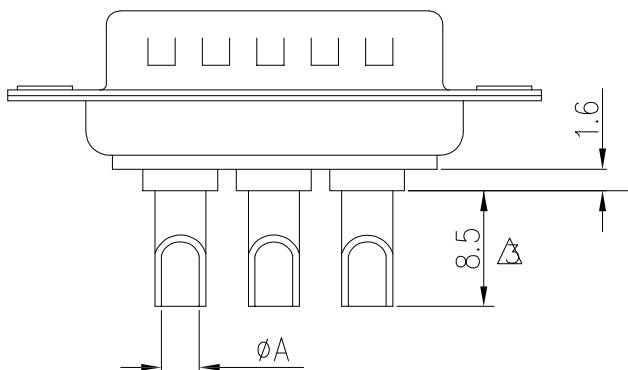
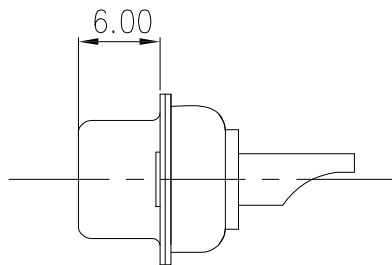


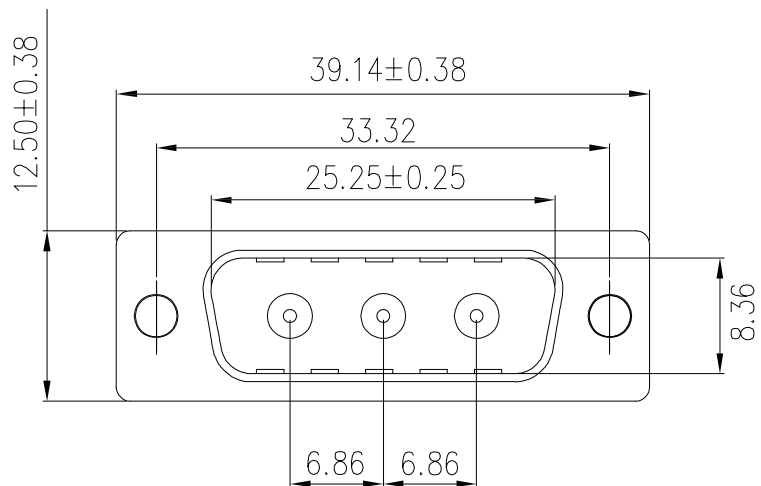

High power current rating:10,20 or 40 AMP.
High power current resistance:2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range: -55℃ to +125℃
Part No.:

B08-3W3311XN-X0

Terminal plating:
4: Full Au 2u"
5: Full Au 1u"
Current rating:
A = 10 AMPS Dim.A ø1.70
B = 20 AMPS Dim.A ø2.80
C = 30 AMPS Dim.A ø3.20
D = 40 AMPS Dim.A ø4.60

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2023/12/24	Change the dimensioning method	Jack Chen
△	2023/08/17	1,Added the terminal plating type 2,Modified operating temperature	Jack Chen
△	2013/03/11	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	3W3 male solder,cup 8.5mm				PART NO.	B08-3W3311XN-X0		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2013/03/11	Huangmei	Jack Chen		B08-005	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			