
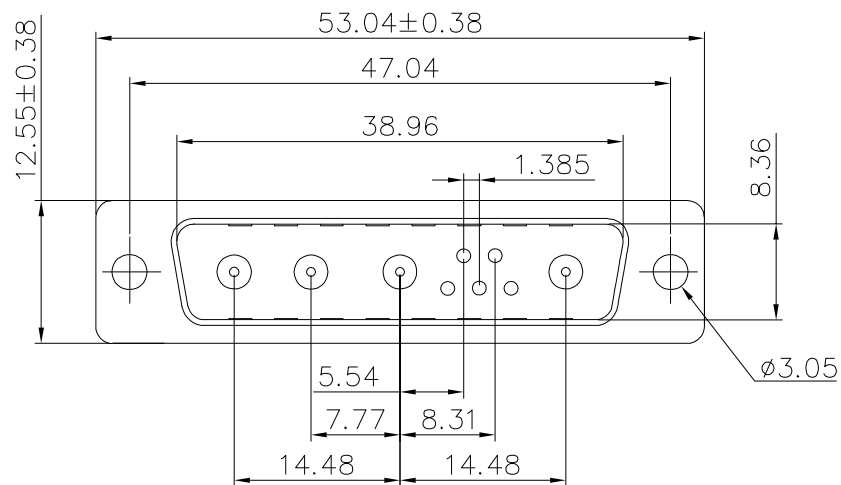


10A,20A,30A

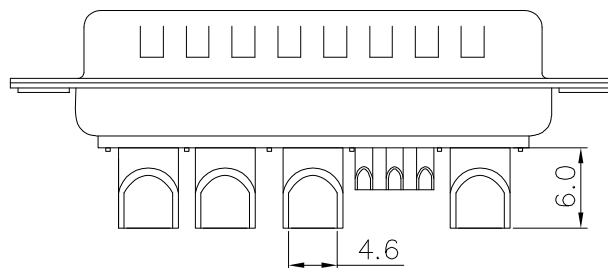

40A

Current rating:10/20/30/40 AMP.
Contact resistance:2.7 milliohms max.
Withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B08-9W43X1X0-X2

Housing color: _____
1: Black
3: Green
5: White
Terminal plated: _____
4: Au 2u"
5: Au 1u"
Current rating: _____
A: 10A, Dim.A Ø1.7
B: 20A, Dim.A Ø2.8
C: 30A, Dim.A Ø3.2
D: 40A, Dim.A Ø4.6

4	Housing	PBT+30%GF	Color: see part no.
3	Rear shell	SPCC	Plating: Sn
2	Front shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark


A

				QUALITY SYMBOLS
				□: ☒:
	2023/01/10	First edition release	Carl Hu	CRITICAL MAJOR
SIDE	DATE	DESCRIPTION	APPROVER	: : ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25


NAME:		9W4 male solder,cup 5.5mm			PART NO.		B08-9W43X1X0-X2	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2023/01/10	Yugong	Carl Hu		B08-123	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			

A



B08-9W43X1X0-X1

D:40A,Dim.A $\phi 4.6$

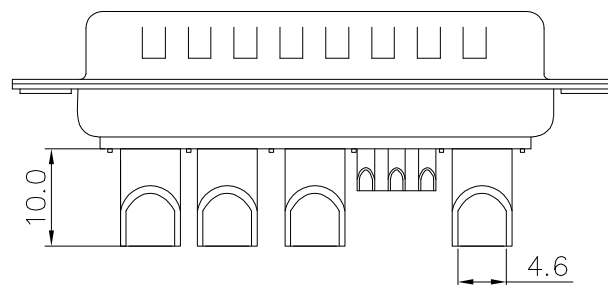

40A

Item	Desc.	Material	Remark
------	-------	----------	--------

	2022/03/24	Add terminal plating type	Carl Hu	QUALITY SYMBOLS	Tolerance		NAME:		9W4 male solder,cup 8.5mm				PART NO.		B08-9W43X1X0-X1	
	2014/09/02	Add housing color	Jing Li	 : 	CRITICAL MAJOR	x. ±0.60 .x ±0.40 .xx ±0.25	REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	2012/11/19	First edition release	Jing Li	 : 			SCALE:	N:1	DATE:	2012/11/19	Yugong	Carl Hu		B08-015		
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C			 		lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			

http://www.lineconn.com
TEL:0769-85181660 85181770