

F

E

D

C

B

A

F



E

D

C

B



A

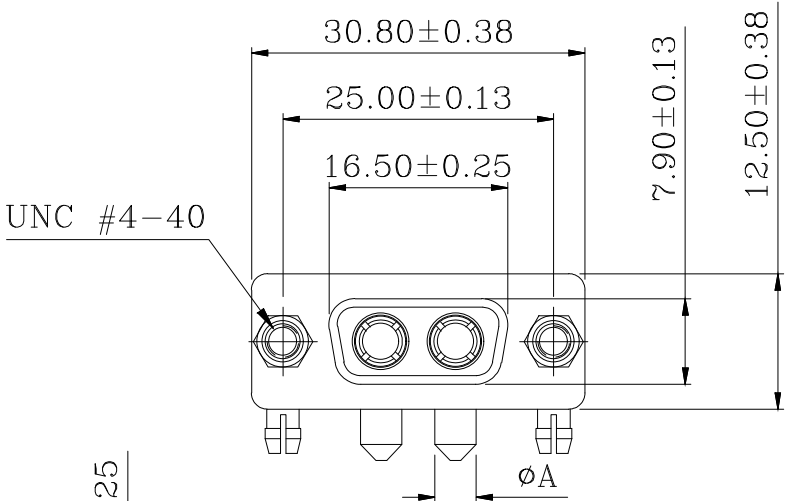

High Power Contact Current Rating:
10,20 or 40AMPS
High Power Contact Resistance:
2.7 Milliohms Max.
Dielectric Withstanding Voltage:
1000V AC For 1 Minute
Insulation Resistance:5000MΩ Min.
Temperature Range:-25℃ to +85℃

PART NO:
B08-2W26114D-X1

Current Rating: _____
A = 10 AMPS Dim.A φ1.7 Dim.B φ2.2
B = 20 AMPS Dim.A φ2.8 Dim.B φ3.3
C = 30 AMPS Dim.A φ3.2 Dim.B φ3.7
D = 40 AMPS Dim.A φ3.7 Dim.B φ4.2

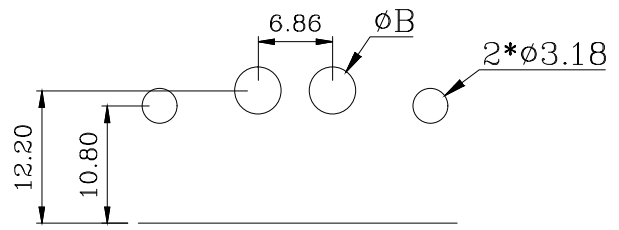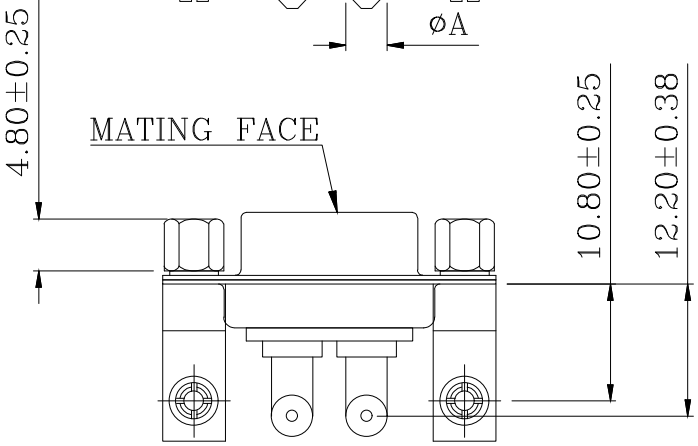

PCB LAYOUT

6	JACKSCREWS	BRASS	PLATING:Ni	
5	HOUSING	PBT+30%GF	COLOR: WHITE	
4	RIVETED INSERT	BRASS	PLATING:Ni	
3	REAR SHELL	SPCC	PLATING:Sn	
2	FRONT SHELL	SPCC	PLATING:Ni	
1	TERMINAL	BRASS	TERMINAL FINISH:FULL GOLD FINISHED 2u"	
ITEM	DESC.	MATERIAL	REMAKS	PART REMAKS

△	2012/11/19	NEW ISSUE	JINGLI
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance		NAME: 2W2 90度母头铆支架鱼叉锁螺丝 POWER D-SUB (客户用图)		PART NO. B08-2W26114D-X1	
□:	☒:	x.	±0.50	REV:	A	UNIT:	mm
CRITICAL	MAJOR	.x	±0.30	SCALE:	N:1	DATE:	2012/11/19
▽:	▽:	.xx	±0.25	JINGLI			
ZERO DEFECT	S.P.C			Lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
						TEL:0769-85181660 85181770	