
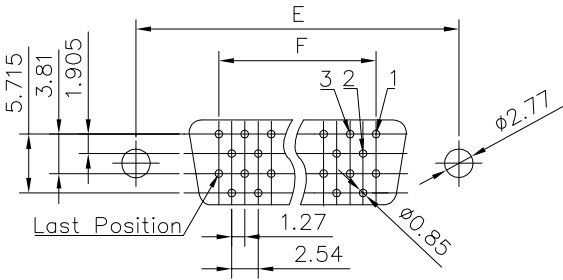


No. of Pin	Dimension					
	A	B	C	D	E	F
14	29.51	23.64	12.6	17.25	23.64	7.62
20	33.32	27.45	16.43	21.06	27.45	11.43
26	37.13	31.26	20.24	24.76	31.26	15.24
36	43.48	37.61	26.5	31.11	37.61	21.59
40	46.08	40.15	29.14	33.30	40.15	24.13
50	52.37	46.5	35.39	40.00	46.50	30.48
68	64.00	57.92	46.90	51.80	57.92	41.91
100	84.18	78.23	67.14	71.85	78.23	62.23


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant
Part No.:

B03-XXX818XB-01
No.of contact: _____
14=14pos
?
100=100POS
Contact area: _____
A: G/F
C: Au 3u"
H: Au 15u"



3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: see note Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

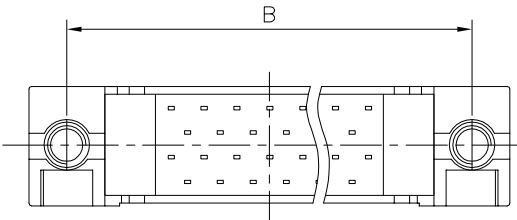

PCB Layout
(14,26,50 Pos)

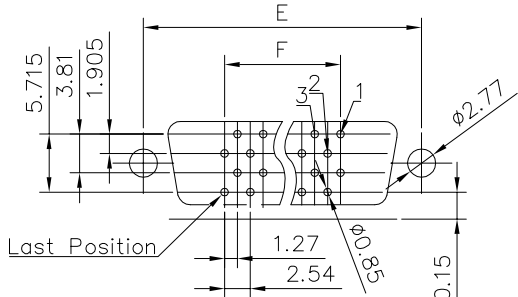

PCB Layout
(20,36,40,68,100 Pos)

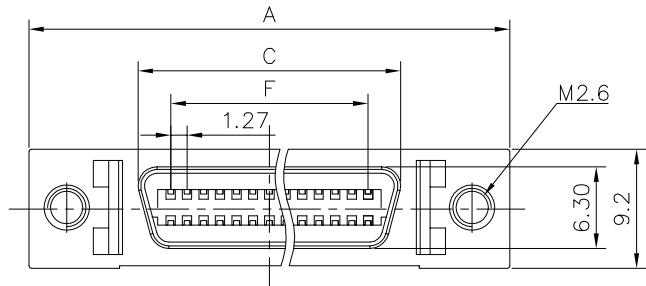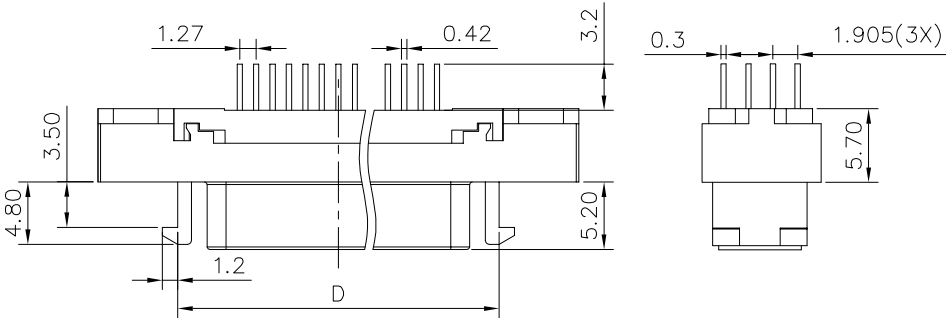

	2025/04/27	Change tolerance	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR : : ZERO DEFECT S.P.C	Tolerance		NAME:		SCSI female vertical for PCB				PART NO.		B03-XXX818XB-01	
	2025/04/21	Change terminal material description	Jack Chen		.x ±0.60 .x ±0.40 .xx ±0.25	REV:	F	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-008			
	2010/09/18	First edition release	Jing Li			SCALE:	N:1	DATE:	2010/09/18	Huangmei	Jack Chen					
SIDE	DATE	DESCRIPTION	APPROVER			lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com TEL:0769-85181660 85181770		