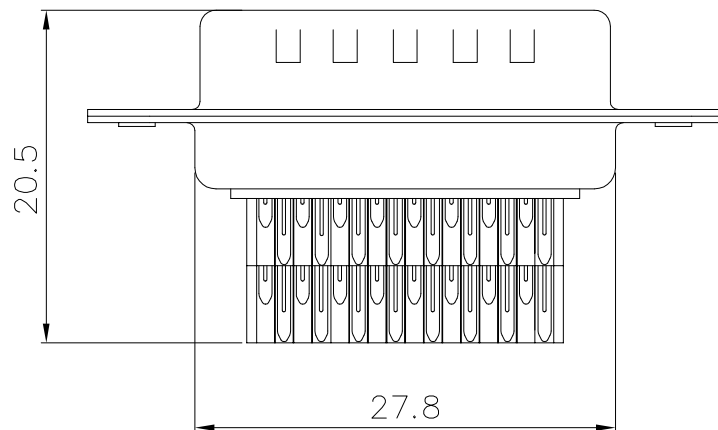
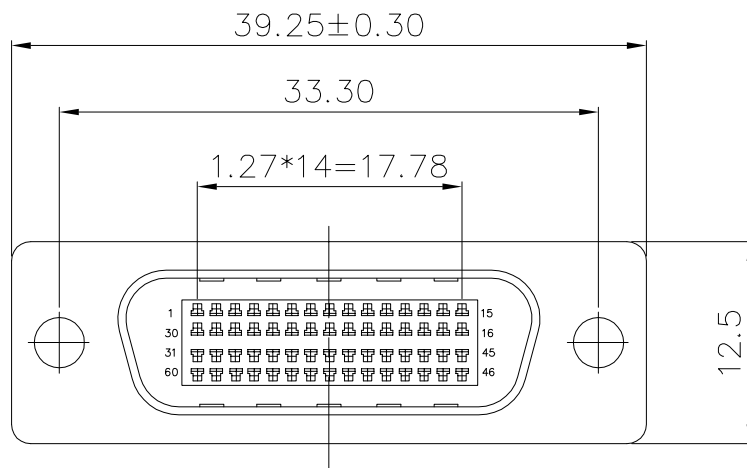


Current rating: 3A
Withstanding voltage: 500V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +125℃
ROHS compliant


6	Rear shell	SPCC	Plating: Sn
5	Front shell	SPCC	Plating: Ni
4	Cover	LCP+G.F.30%	Color: black
3	Housing	LCP+G.F.30%	Color: black
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2019/07/14	Change tolerance	Jack Chen
△	2019/07/06	Changed the part number	Jack Chen
△	2009/04/14	First edition release	Jing Li




SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:	LFH 60pin male solder connector				PART NO.	B04-060311AN-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B04-014	

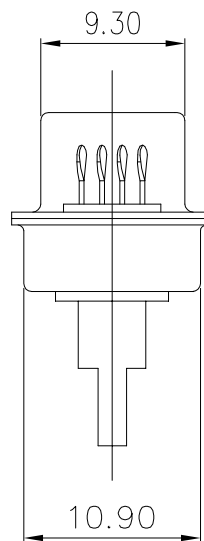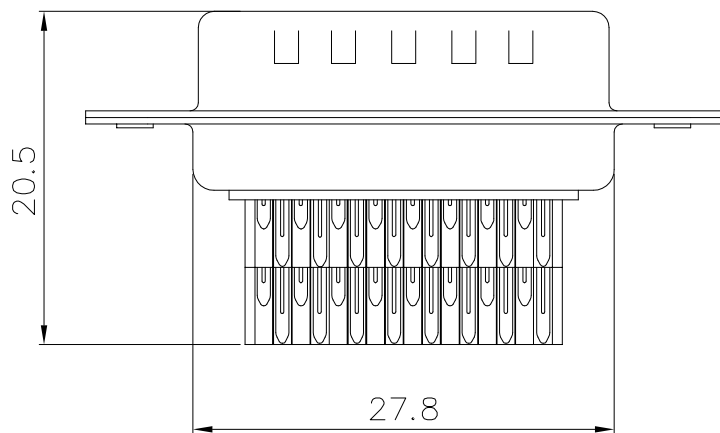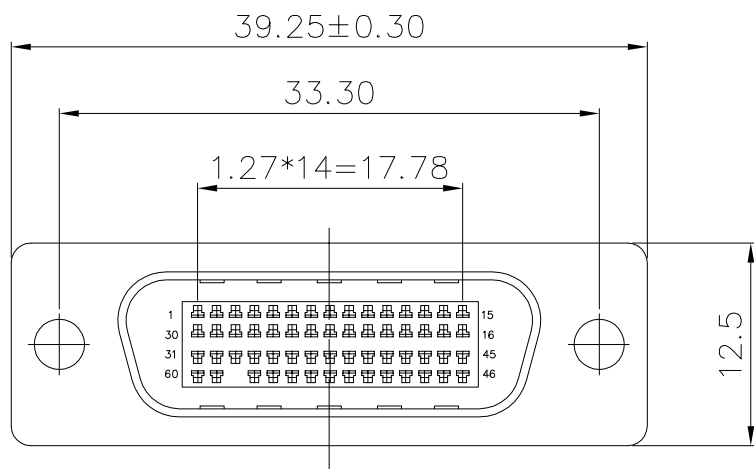

Current rating: 3A
Withstanding voltage: 500V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +125℃
ROHS compliant

6	Rear shell	SPCC	Plating: Sn
5	Front shell	SPCC	Plating: Ni
4	Cover	LCP+G.F.30%	Color: black
3	Housing	LCP+G.F.30%	Color: black
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2019/07/14	Change tolerance	Jack Chen
△	2019/07/06	Changed the part number	Jack Chen
△	2009/04/14	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□ :	☒ :	x. ±0.60	
CRITICAL	MAJOR	.x ±0.40	
▽ :	▽ :	.xx ±0.25	
ZERO DEFECT	S.P.C		

NAME:		LFH 59pin male solder connector			PART NO.		B04-059311AN-01	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2009/04/14	Huangmei	Jack Chen		B04-017	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			