


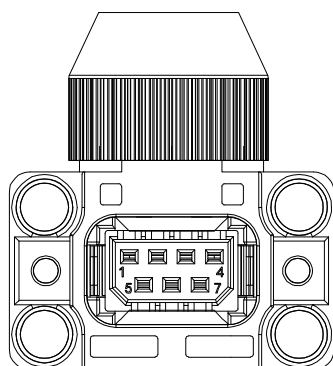
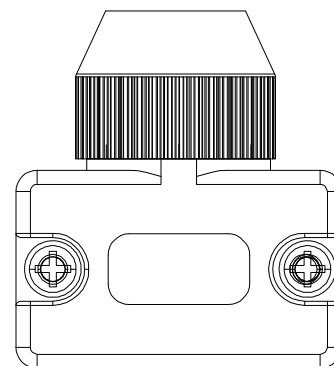
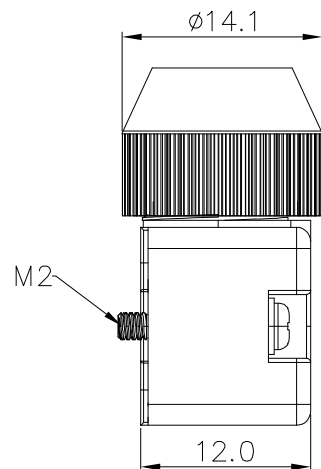


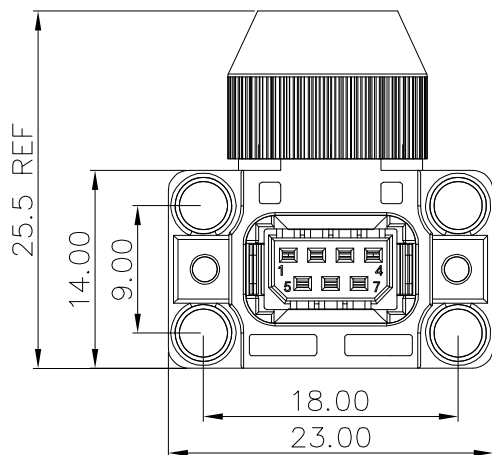

Positive direction outlet

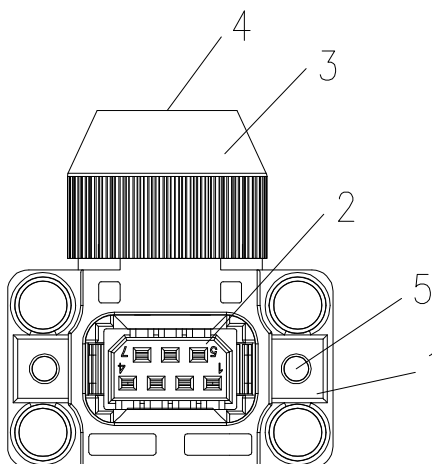

Opposite direction outlet

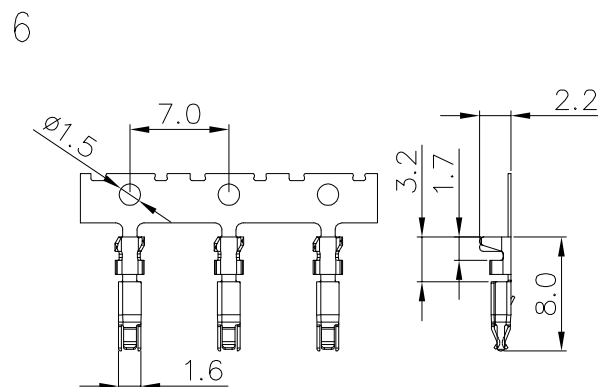

Current rating:1A
Voltage rating:100V AC
Insulation resistance:1000 MΩ Min at 500V DC
Withstand voltage:500V AC for 1 minute
Contact resistance:10 mΩ Max
Operation temperature: -40℃ to +125℃

Applicable cable:
Power terminal 22AWG~26AWG
Core wire outer dia:1.1~1.4mm
Cable outer dia:6.0~6.8mm

6	Terminal	Copper alloy	Plating: Au	7pcs
5	Screw M2.0	Stainless steel		2pcs
4	Waterproof ring	Rubber	Color: black	1pcs
3	Nut	PBT UL94V0	Color: black	1pcs
2	Housing	PA46 UL94V0	Color: black	1pcs
1	Hood	PA66 UL94V0	Color: black	1pcs
Item	Desc.	Material	Remark	Q'TY

△			
△			
△	2023/11/12	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SV-07P servo encoder connector for cable			PART NO.	B01-007210AA-01	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2023/11/12	Huangmei	Jack Chen		B01-076
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		