

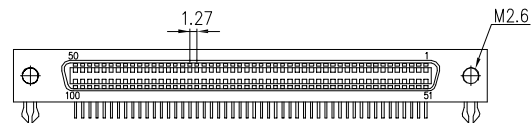

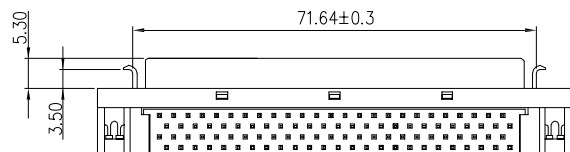
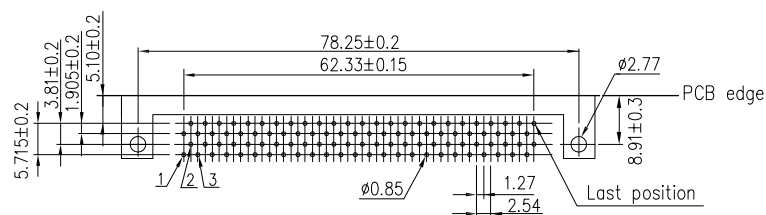


L type



S type



PCB layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B03-100611EB-0X

Bracket finishes:

L: latch bracket

S: screw bracket

6	Board lock	Copper alloy	Plating: Tin
5	Bracket	SPCC	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/05/29	Changed the part number	Jack Chen
△	2014/09/04	Add ROHS comment	Jing Li
△	2010/10/11	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: □: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI(HPCN) 100pin female right angle	PART NO.	B03-100611EB-0X
REV:	E	UNIT:	mm
SCALE:	N:1	DATE:	2010/10/11
DRW BY	John Liao	CHK BY	Jack Chen
APP BY		DRAWING NO.	B03-014

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770