
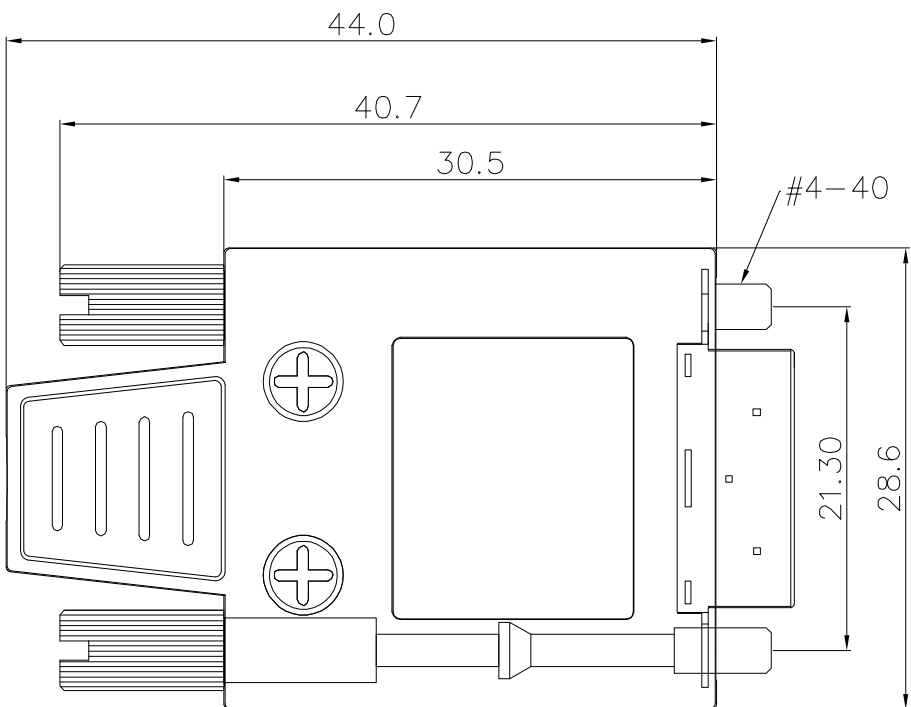


Current rating:1A
Withstanding voltage: 250V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

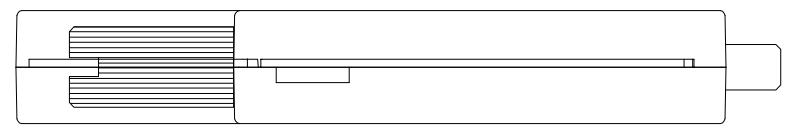

7	Screw	Steel	Plating: Ni
6	Cable clip	Steel	Plating: Ni
5	Hood	Zinc alloy	Plating: Ni
4	Cover	LCP+G.F.30%	Color: beige
3	Housing	LCP+G.F.30%	Color: beige
2	Sheel	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A		2021/06/27	Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance x. ±0.60 .x ±0.40 .xx ±0.25  		NAME:		Cisco 26pin(pitch 1.0mm) male solder, zinc alloy hood with screw				PART NO.		B06-0263C1A9-02	
		2021/04/14	Change electrical parameters	Jack Chen				REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-013		
		2014/09/23	First edition release	Jack Chen				SCALE:	N:1	DATE:	2014/09/23	Huangmei	Jack Chen				
	SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司								http://www.lineconn.com	
	8		7					6		5		4		3		2	
TEL:0769-85181660 85181770																	