

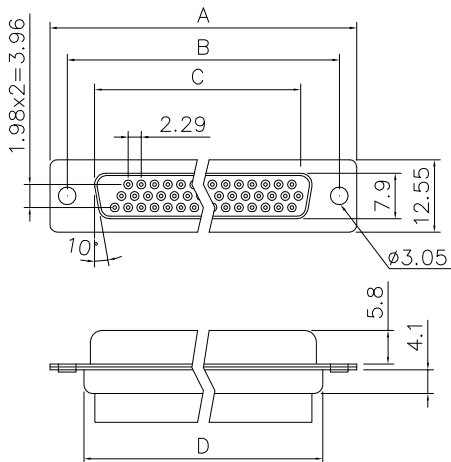



Pin No.	A	B	C	D
15	30.81	24.99	16.33	19.2
26	39.20	33.30	24.70	27.7
44	53.05	47.04	38.40	41.1
62	69.40	63.50	54.80	57.3

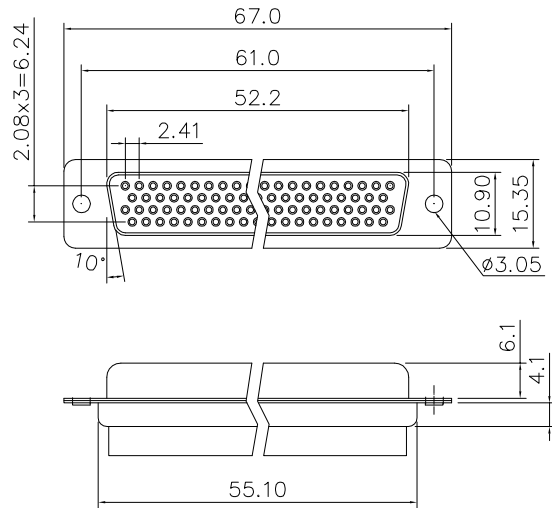

15,26,44,62pin



78pin



Current rating: 3 AMP.
Withstanding voltage: 1000V AC
Insulation resistance: 1000MΩ min.
Temperature range: -55℃ ~ +125℃
Durability: 500 cycles
ROHS compliant

Part number:
B04-0XX21100-02

Pin No.:
15: 15pin
26: 26pin
44: 44pin
62: 62pin
78: 78pin

3	Rear shell	SPCC	Palting: Sn
2	Front shell	SPCC	Palting: Ni
1	Housing	PBT+30%GF	Color: black
Item	Desc.	Material	Remark

△	2020/06/11	Change part number	Jack Chen
△	2019/03/02	Change the housing color to only black	Jing Li
△	2016/07/22	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	HD.D-SUB female crimp connector				PART NO.	B04-0XX21100-02		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2016/07/22	Qiang Liao	Jack Chen		B04-034	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			