

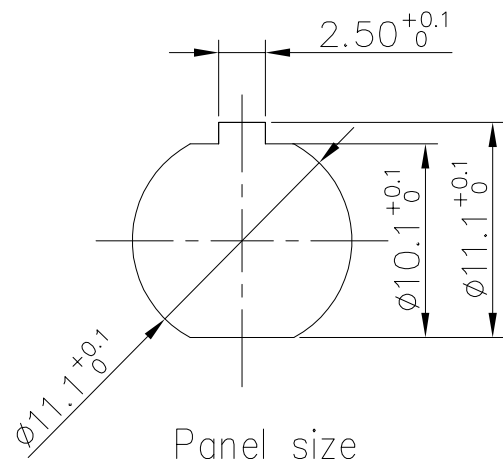
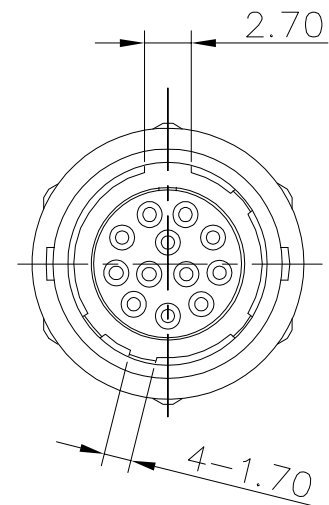
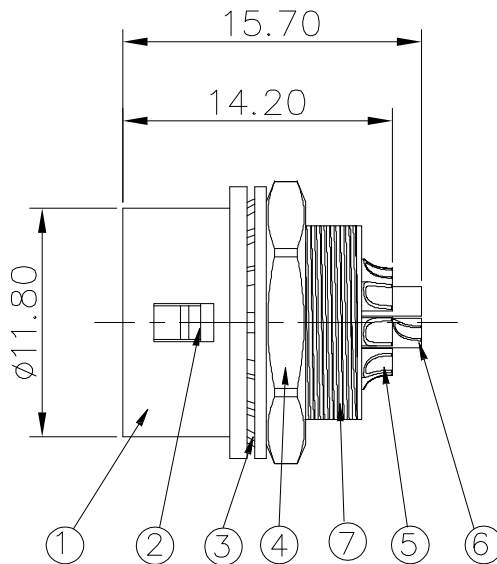


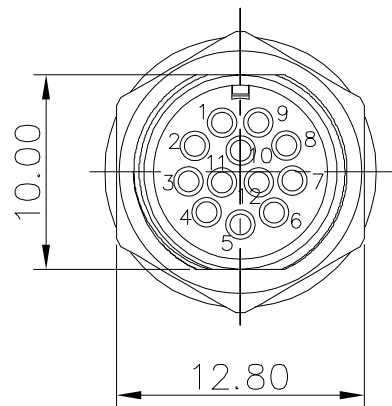

Current rating: 2A
Rated voltage: 100V
Contact resistance: 10mΩ Max.
Durability: 1000 cycles
Temperature range: -25°C to +85°C
ROHS compliant
Waterproof rating: IP67

7	Housing	PPS	Color: black
6	Terminal	Copper	Plating: Au
5	Terminal	Copper	Plating: Au
4	Nut	Copper	Plating: Ni
3	Gaskets	Stainless steel	Plating: Ni
2	Spring	QBe1.9	
1	Shell	Zinc alloy	Plating: Ni
Item	Desc.	Material	Remark

△	2023/04/22	Add dimension annotations	Carl Hu
△	2020/07/03	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		HR10A-10R-12S female solder rear lock panel			PART NO.	B10-02PZ12SH-KGD	
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2020/07/03	Yugong	Carl Hu		B10-094
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		