

F



E

D

C

B

A

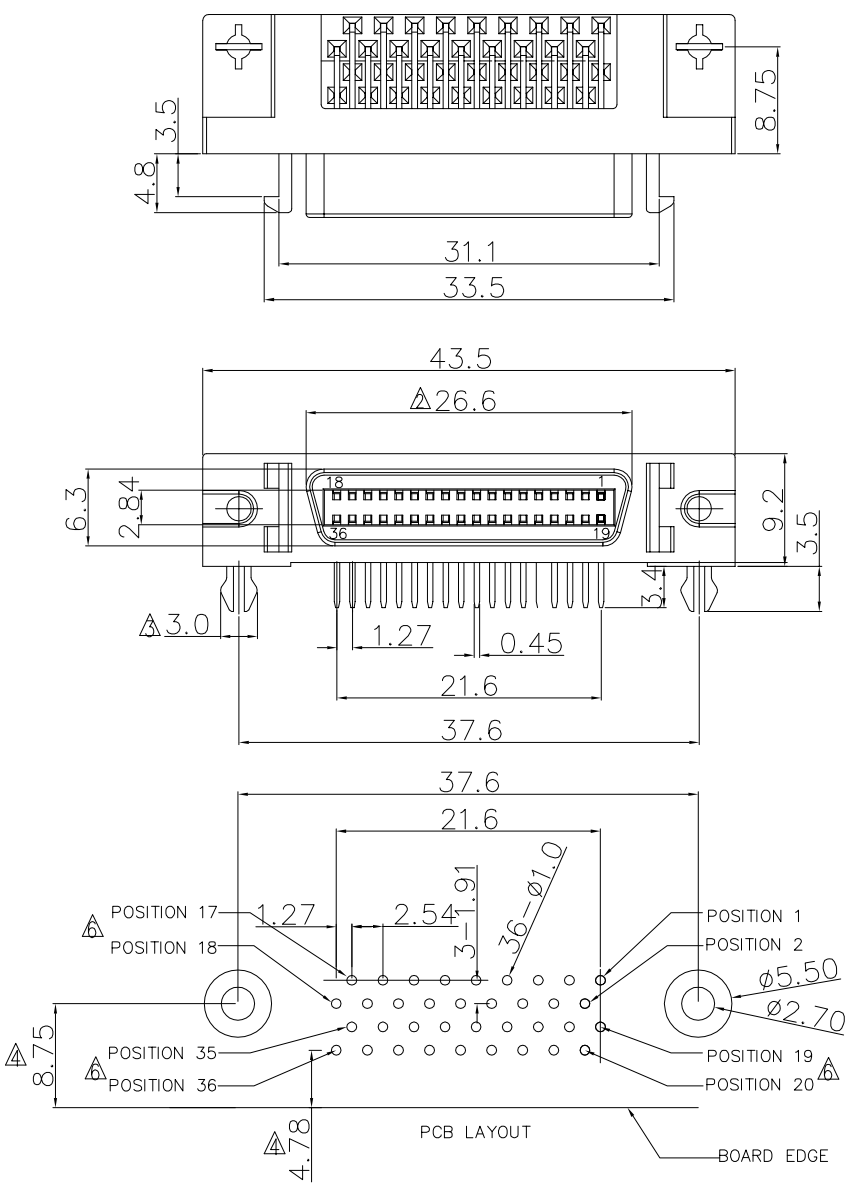

Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage: 500V AC
Contact resistance: 35 mΩ max.
ΔInsulation resistance: 500MΩ min.
Temperature range: -45℃ to +125℃

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy T=0.3mm	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

Δ	2025/07/08	Change PCB layout pin number	Jack Chen
Δ	2025/02/19	Change insulation resistance	Jack Chen
Δ	2015/04/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
.x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI 36pin female right angle				PART NO.	B03-036618A7-01	
REV:	F	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-004
SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		