


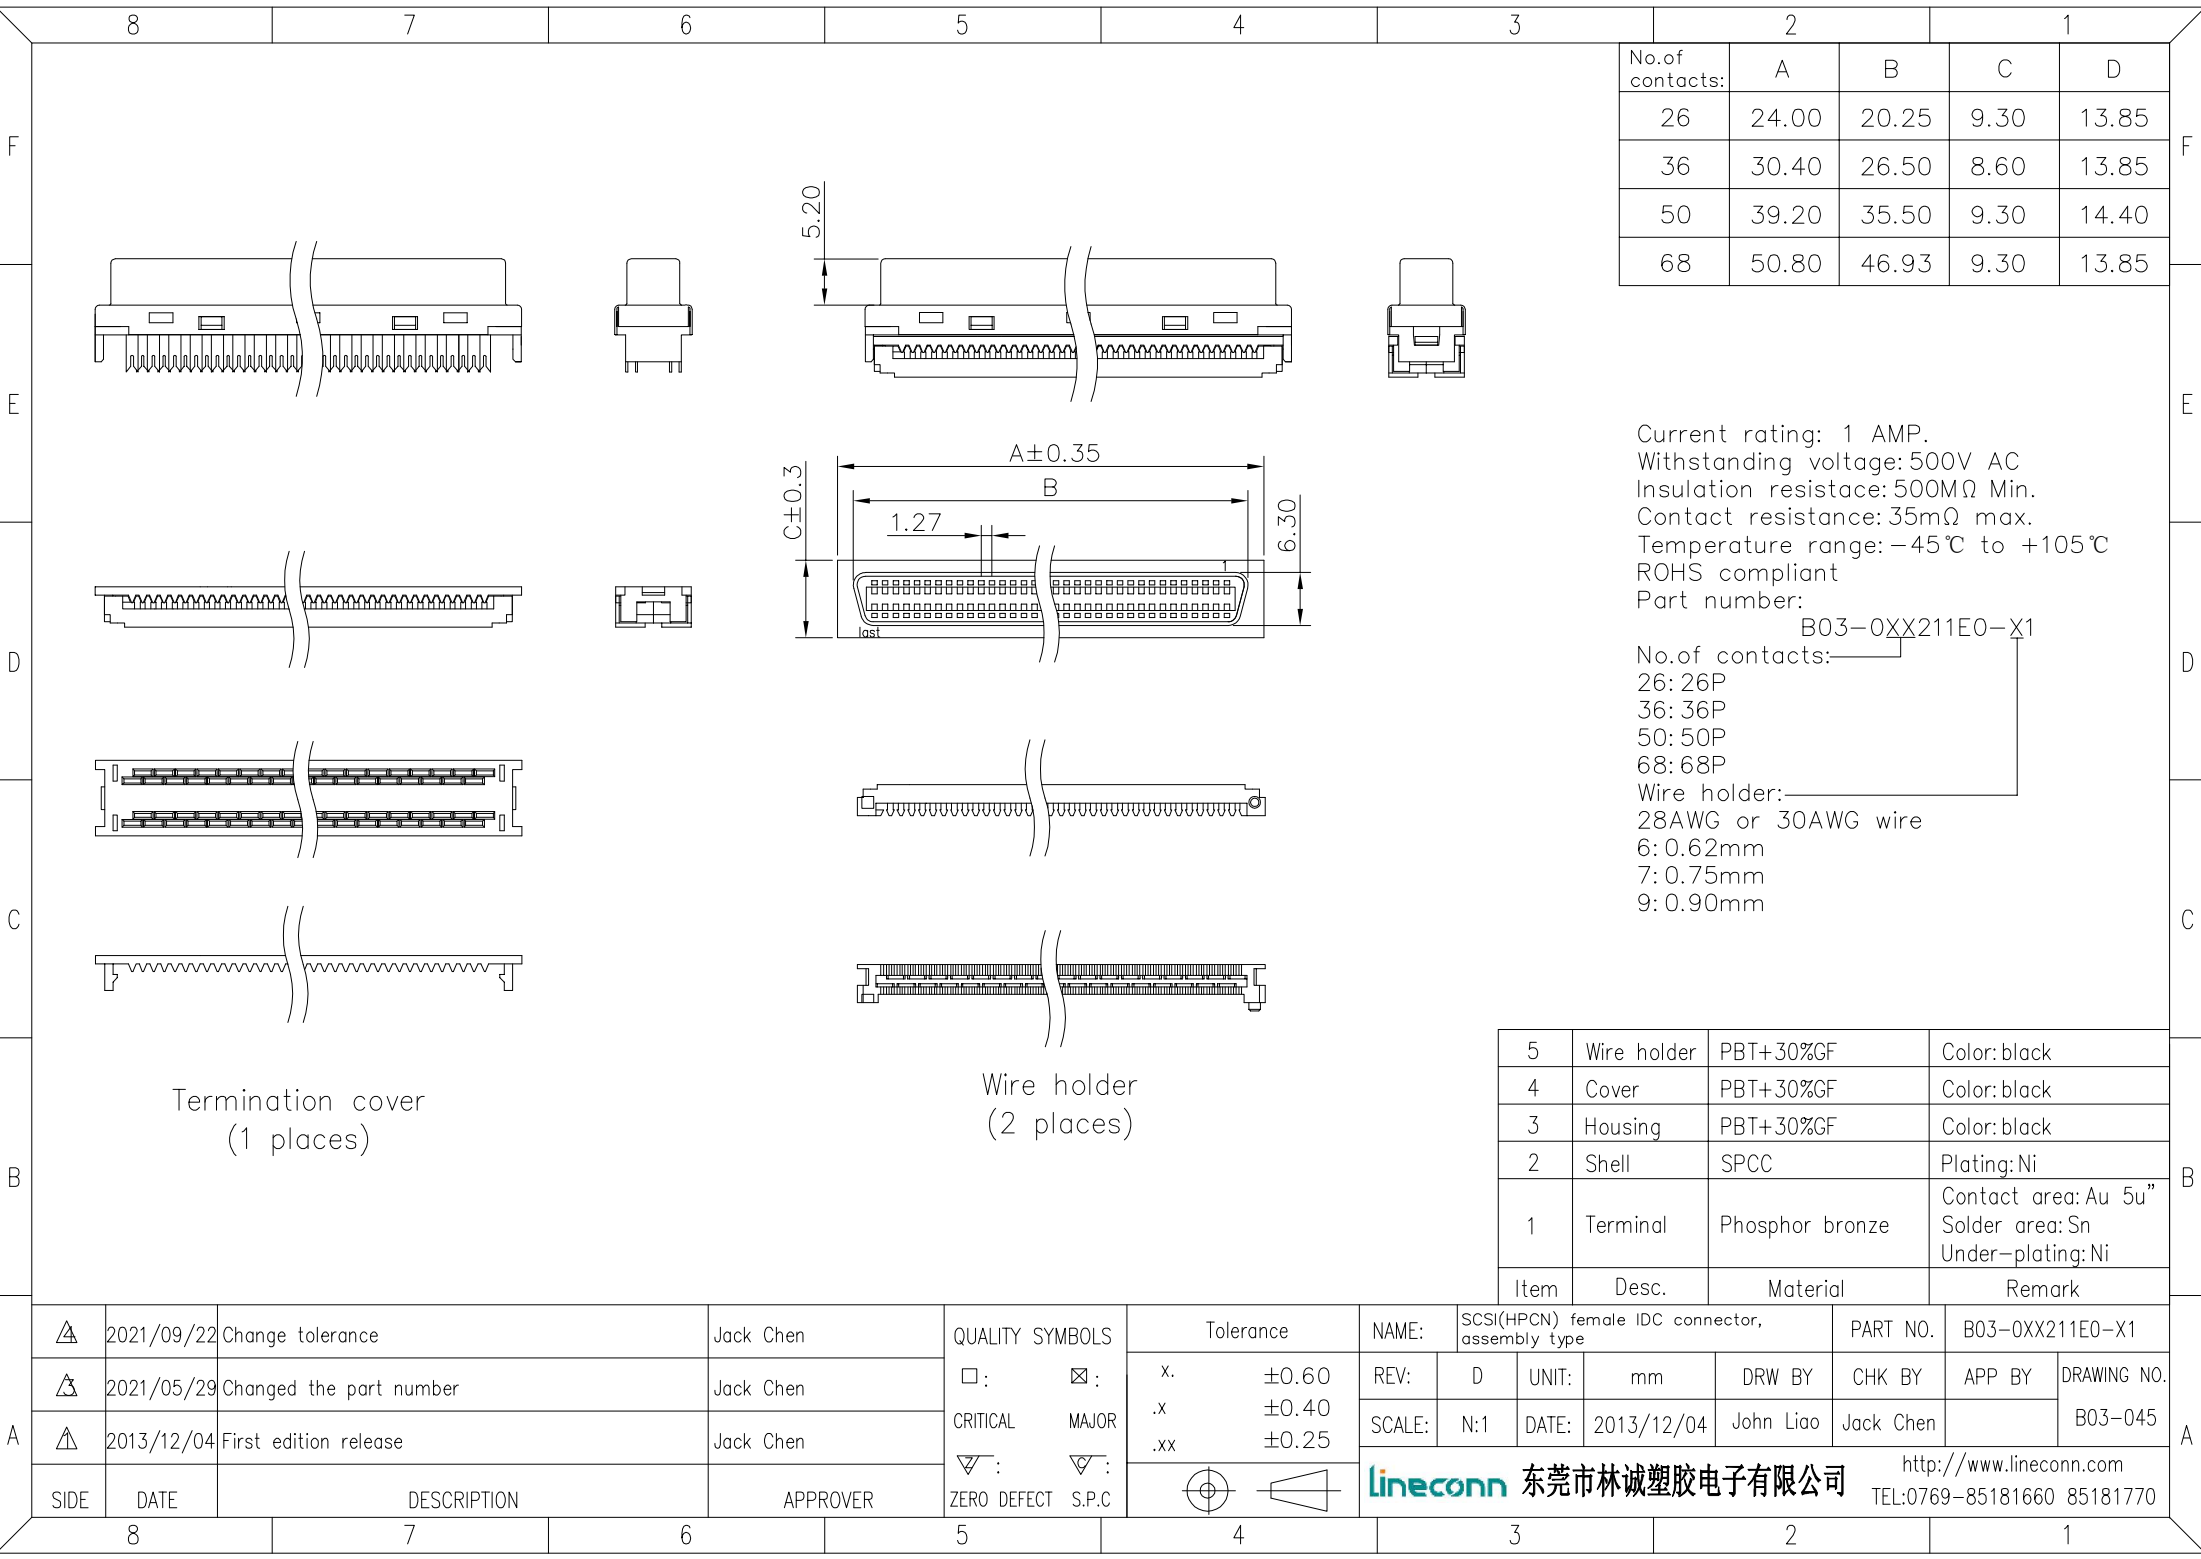


No.of contacts:	A	B	C	D
26	24.00	20.25	9.30	13.85
36	30.40	26.50	8.60	13.85
50	39.20	35.50	9.30	14.40
68	50.80	46.93	9.30	13.85

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B03-0XX211E0-X1
No.of contacts: _____
26: 26P
36: 36P
50: 50P
68: 68P
Wire holder: _____
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

5	Wire holder	PBT+30%GF	Color: black
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u” Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

A	△	2021/09/22	Change tolerance	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME: SCSI(HPCN) female IDC connector, assembly type				PART NO.		B03-0XX211E0-X1		A
	△	2021/05/29	Changed the part number	Jack Chen		x. ±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
	△	2013/12/04	First edition release	Jack Chen		.x ±0.40	SCALE:	N:1	DATE:	2013/12/04	John Liao	Jack Chen		B03-045		
						.xx ±0.25										
	SIDE	DATE	DESCRIPTION			APPROVER			lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com			
											TEL:0769-85181660 85181770					
8		7		6		5		4		3		2		1		