

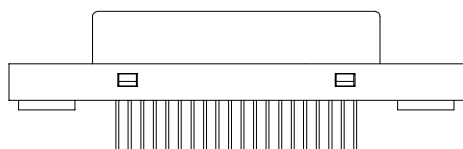



L type

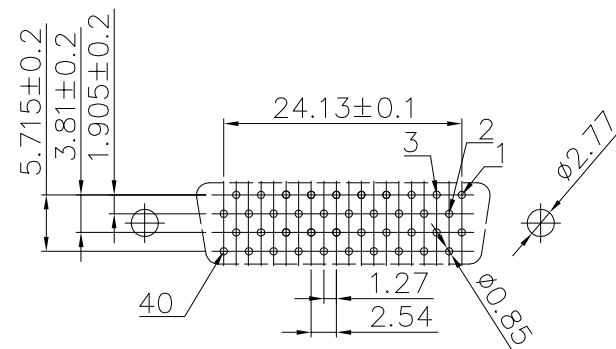

S type

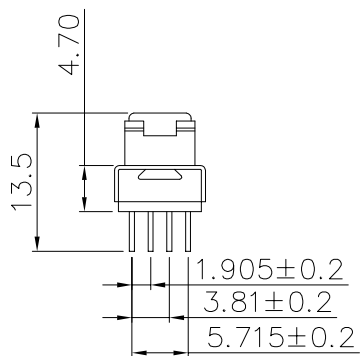

PCB layout

Current rating: 1A
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant
Part number:

B03-040811EB-0X

Bracket finishes: _____
L: latch bracket
S: screw bracket

4	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
3	Bracket	SPCC	Plating: Ni
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/05/12	Change part number	Carl Hu
△	2014/03/22	Change tolerance	King Zhou
△	2010/10/14	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
⊕	⊖

NAME:	SCSI 40pin female vertical for PCB				PART NO.	B03-040811EB-0X	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-015
SCALE:	N:1	DATE:	2010/10/14	Yugong	Carl Hu		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		