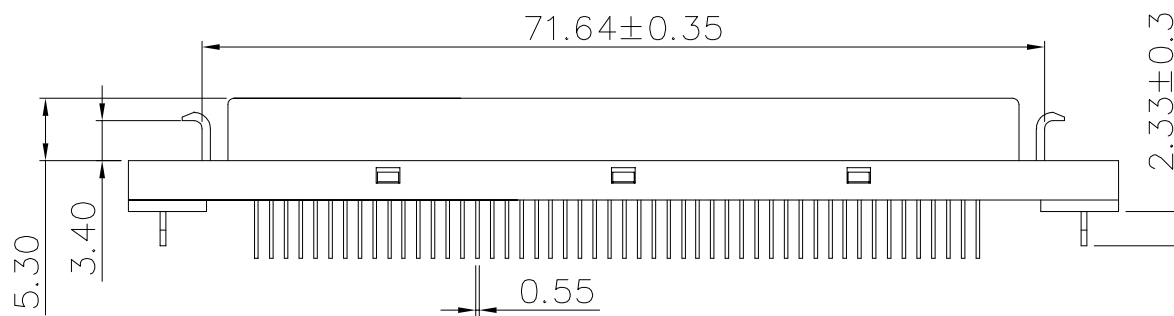
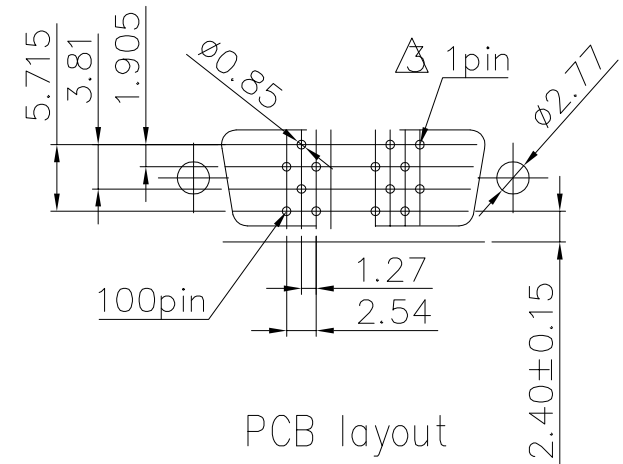
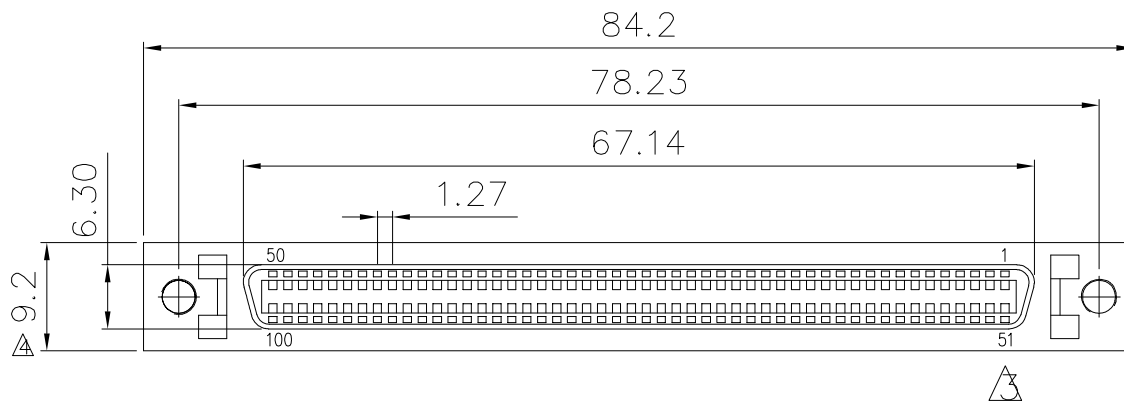


Current rating: 1A
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant

4	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
3	Bracket	SPCC	Plating: Ni
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2022/04/07	Change tolerance	Carl Hu
△	2021/09/29	Correct pin position labels and add PCB layout pin position annotations.	Jack Chen
△	2010/10/11	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
 	

NAME:	SCSI 100pin female vertical for PCB				PART NO.	B03-100811EB-0L		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2010/10/11	Yugong	Carl Hu		B03-013	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			