



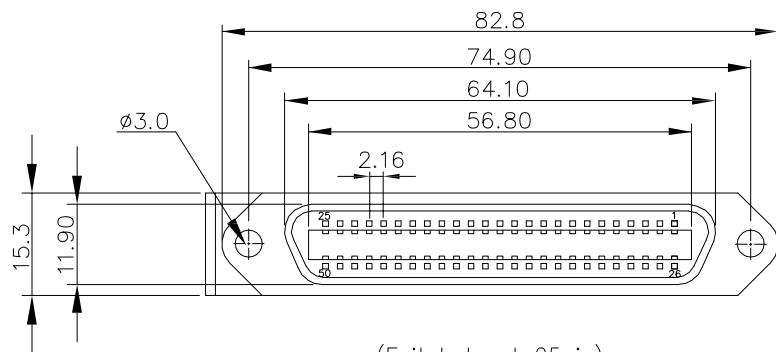




(Exit hole at 25pin)





(Exit hole at 1pin)

Current rating: 5A
Withstanding voltage: 500V AC
Insulation resistance: >1000 mΩ/Min
Contact resistance: 30mΩ/Max
Operation temperature: -55℃~+125℃
ROHS compliant
Part No.:

B17-0504X1A6-0X
Housing color: _____
1: Black
6: Blue
Exit hole: _____
A: Exit hole at 1pin
B: Exit hole at 25pin

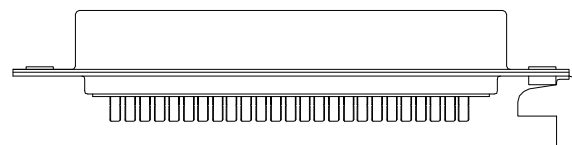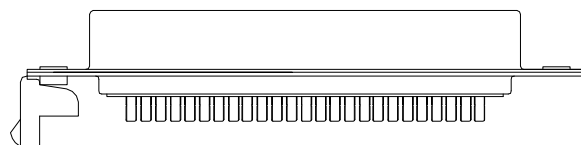

Cable clipper

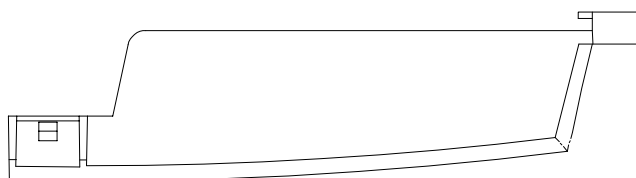

7	Screws	Steel	Plating: Ni
6	Hood	ABS	Color: black
5	Rear shell	Steel	Plating: Ni
4	Front shell	Steel	Plating: Ni
3	Housing	P.B.T UL94V-0	Color: see part no.
2	Cable clipper	ABS	Color: black
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△			
△			
△	2017/04/26	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		Centronics(57) 50pin traditional female solder,with plastic hood right angle exit			PART NO.		B17-0504X1A6-0X	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2017/04/26	Huangmei	Jack Chen		B17-022	
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			