
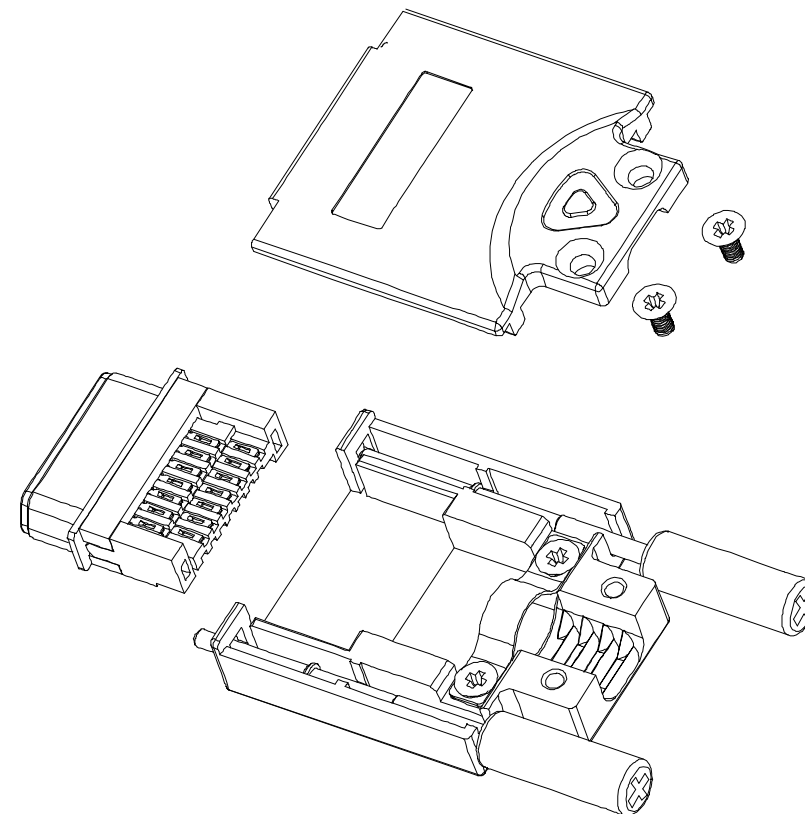
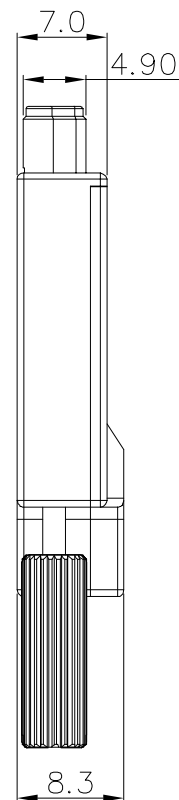
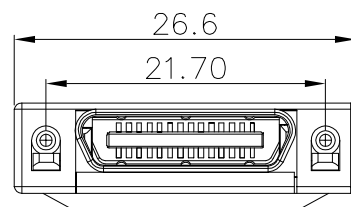


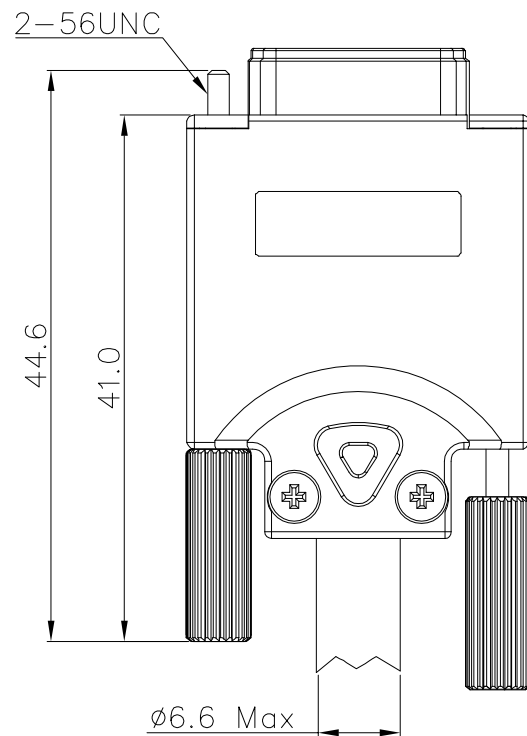

Current rating: 1A
Withstanding voltage: 250V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

7	Screw	Steel	Plating: Ni
6	Cable clip	Steel	Plating: Ni
5	Up hood	Zinc alloy	Plating: Ni
4	Down hood	Zinc alloy	Plating: Ni
3	Housing	LCP+G.F.30%	Color: black
2	Sheel	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/14	Change part number	Jack Chen	QUALITY SYMBOLS □: ☒: .x. ±0.60 CRITICAL MAJOR .x ±0.40 .xx ±0.25 ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME: HD-VI 28pin male solder, zinc alloy hood with screw				PART NO.		B06-028318C8-01	
	2020/12/09	Change electrical parameters	Jack Chen		REV: C		UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO. B06-021			
	2020/11/23	First edition release	Jack Chen		SCALE: N:1		DATE: 2020/11/23	Huangmei	Jack Chen					
SIDE	DATE	DESCRIPTION	APPROVER				lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770							