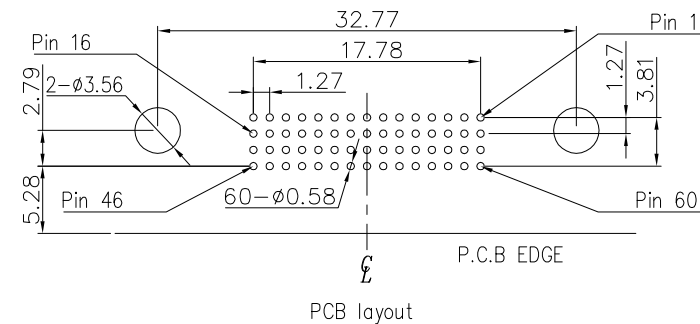

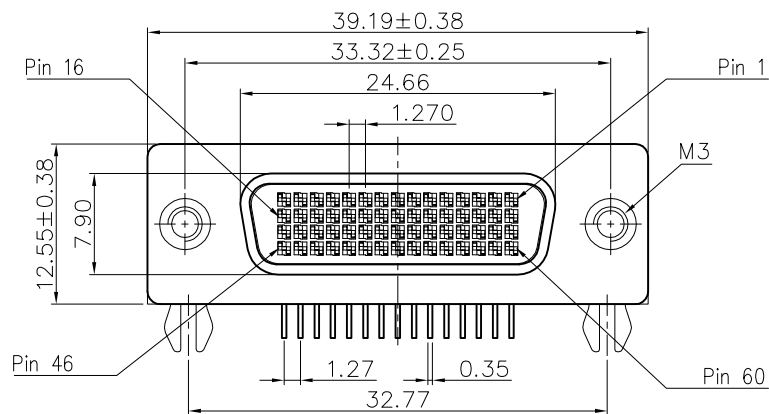


Current rating: 3A
Withstanding voltage: 500V DC
Insulation resistance: 500M Ω min.
Contact resistance: 35m Ω Max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

7	Screw	Steel	Plating: Ni
6	Rivet	Copper alloy.	Plating: Sn
5	Board lock	Copper alloy	Plating: Sn
4	Latch	LCP UL 94V-0	Color: Ivory
3	Housing	LCP UL 94V-0	Color: Ivory
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

	2020/09/24	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
		x.	± 0.60
		.x	± 0.40
		.xx	± 0.25

NAME:	LFH 60pin female right angle				PART NO.	B04-0606C1AD-02		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2020/09/24	Huangmei	Jack Chen		B04-080	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			