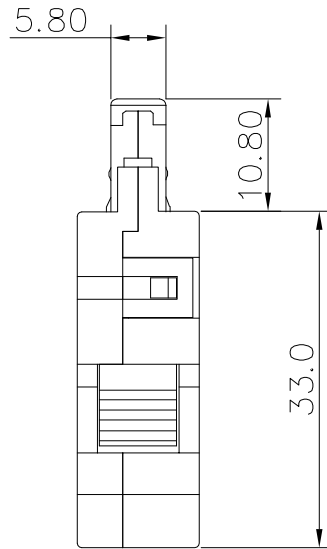
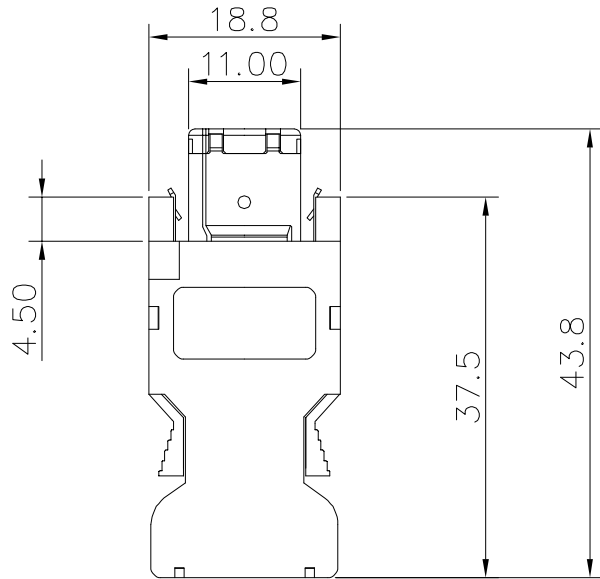



Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant

5	Latch	SUS 304	
4	Hood	ABS	Color: gray
3	Housing	PBT+30%GF	Color: black
2	Shell	Spcc	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: G/F Under-plating: Ni
Item	Desc.	Material	Remark

	2022/07/04	Add ROHS comment	Carl Hu	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		SM(1394) 6pin male solder connector				PART NO.		B01-006321A1-01	
	2017/03/29	Change Tolerance	King Zhou		x.	±0.60	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B01-006		
	2016/07/14	First edition release	King Zhou		.x	±0.40	SCALE:	N:1	DATE:	2016/07/14	Yugong	Carl Hu				
					.xx	±0.25	东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770									
SIDE	DATE	DESCRIPTION	APPROVER													

http://www.lineconn.com
TEL:0769-85181660 85181770