

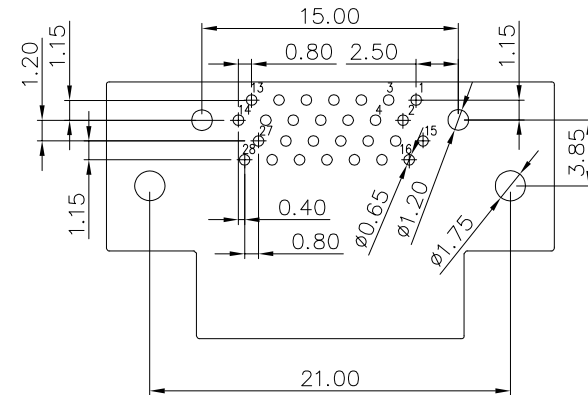
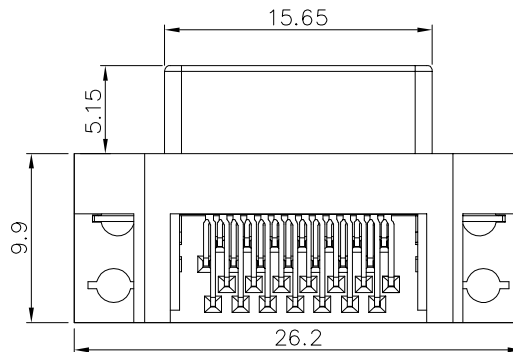
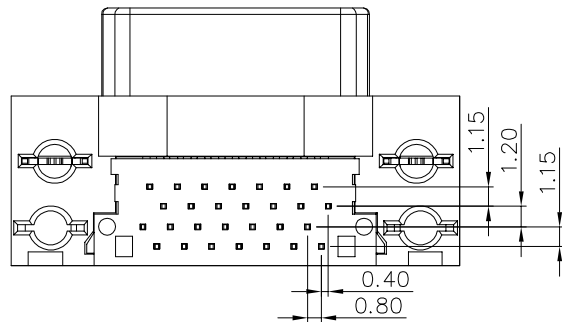
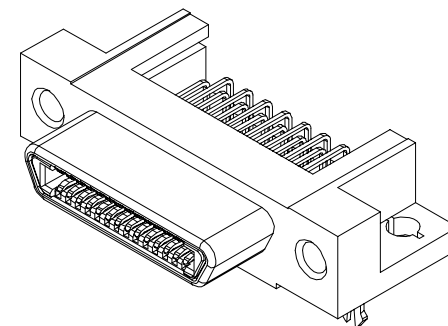


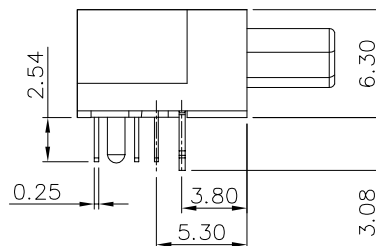

PCB layout

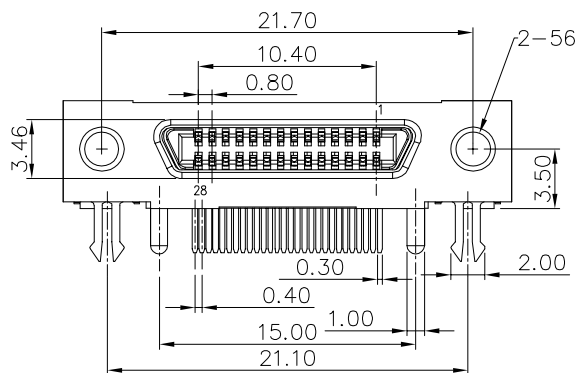

Current rating:1A
Withstanding voltage:250V AC
Contact resistance : 35mΩ max.
Insulation resistance:500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP,UL94 V-0	Color: black
3	Housing	LCP,UL94 V-0	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

△	2019/08/13	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25
⊙	⚡

NAME:	HD-VI 28pin female right angle				PART NO.	B06-028618AC-01		
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2019/08/13	Huangmei	Jack Chen		B06-028	