

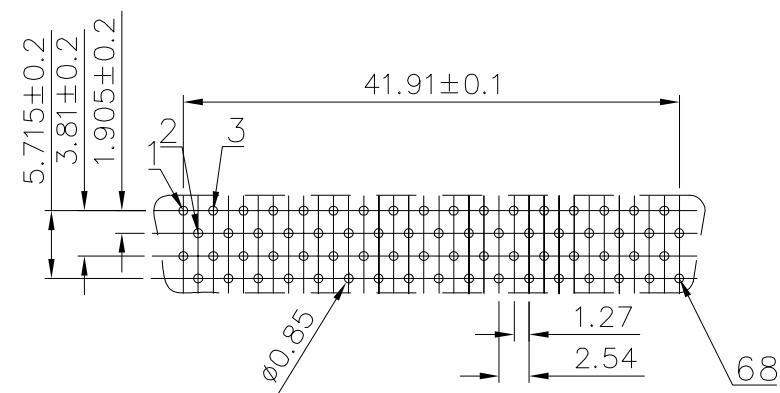
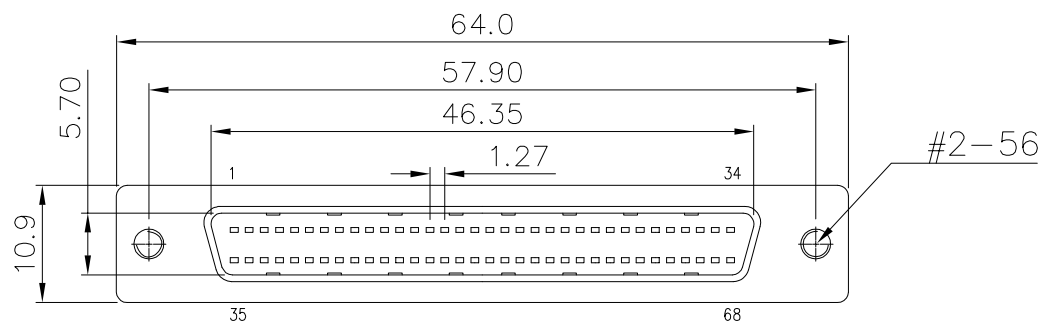




PCB layout

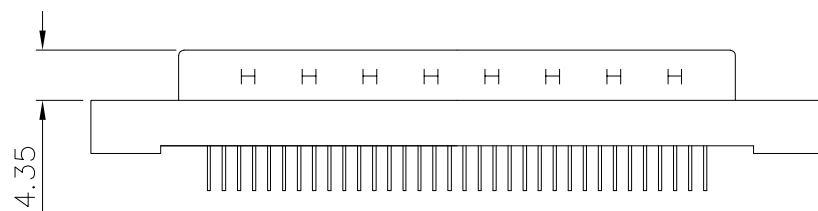

Current rating: 1A
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant

4	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
3	Bracket	Zinc alloy	Plating:Ni
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME:		SCSI II(HPDB) 68pin male vertical with bracket for PCB			PART NO.		B02-068711EN-1S		Remark
	2021/05/24	Change part number,Change tolerance	Dean Fan	☐ : ☒ :	x. ±0.60	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
	2016/07/19	First edition release	King Zhou	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2016/07/19	Jack Chen	Dean Fan		B02-057			
SIDE	DATE	DESCRIPTION	APPROVER	☒ : ☒ : ZERO DEFECT S.P.C	 	 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770										

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770