


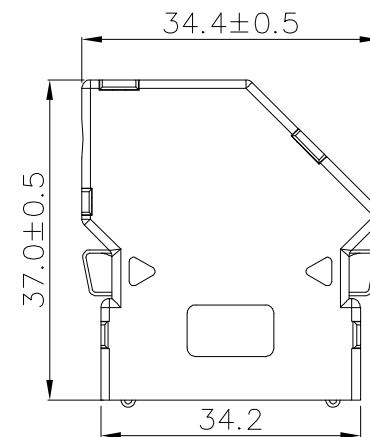
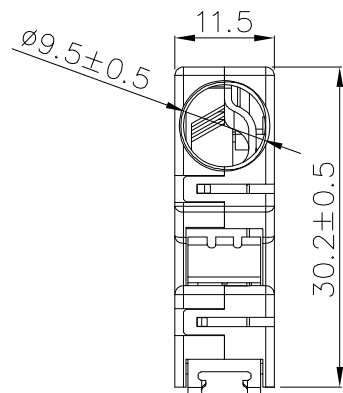
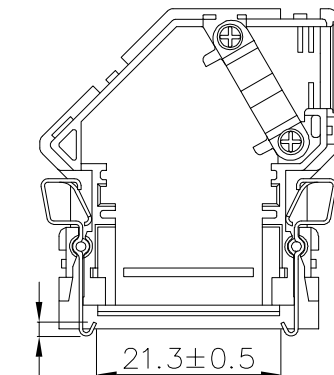









Current rating: 1A
Contact resistance: 35mΩ max.
Withstanding voltage: 500V AC
Insulation resistance: 500mΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:
B01-020421A4-X4
Cable clip: _____
1: Small size clip
2: Large size clip



Small size clip



Large size clip



7	Cable clip	Steel	Plating: Ni
6	Screw	Steel	Plating: Ni
5	Spring latch	Stainless steel	
4	Hood	PC UL94V-0	Color: gray
3	Housing	PA9T UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: G/F Solder area: Sn Under-plating: Ni

Item	Desc.	Material	Remark
7	Cable clip	Steel	Plating: Ni
6	Screw	Steel	Plating: Ni
5	Spring latch	Stainless steel	
4	Hood	PC UL94V-0	Color: gray
3	Housing	PA9T UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: G/F Solder area: Sn Under-plating: Ni

△				QUALITY SYMBOLS	Tolerance	NAME:	PCR-20F 20pin female solder conn. cable comes out the side	PART NO.	B01-020421A4-X4
△				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm
△	2025/06/10	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2025/06/10
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx ±0.25			Yugong	Carl Hu

△				QUALITY SYMBOLS	Tolerance	NAME:	PCR-20F 20pin female solder conn. cable comes out the side	PART NO.	B01-020421A4-X4
△				□: ☒:	x. ±0.60	REV:	A	UNIT:	mm
△	2025/06/10	First edition release	Carl Hu	CRITICAL MAJOR	.x ±0.40	SCALE:	N:1	DATE:	2025/06/10
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C	.xx ±0.25			Yugong	Carl Hu

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL: 0769-85181660 85181770