


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant
Part number:

B02-06871NEN-X1


PCB layout: _____

A: PCB layout A

B: PCB layout B

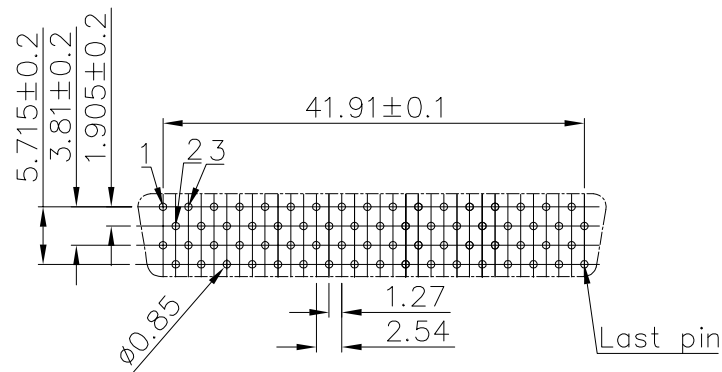

PCB layout A

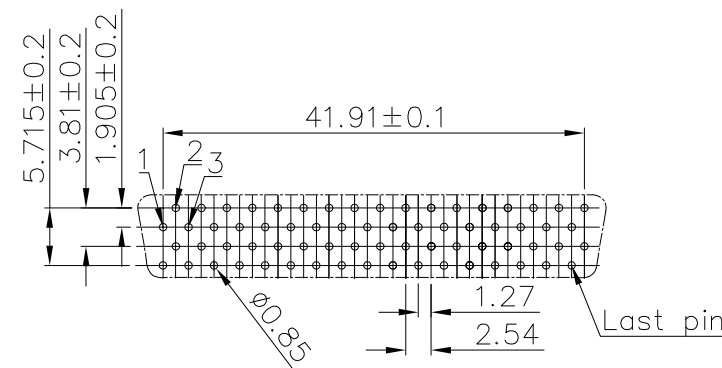

PCB layout B

2	Housing	PBT+G.F.30%	Color: black
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/07/04	Change part number	Carl Hu
△	2017/12/19	Change tolerance	Dean Fan
△	2017/09/05	First edition release	Dean Fan

QUALITY SYMBOLS
□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI II (HPDB) 68pin male vertical for PCB,all plastic				PART NO.	B02-06871NEN-X1		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2017/09/05	Yugong	Carl Hu		B02-069	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770