


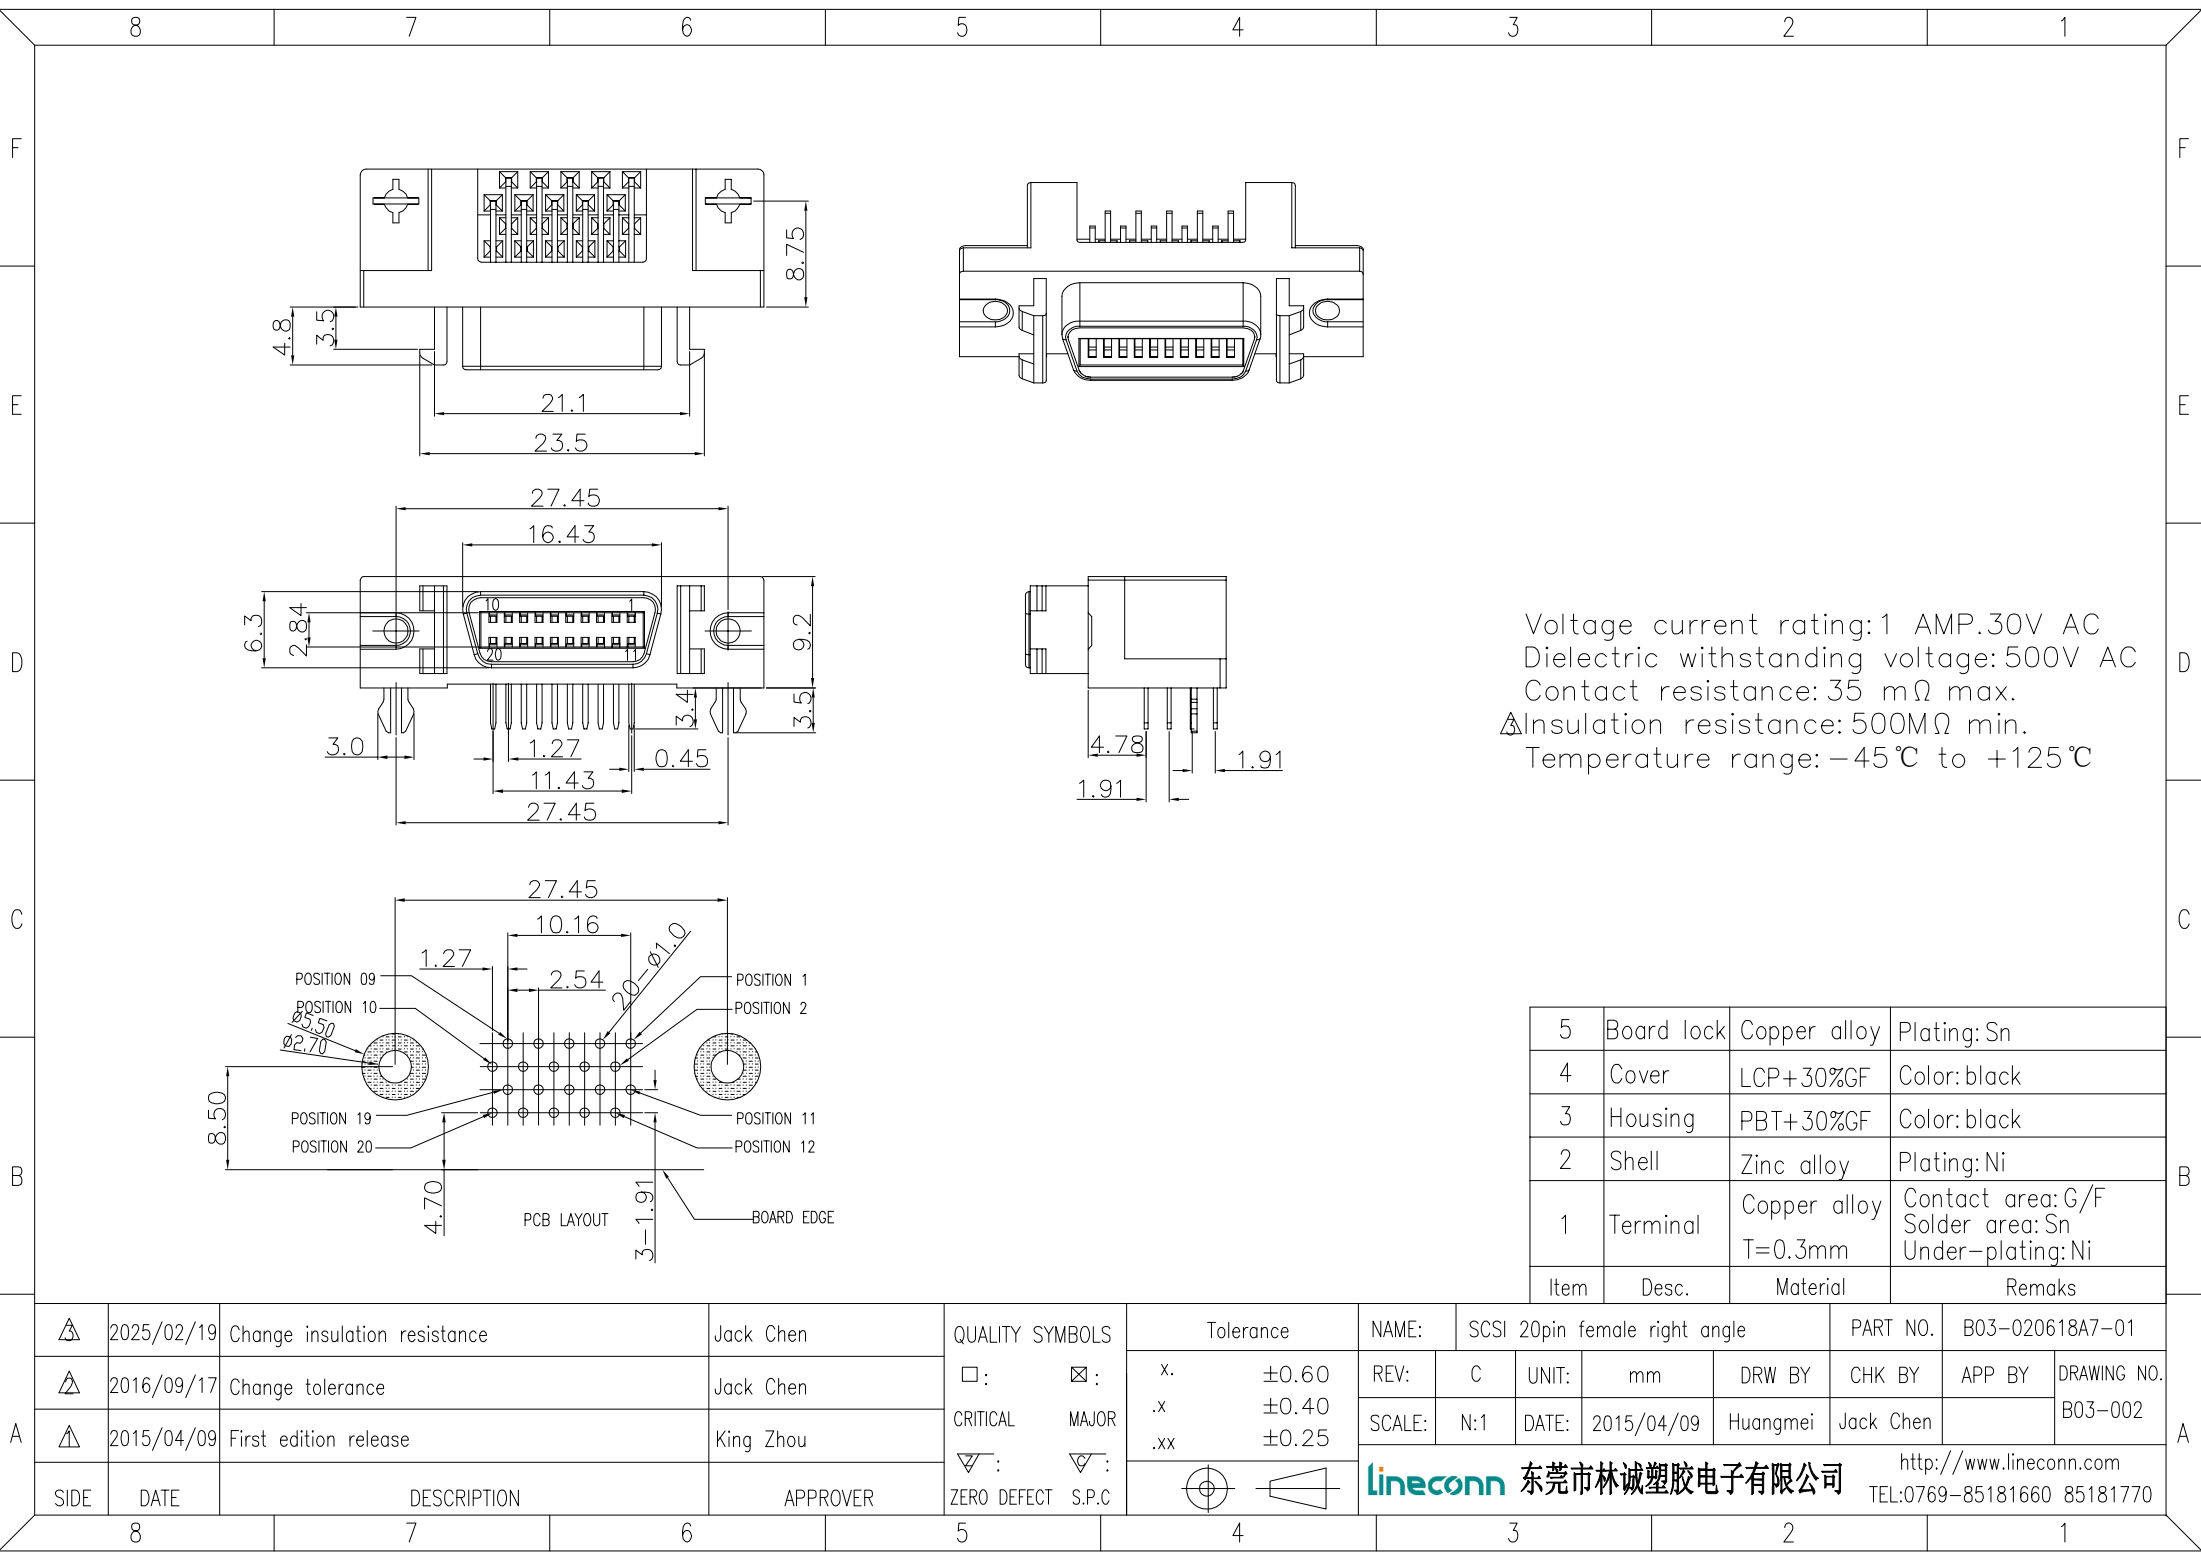

Voltage current rating:1 AMP.30V AC
Dielectric withstanding voltage:500V AC
Contact resistance:35 mΩ max.
ΔInsulation resistance:500MΩ min.
Temperature range:−45℃ to +125℃

5	Board lock	Copper alloy	Plating: Sn
4	Cover	LCP+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy T=0.3mm	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remaks

Δ	2025/02/19	Change insulation resistance	Jack Chen
Δ	2016/09/17	Change tolerance	Jack Chen
Δ	2015/04/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI 20pin female right angle				PART NO.	B03-020618A7-01	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B03-002
SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		