

No. of Pin	Dimensions						
	A	B	C	D	E	F	G
14	7.62	9.52	12.60	29.51	23.64	17.25	19.58
26	15.24	17.24	20.24	37.13	31.26	24.76	27.20
50	30.48	32.29	35.39	52.37	46.50	40.00	42.20

Current rating: 1 Amp
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:

B03-0XX618A7-02






No. of contact: _____
14: 14pin
26: 26pin
50: 50pin

5	Bracket	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni

Item	Desc.	Material	Remark
5	Bracket	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni

http://www.lineconn.com
TEL: 0769-85181660 85181770

PCB layout

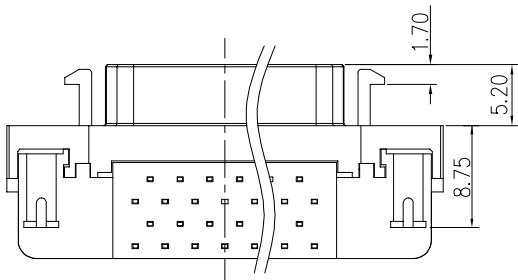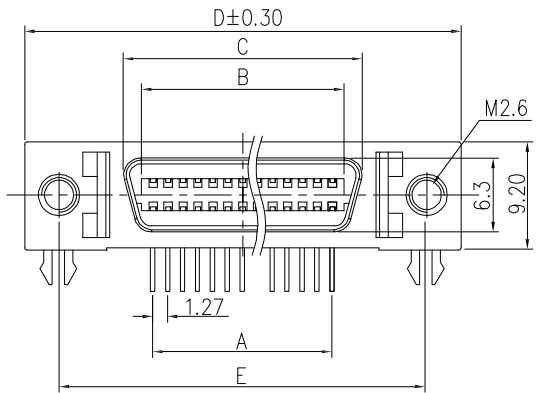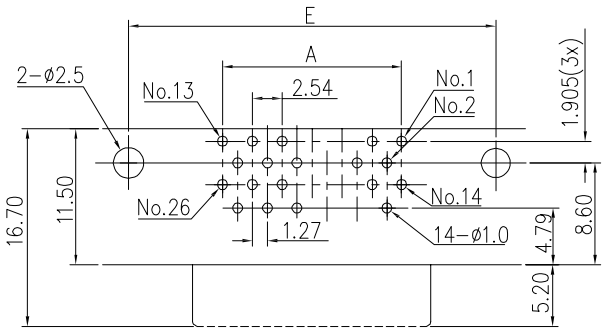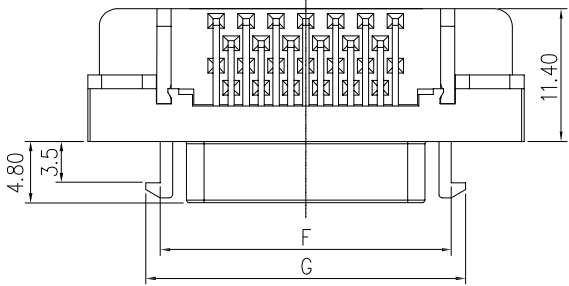

△	2021/06/12	Change part number	Shuo Cao
△	2019/04/02	Change tolerance	King Zhou
△	2018/11/09	First edition release	King Zhou

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS
□: □: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI(HPCN) female right angle	PART NO.	B03-0XX618A7-02
REV:	D	UNIT:	mm
SCALE:	N:1	DATE:	2018/11/09
DRW BY	John Liao	CHK BY	Shuo Cao
APP BY		DRAWING NO.	B03-084

lineconn 东莞市林诚塑胶电子有限公司