
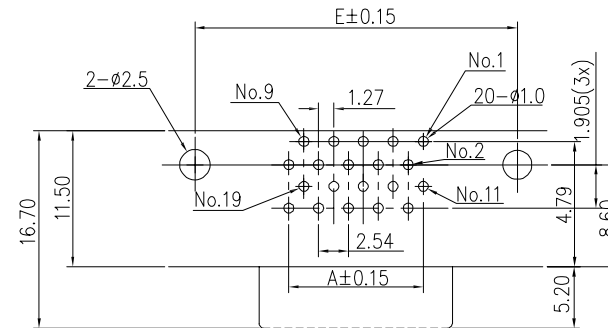


No. of Pin	Dimensions						
	A	B	C	D	E	F	G
20	11.43	13.1	16.43	33.32	27.45	21.06	23.39
36	21.59	23.4	26.5	43.48	37.61	31.11	33.55

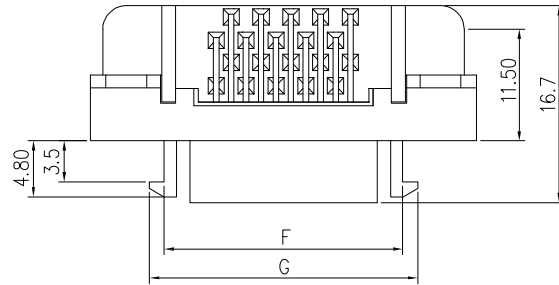

PCB layout




Current rating: 1 Amp
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:

B03-0XX618A7-02

No. of contact: _____

20: 20pin

36: 36pin

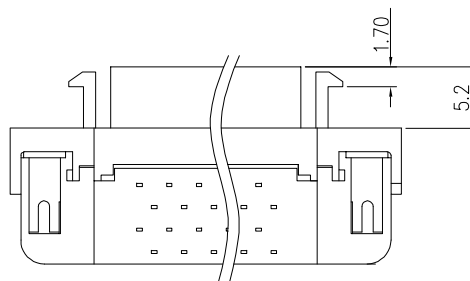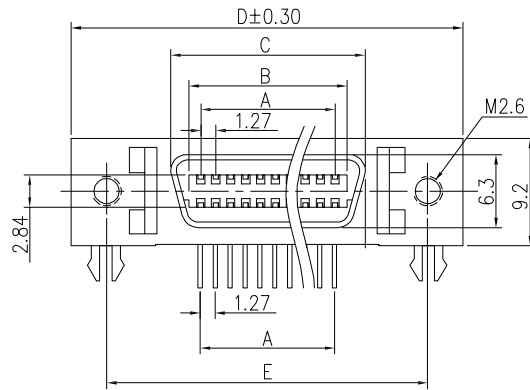

5	Bracket	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Copper alloy	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/12	Change part number	Shuo Cao
△	2019/04/02	Change tolerance	King Zhou
△	2018/11/09	First edition release	King Zhou

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI(HPCN) female right angle 20,36pin				PART NO.	B03-0XX618A7-02	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/11/09	John Liao	Shuo Cao		B03-085
东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------