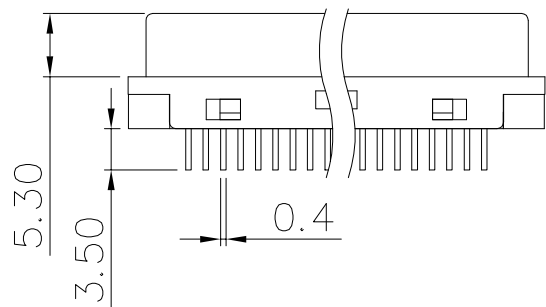
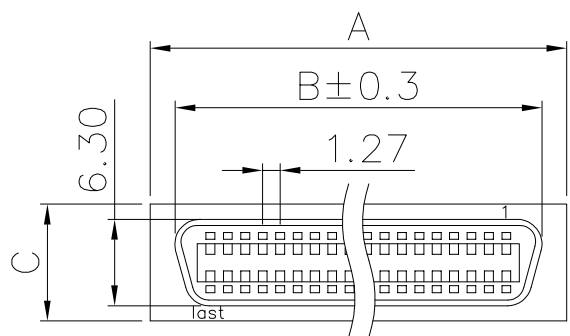


No.of contacts:	A	B	C
26	24.0	20.25	9.3
36	30.4	26.50	8.6
50	39.2	35.50	9.3
68	50.6	46.93	9.3

Current rating: 1A
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -55℃ to +125℃
ROHS compliant

Part number:

B03-0XXF11EN-X1

No.of contacts:

26: 26P

36: 36P

50: 50P

68: 68P

PCB mounting:

A: 1.0mm(for PCB 1.2mm)

B: 1.4mm(for PCB 1.6mm)

3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni

Item	Desc.	Material	Remark
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni

△	2021/05/17	Change part number	Carl Hu
△	2014/01/04	Change tolerance	King Zhou
△	2013/10/23	First edition release	King Zhou


QUALITY SYMBOLS
□: CRITICAL
▽: ZERO DEFECT
☒: MAJOR
▽: S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI(HPCN) female clip type for PCB, assembly connector			
REV:	D	UNIT:	mm	DRW BY
SCALE:	N:1	DATE:	2013/10/23	Yugong

PART NO.	B03-0XXF11EN-X1
CHK BY	Carl Hu
APP BY	
DRAWING NO.	B03-059

SIDE	DATE	DESCRIPTION	APPROVER
8	7	6	5



Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770