


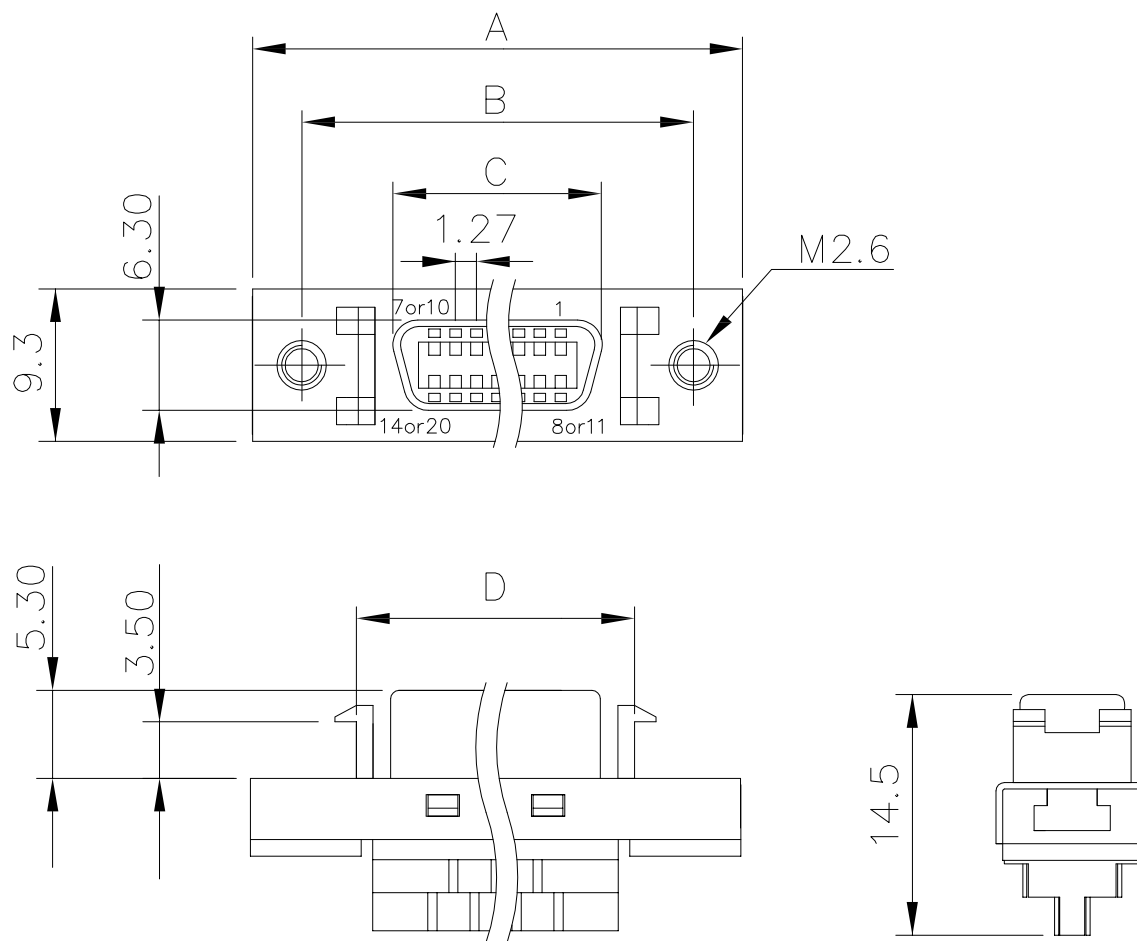

No.of contacts:	A	B	C	D
14	29.60	23.64	12.63	16.80
20	33.40	27.44	16.44	20.60

Current rating: 1 AMP.
 Withstanding voltage: 100V AC
 Insulation resistance: 500M Ω Min.
 Contact resistance: 35m Ω max.
 Temperature range: -55 $^{\circ}$ C to +125 $^{\circ}$ C
 ROHS compliant
 Part No.:

B03-0XX411EB-0L

No.of contact: _____
 14: 14pin
 20: 20pin

5	Bracket	SPCC	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remarks

SCSI(HPCN) female solder with bracket(14pin,20pin)				PART NO.		B03-0XX411EB-0L	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/09/24	Lichuan	Jack Chen		B03-111

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
 TEL: 0769-85181660 85181770

	2018/09/24	First edition release	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
		x.	± 0.60
CRITICAL	MAJOR	.x	± 0.40
		.xx	± 0.25
ZERO DEFECT	S.P.C		