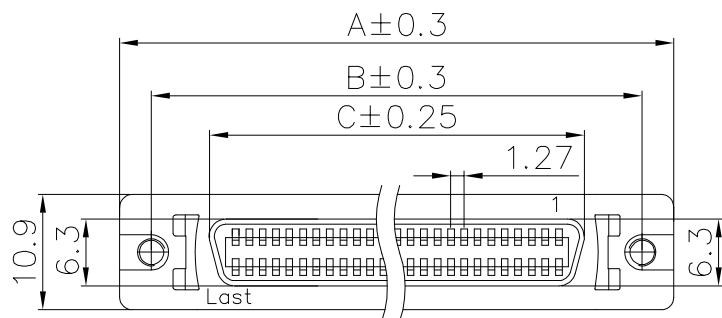


Current rating: 1A
Withstanding voltage: 500V AC
Contact resistance : 35mΩ max.
Insulation resistance: 500MΩ Min.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B03-0XX418EB-0X
No. of contacts: _____
26: 26P
36: 36P
50: 50P
68: 68P
Bracket finishes: _____
L: latch bracket
S: screw bracket

Dimensions:

No. of contacts:	A	B	C	D
26	37.20	31.20	20.25	24.70
36	43.50	37.60	26.60	31.00
50	52.60	46.50	35.40	40.10
68	64.00	57.90	46.90	51.00

4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	Zinc alloy	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/11/09	Change tolerance	Carl Hu
△	2020/06/24	Changed the part number	Shuo Cao
△	2011/06/11	First edition release	King Zhou


SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS

□: ☒:
CRITICAL MAJOR
▽: ▽:
ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:	SCSI(HPCN) female solder, with bracket 26,36,50,68pin				PART NO.	B03-0XX418EB-0X		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/06/11	Yugong	Carl Hu		B03-044	

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL: 0769-85181660 85181770