


NO. of Contacts	A	B	C	D	E	F	G
20	33.38	27.45	16.44	20.83	12.07	16.51	27.45
26	37.19	31.26	20.25	24.64	15.88	20.32	31.26
36	43.54	37.61	26.60	31.08	22.23	26.67	37.61

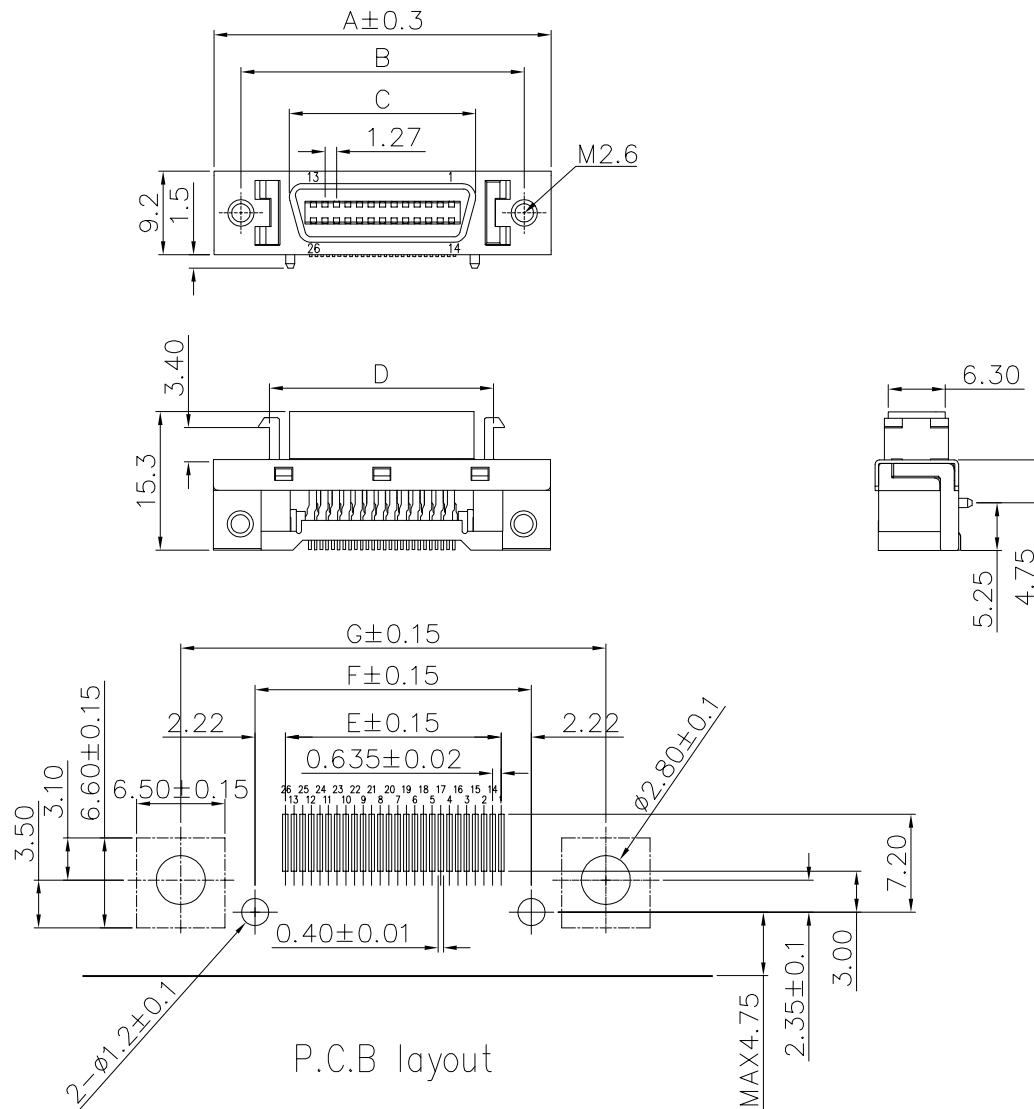

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part number:

B03-0XX011EB-01

No. of contacts: _____
20: 20P
26: 26P
36: 36P

3	Housing	PA-9T	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

	2020/06/28	Change part number	Jack Chen
	2016/11/25	Change tolerance	King Zhou
	2015/04/09	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
☐ : ☒ :
CRITICAL MAJOR
 : :
ZERO DEFECT S.P.C

Tolerance
x. ± 0.60
.x ± 0.40
.xx ± 0.25

NAME:	SCSI(HPCN) female right angle SMT type			PART NO.	B03-0XX011EB-01		
REV:	E	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2015/04/09	Huangmei	Jack Chen		B03-009
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL: 0769-85181660 85181770			