

8

7

6

5


4

3

2

1

No.of Contact	A	B	C	D
09	16.9	25.0	30.8	19.0
15	25.3	33.3	39.2	27.7
25	39.0	47.0	53.0	41.0
37	55.4	63.5	69.4	57.3

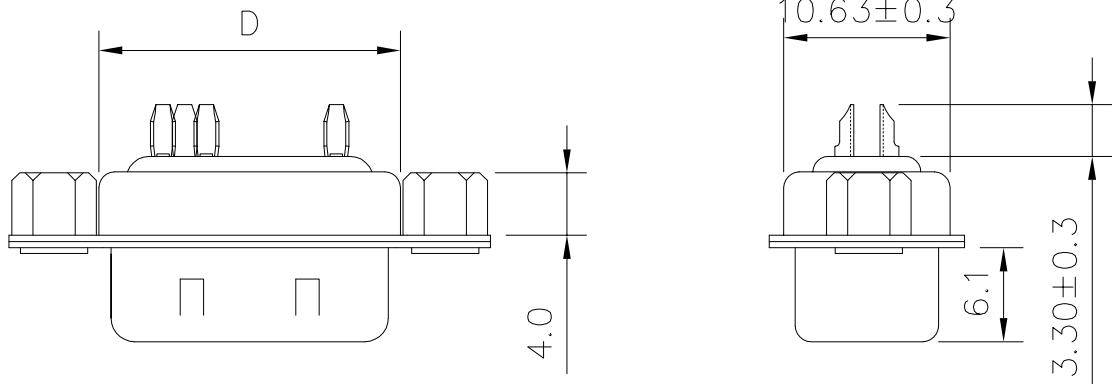

Current rating: 3A  
 Withstanding voltage: 1000V AC  
 Insulation resistance: 1000MΩ Min.  
 Temperature range: -55 °C to +125 °C  
 ROHS compliant  
 Part No.:

B05-0XX3X1XN-S4

No.of contact:  
 09: 9pos  
 15: 15pos  
 25: 25pos  
 37: 37pos  
 Housing color:  
 1: Black  
 5: White  
 6: Blue  
 Contact area:  
 A: G/F  
 C: Au 3u"  
 k: Au 30u"

5	Nut	Steel	Plating:Ni
4	Rear shell	SPCC	Plating:Sn
3	Front shell	SPCC	Plating:Ni
2	Housing	PBT+30%GF	Color:see part no.
1	Terminal	Copper alloy	Contact area:see part no. Solder area:Sn
Item	Desc.	Material	Remarks

▲	2020/10/07	Change remark	Jack Chen	QUALITY SYMBOLS □: CRITICAL ▣: MAJOR ▽: ZERO DEFECT ▽: S.P.C	Tolerance	NAME: D-SUB male solder,one-piece housing,rivet 4.0 through hole nuts at the rear	PART NO.	B05-0XX3X1XN-S4
△	2012/07/17	Modified electrical parameters	Jack Chen		.x. ±0.60	REV: D	UNIT: mm	DRW BY
△	2009/05/26	First edition release	Jing Li		.x ±0.40	SCALE: N:1	DATE: 2009/05/26	CHK BY
△					.xx ±0.25			APP BY
SIDE	DATE	DESCRIPTION	APPROVER					DRAWING NO. B05-070
8	7	6	5		4			
lineconn	东莞市林诚塑胶电子有限公司	http://www.lineconn.com	TEL:0769-85181660	85181770				