


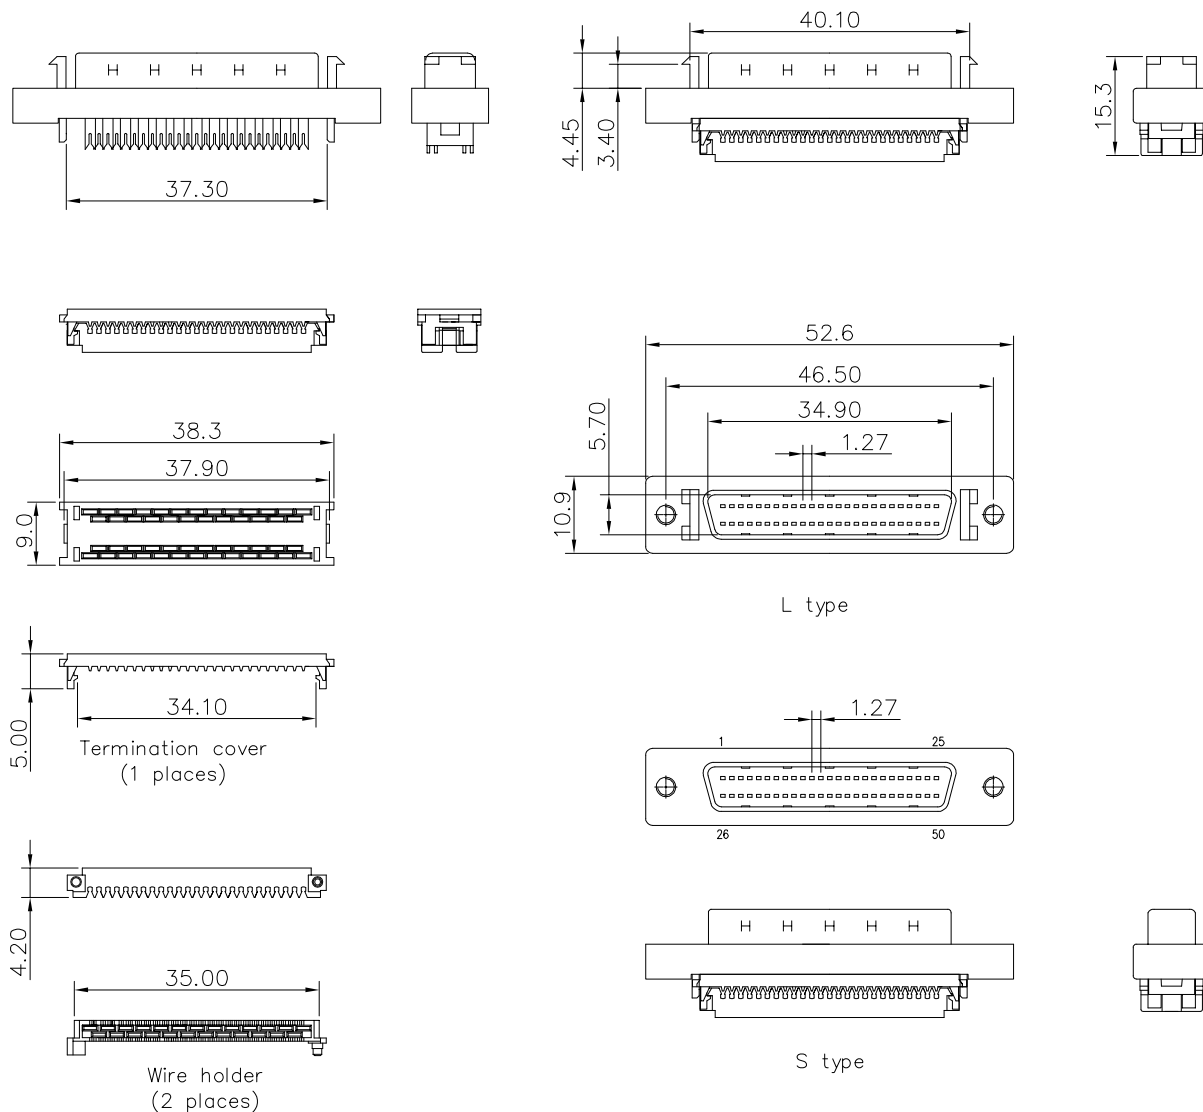

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:

B02-050111EC-X X

Wire holder:
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

Bracket finishes:
L: latch bracket
S: screw bracket

5	Bracket	Zinc alloy	Plating: Ni
4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2021/06/24	Change part number	Carl Hu
△	2013/04/27	Add 0.9mm wire holder	King Zhou
△	2010/01/09	First edition release	King Zhou

QUALITY SYMBOLS
□: ☒: CRITICAL MAJOR
ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	SCSI II(HPDB) 50pin male IDC connector,with bracket			PART NO.	B02-050111EC-X X		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2010/01/09	Huangmei	Carl Hu		B02-044

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------