

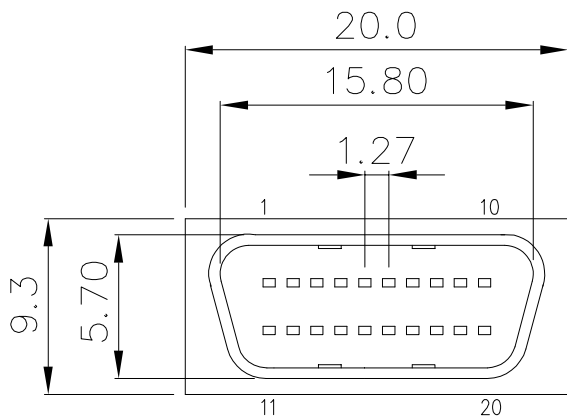




Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

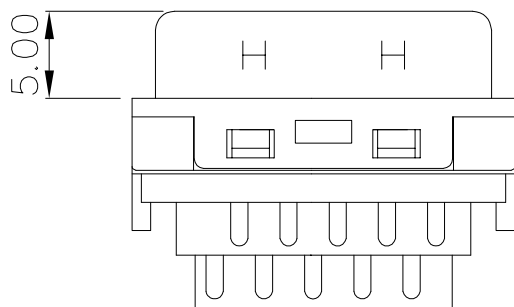

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/14	Change part number	Carl Hu
	2011/07/26	Changed the size	King Zhou
	2011/03/09	First edition release	King Zhou

QUALITY SYMBOLS		Tolerance	
		x.	± 0.60
		.x	± 0.40
		.xx	± 0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI II(HPDB) 20pin male solder connector assembly type				PART NO.	B02-020311E0-01		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/03/09	Huangmei	Carl Hu		B02-024	

SIDE	DATE	DESCRIPTION	APPROVER	东莞市林诚塑胶电子有限公司		http://www.lineconn.com TEL:0769-85181660 85181770	
------	------	-------------	----------	---------------	--	---	--