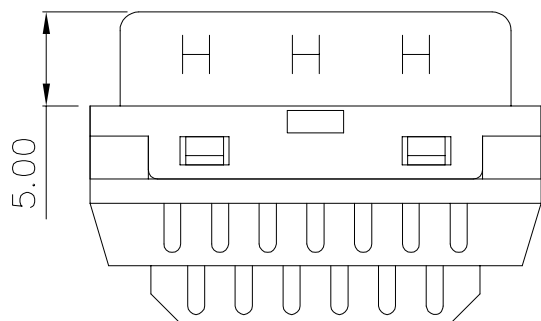
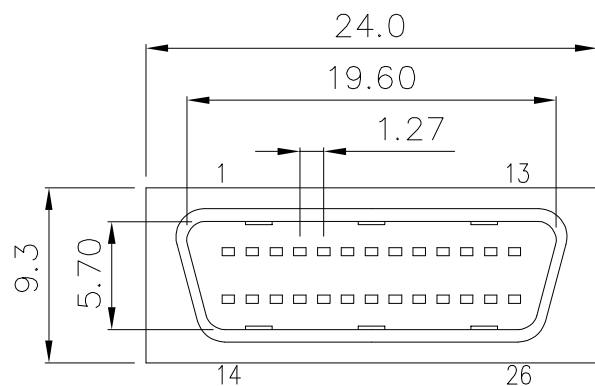


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω max.
Temperature range: -45 $^{\circ}$ C to +125 $^{\circ}$ C
ROHS compliant

4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

	2021/06/29	Change part number	Carl Hu
	2013/09/26	Changed the size	King Zhou
	2011/03/09	First edition release	King Zhou

QUALITY SYMBOLS	
CRITICAL	MAJOR
ZERO DEFECT	S.P.C

Tolerance	
x.	± 0.60
.x	± 0.40
.xx	± 0.25

NAME:		SCSI II(HPDB) 26pin male solder connector assembly type			PART NO.	B02-026311E0-01	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2011/03/09	Huangmei	Carl Hu		B02-027
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com		
					TEL:0769-85181660 85181770		

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------