

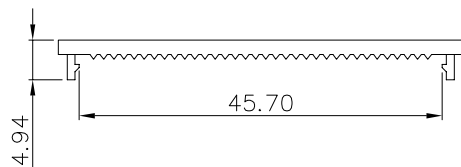
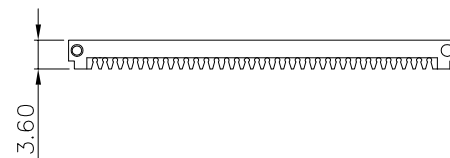


Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:

B02-068111E0-X0

Wire holder: _____
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

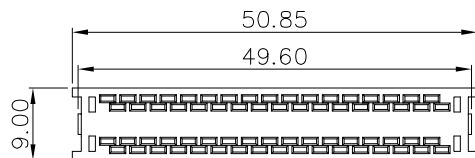

Termination cover
(1 places)

Wire holder
(2 places)

4	Cover	PBT+G.F.30% (UL 94V-0)	Color:black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color:black
2	Shell	SPCC	Plating:Ni
1	Terminal	Phosphor bronze	Contact area:Au 5u" Solder area:Ni Under-plating:Ni
Item	Desc.	Material	Remark

△	2021/06/24	Change part number	Carl Hu
△	2017/09/03	Add 0.9mm wire holder	King Zhou
△	2011/03/12	First edition release	King Zhou

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI II(HPDB) 68pin male IDC connector assembly type				PART NO.	B02-068111E0-X0		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2011/03/12	Huangmei	Carl Hu		B02-047	

SIDE	DATE	DESCRIPTION	APPROVER			东莞市林诚塑胶电子有限公司		http://www.lineconn.com	
8	7	6	5	4	3	2	1	TEL:0769-85181660 85181770	