
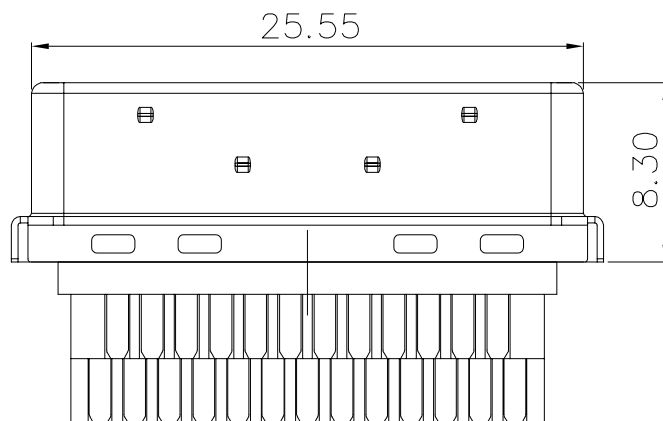
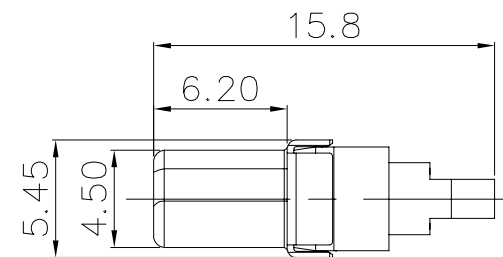


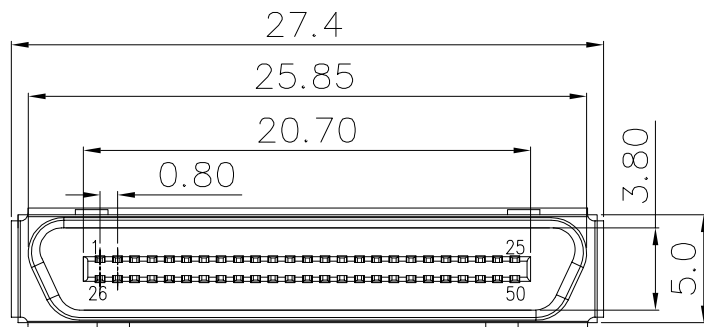

Current rating: 1A
 Voltage rating: 30V AC(rms)
 Withstanding voltage: 250V AC
 Contact resistance : 50mΩ max.
 Insulation resistance: 500MΩ Min.
 Temperature range: -45℃ to +105℃
 ROHS compliant

4	Cover	LCP+G.F.30%	Color: black
3	Housing	LCP+G.F.30%	Color: black
2	Sheel	Spcc	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance		NAME: VHDCI(pitch 0.8mm) 50pin male solder connector		PART NO.		B06-050311C0-01		
				□: ☒:	x. ±0.80	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
				CRITICAL MAJOR	.x ±0.50	SCALE:	N:1	DATE:	2020/09/26	Huangmei	Jack Chen		B06-024
	2020/09/26	First edition release	Jack Chen	▽: ▽:	.xx ±0.25			lineconn 东莞市林诚塑胶电子有限公司		http://www.lineconn.com			
SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C					TEL: 0769-85181660 85181770				