

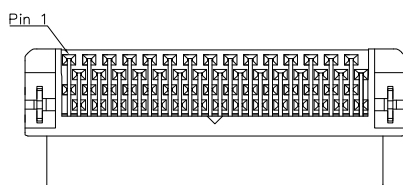
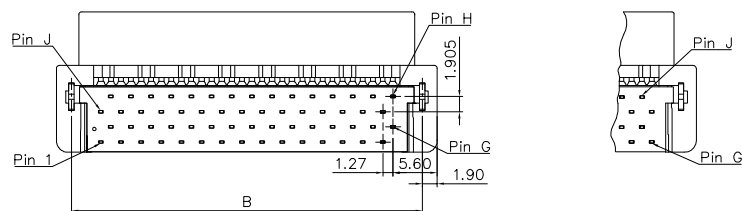



120	80.47	82.33	86.13	74.93	60	120	61
100	66.77	69.63	73.43	62.23	50	100	51
80	55.07	56.93	60.73	49.53	40	80	41
68	47.45	49.31	53.11	41.91	34	68	35
60	42.37	44.23	48.03	36.83	30	60	31
50	36.02	37.88	41.68	30.48	25	50	26
40	26.67	31.53	35.33	24.13	20	40	21
30	23.32	25.18	28.98	17.78	15	30	16
20	16.97	18.83	22.63	11.43	10	20	11
POS	A	B	C	D	G	J	H

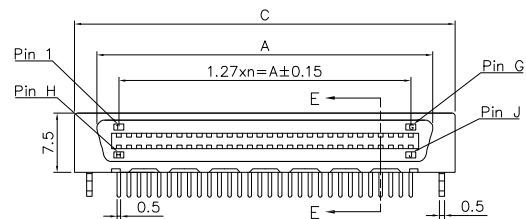



20,40,60,68,80,100,120pin




30,50pin



Section E-E
Scale 2:1

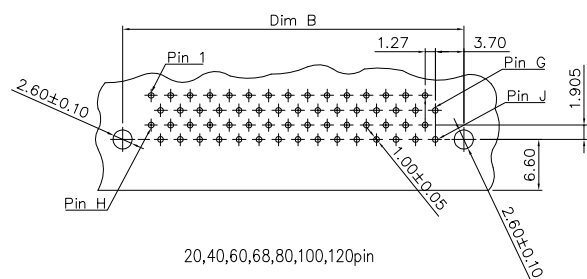

20,40,60,68,80,100,120pin



30,50pin

PCB layout

Current rating: 1A
Insulation resistance: 500MΩ/Min
Withstanding voltage: 500V AC/Min
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +125℃
ROHS compliant
Part number:

B03-XXX61NCN-A2

No.of contact: _____
20: 20pos
?
120: 120POS

3	Board lock	Copper alloy	Plating: Sn
2	Housing	PBT+30%GF	Color: black
1	Terminal	Phosphor bronze	Contact area: Au 3u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

Δ	2019/07/24	Change temperature range	Carl Hu
Δ	2019/07/16	Change tolerance	Carl Hu
Δ	2018/11/22	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:	SCSI female right angle all-plastic			PART NO.	B03-XXX61NCN-A2		
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/11/22	Huangmei	Carl Hu		B03-090
lineconn 东莞市林诚塑胶电子有限公司				http://www.lineconn.com TEL:0769-85181660 85181770			