


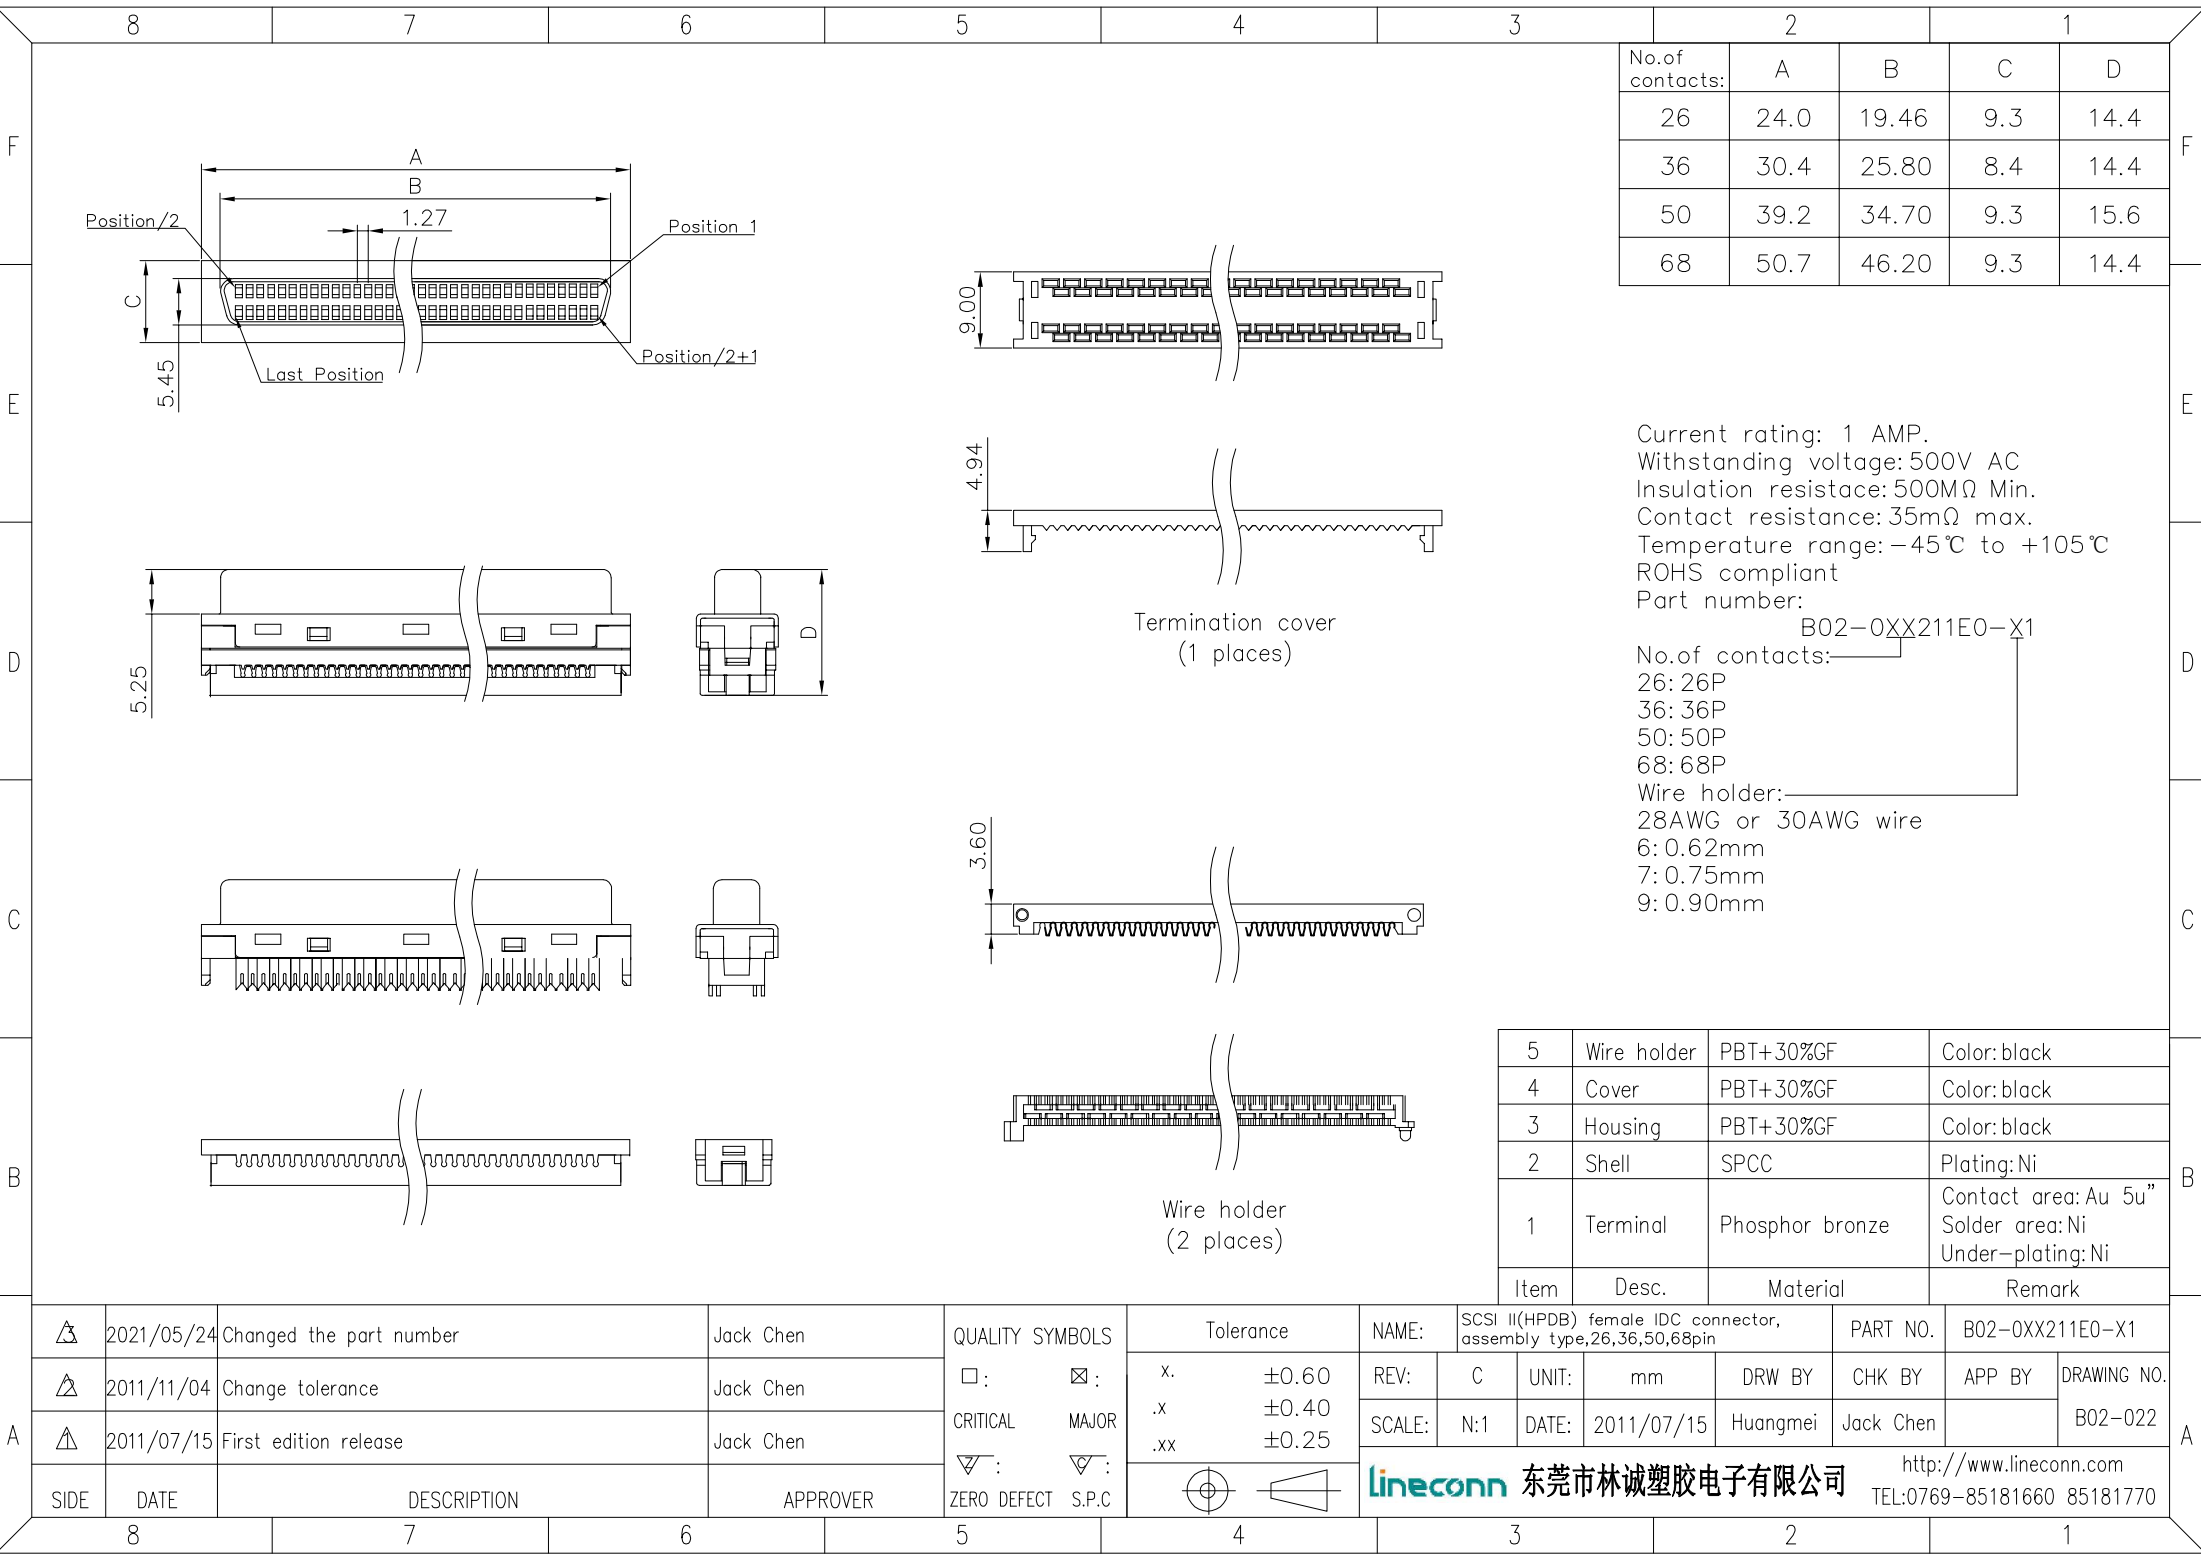

No.of contacts:	A	B	C	D
26	24.0	19.46	9.3	14.4
36	30.4	25.80	8.4	14.4
50	39.2	34.70	9.3	15.6
68	50.7	46.20	9.3	14.4

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B02-0XX211E0-X1
No.of contacts: _____
26: 26P
36: 36P
50: 50P
68: 68P
Wire holder: _____
28AWG or 30AWG wire
6: 0.62mm
7: 0.75mm
9: 0.90mm

5	Wire holder	PBT+30%GF	Color: black
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Ni Under-plating: Ni
Item	Desc.	Material	Remark

A	△	2021/05/24	Changed the part number		Jack Chen	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME: SCSI II(HPDB) female IDC connector, assembly type,26,36,50,68pin		PART NO.		B02-0XX211E0-X1		A		
	△	2011/11/04	Change tolerance		Jack Chen		x.	±0.60	REV:	C	UNIT:	mm	DRW BY	CHK BY		APP BY	DRAWING NO. B02-022
	△	2011/07/15	First edition release		Jack Chen		.x	±0.40	SCALE:	N:1	DATE:	2011/07/15	Huangmei	Jack Chen			
							.xx	±0.25	lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770								
	SIDE	DATE	DESCRIPTION				APPROVER										
8		7		6		5		4		3		2		1			