






Termination cover
(1 Places)

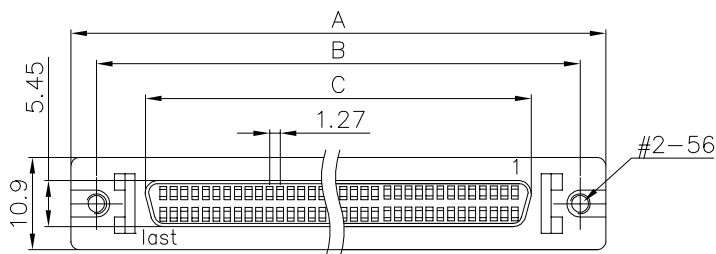

Wire Holder
(2 Places)

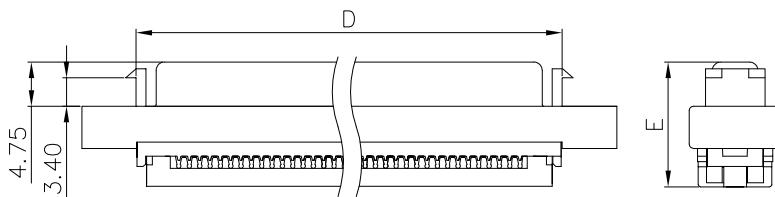

L Type

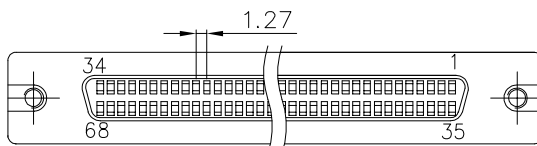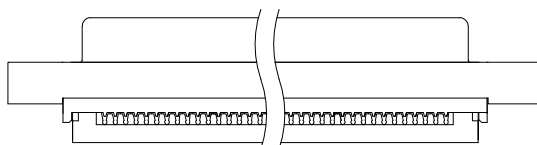

S Type

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -25℃ to +85℃
ROHS compliant
Part number:

B02-0XX218EC-XX

No.of contacts:

26: 26P

36: 36P

50: 50P

68: 68P

Wire holder:

28AWG or 30AWG wire

6: 0.62mm

7: 0.75mm

9: 0.90mm

Bracket finishes:

L: latch bracket

S: screw bracket

Dimensions:

No.of contacts:	A	B	C	D	E
26	37.2	31.26	19.45	24.70	14.4
36	43.5	37.60	25.80	31.00	14.4
50	52.6	46.50	34.70	40.10	15.3
68	64.0	57.95	46.20	50.90	14.6

4	Cover	PBT+30%GF	Color:black
3	Housing	PBT+30%GF	Color:black
2	Shell	Zinc alloy	Plating:Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Description	Material	Remark

Δ	2021/08/01	Change part number	Shuo Cao
Δ	2020/11/24	Change tolerance	Shuo Cao
Δ	2011/06/09	First edition release	Jing Li

QUALITY SYMBOLS
□: □: MAJOR
CRITICAL MAJOR
▽: ▽: S.P.C
ZERO DEFECT S.P.C

Tolerance
x. ±0.60
.x ±0.40
.xx ±0.25

NAME:	SCSI II(HPDB) female IDC type, with bracket, 26, 36, 50, 68pin	PART NO.	B02-0XX218EC-XX
REV:	D	UNIT:	mm
SCALE:	N:1	DATE:	2011/06/09
DRW BY	Qiang Liao	CHK BY	Shuo Cao
APP BY		DRAWING NO.	B02-019