

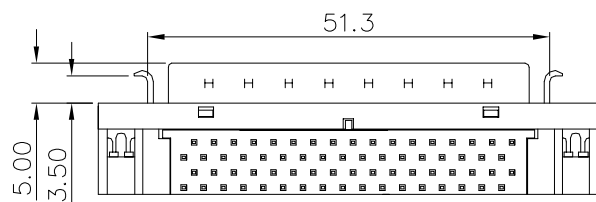
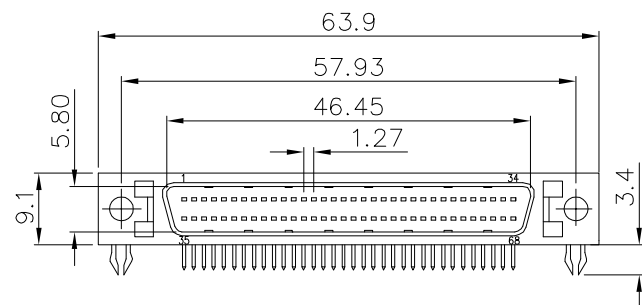





8 7 6 5 4 3 2 1

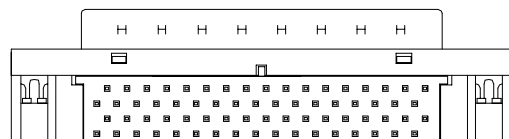

L type

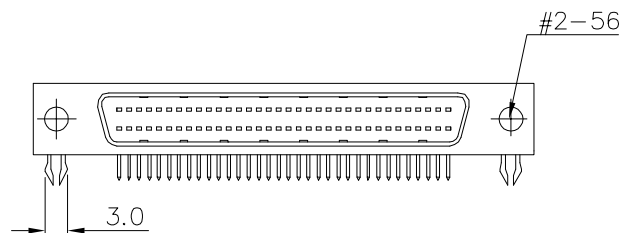

S type

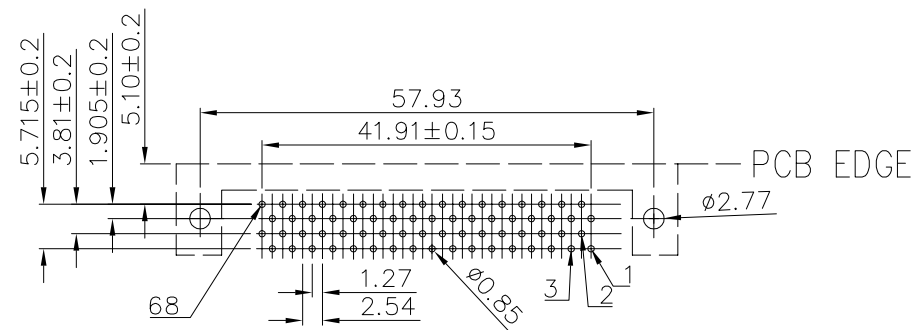

PCB layout

Current rating: 1 AMP.
Withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ max.
Temperature range: -45℃ to +105℃
ROHS compliant
Part number:

B02-068511EC-1X

Bracket finishes:
L: latch bracket
S: screw bracket

6	Board lock	Copper alloy	Plating: Tin
5	Bracket	SPCC	Plating: Ni
4	Cover	L.C.P UL94V-0	Color: black
3	Housing	L.C.P UL94V-0	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor bronze	Contact area: Au 5u" Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2017/11/04	Change tolerance	Jack Chen
△	2017/10/26	Add pin bit annotation	Jack Chen
△	2015/06/13	First edition release	Jack Chen

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:		SCSI II(HPDB)68pin male right angle,1pin in first row			PART NO.	B02-068511EC-1X	
REV:	C	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2015/06/13	Huangmei	Jack Chen		B02-081
 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		

8 7 6 5 4 3 2 1