
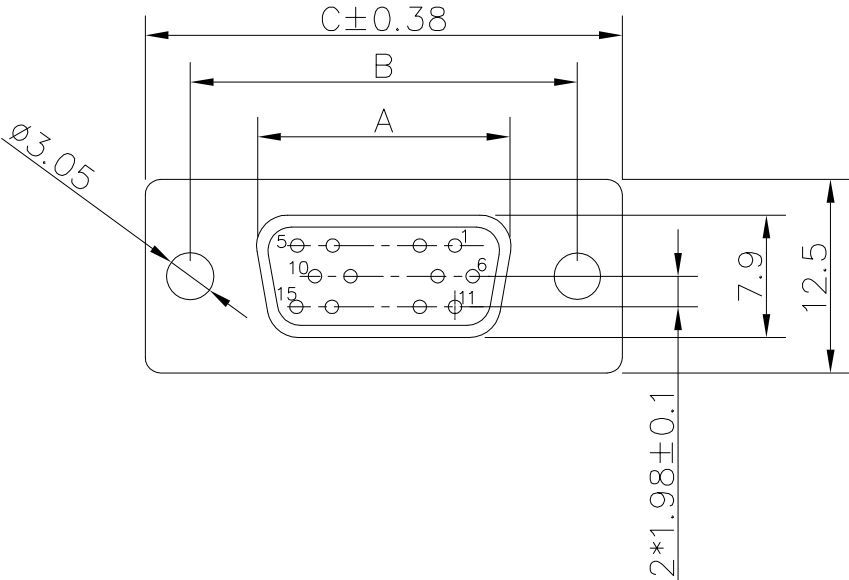
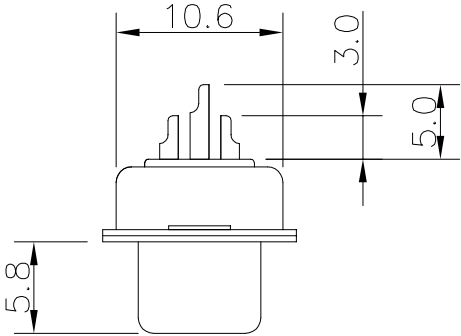


Pin no.	A	B	C	D
15	16.3	25.0	30.8	19.3
26	24.6	33.3	39.1	27.5
44	36.3	47.0	53.0	41.3
62	54.8	63.5	69.3	57.7

Voltage current rating:5 AMP.
Dielectric withstanding voltage:1000V AC
Insulation resistance:1000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant

Part number:
B04−0XX4X1XN−02
No.of contact:
15: 15pos
26: 26pos
44: 44pos
62: 62pos
Housing color:
1: Black
5: White
6: Blue
Terminal plating:
3: full Au 3u”
4: full Au 2u”
5: full Au 1u”

4	Rear shell	SPCC	Plating:Sn
3	Front shell	SPCC	Plating:Ni
2	Housing	PBT+30%GF	Color:see part no.
1	Terminal	Copper alloy	Plating:see part no.
Item	Desc.	Material	Remark

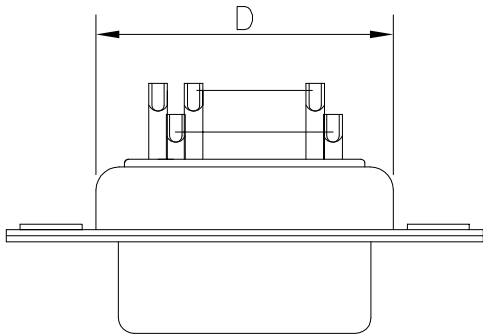

△	2024/08/15	Add Terminal plating type	Jack Chen
△	2023/10/22	Add ROHS comment	Jack Chen
△	2009/04/14	First edition release	Jing Li
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		HD.D-SUB female solder,machined pin				PART NO.		B04-0XX4X1XN-02		
REV:		E	UNIT:		mm	DRW BY		CHK BY	APP BY	DRAWING NO. B04-004
SCALE:		N:1	DATE:		2009/04/14	Huangmei		Jack Chen		
lineconn 东莞市林诚塑胶电子有限公司 http://www.lineconn.com TEL:0769-85181660 85181770										