
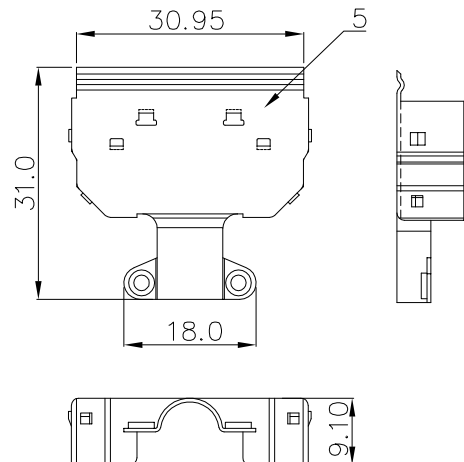




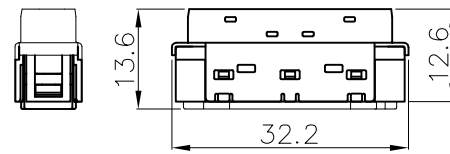
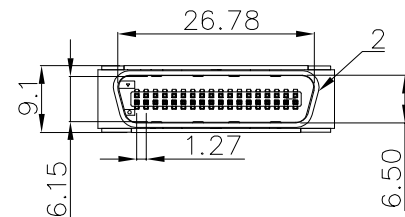
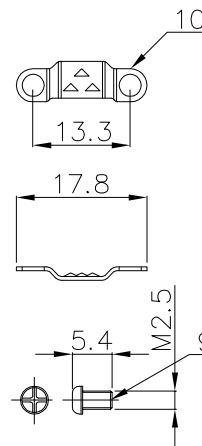
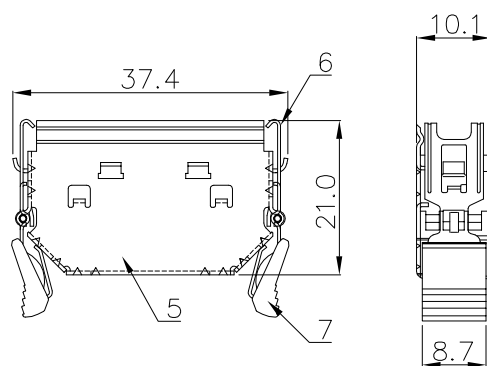


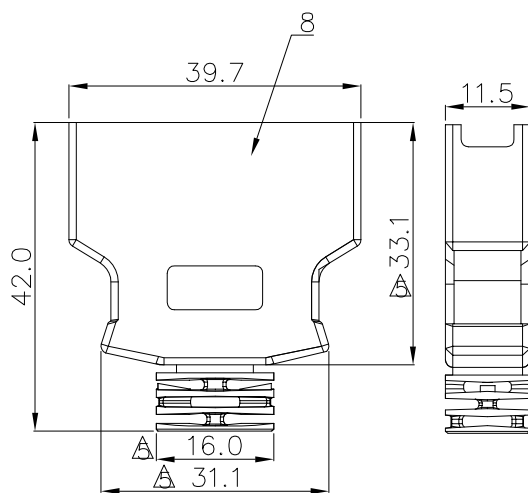

Contact rating:1 AMP.
Contact resistance:35 mΩ/max.
Withstanding voltage:500V AC
Insulation resistance:500MΩ/Min.
Temperature range:-45℃ to +125℃
ROHS compliant
Part number:
B03-0361X1X2-8A
Hood Color:
1:black
C.beige
Contact area plating:
A:G/F
E:Au 5u"
H:Au 15u"

10	Cable clip	Steel	Plating: Ni
9	Screw	Steel	Plating: Ni
8	Plastic hood	ABS+G.F.30%(UL 94V-0)	Color: see part No.
7	Latch cover	ABS+G.F.30%(UL 94V-0)	Color: see part No.
6	Latch	SUS304	
5	Tinplate	SPCC	Plating: Ni
4	Cover	PBT+G.F.30% (UL 94V-0)	Color: black
3	Housing	PBT+G.F.30% (UL 94V-0)	Color: black
2	Sheel	SPCC (t=0.50mm)	Plating: Ni
1	Terminal	Copper alloy (t=0.25mm)	Contact area: see part No. Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2026/01/10	Change size	Carl Hu
△	2025/12/09	Add dimension annotations	Carl Hu
△	2018/10/22	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SCSI 36pin male IDC assembly plastic hood(3M substitute)			PART NO.	B03-0361X1X2-8A	
REV:	F	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2018/10/22	Huang mei	Carl Hu		B03-095
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770		