
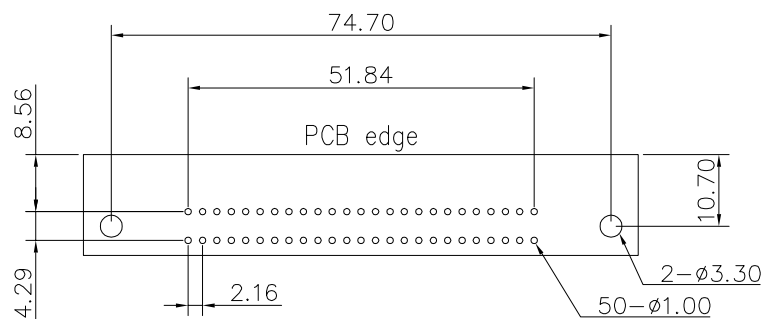
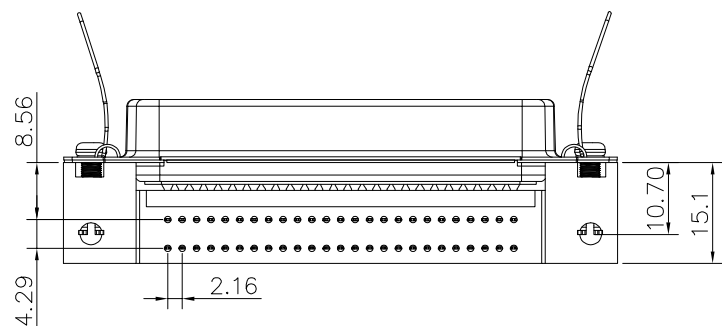
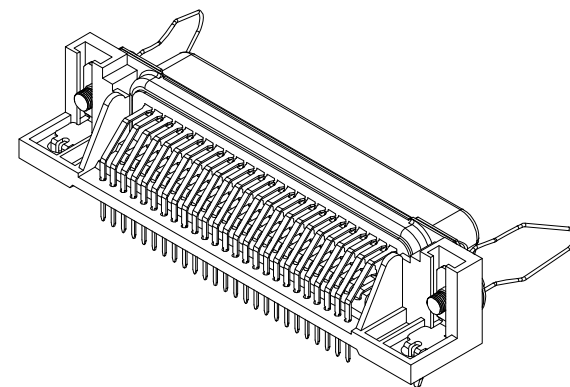



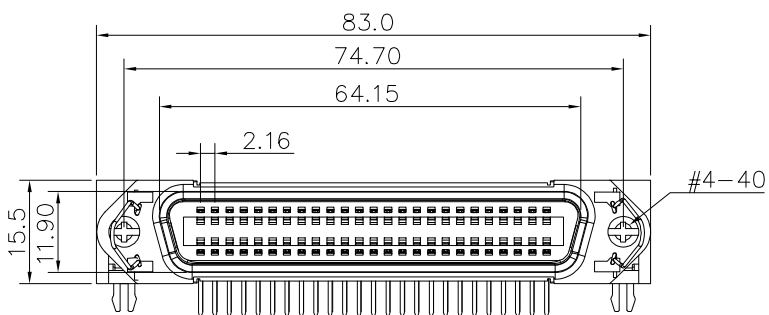

PCB layout

Current rating: 1A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55°C to +105°C
ROHS compliant
Part number:

B17-0506X1A0-02


Housing color: _____
1: Black
6: Blue

6	Spring loaded buckle	Steel	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Board lock	SPCC	Plating: Sn
3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

△	2025/09/24	Modify incorrect size	Carl Hu
△	2021/10/13	First edition release	Carl Hu
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS
□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25



NAME:	Centronics(57) 50pin female right angle for PCB				PART NO.	B17-0506X1A0-02		
REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2021/10/13	Huangmei	Carl Hu		B17-031	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770			