
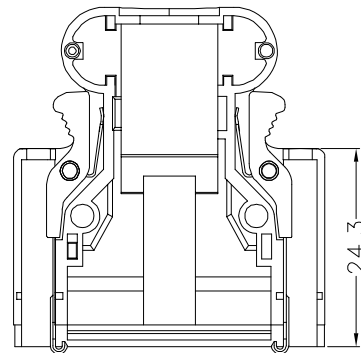
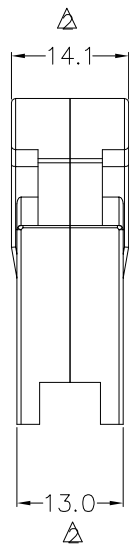
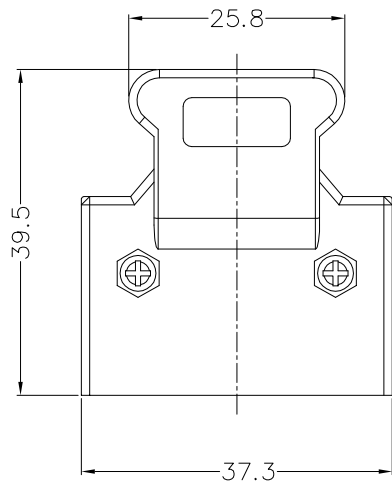








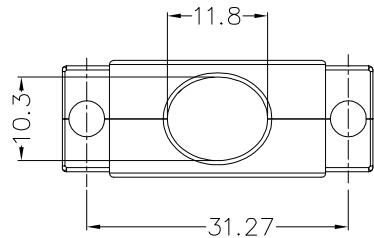

Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500M Ω Min.
Contact resistance: 35m Ω Max
Temperature range: -45 $^{\circ}$ C to +105 $^{\circ}$ C
ROHS compliant
Part No.:

Solder area: B01-026311X2-01
3: G/F
C: Sn

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	PBT+30%GF	Color: black
6	Latch	ABS, SUS 304	Color: black
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2026/01/26	Correct the incorrect pin position markings	Shuo Cao
△	2017/10/12	Changing the dimensioning	Huaping
△	2009/06/14	First edition release	King Zhou

SIDE	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

QUALITY SYMBOLS
□: □: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance	x. ±0.60
.x ±0.40	.xx ±0.25
⊕	⊖

NAME:	SM(SCSI) 26pin male solder assembly plastic hood with latch	PART NO.	B01-026311X2-01
REV:	C	UNIT:	mm
SCALE:	N:1	DATE:	2009/06/14
DRW BY	CHK BY	APP BY	DRAWING NO.
Huangmei	Shuo Cao		B01-015
lineconn 东莞市林诚塑胶电子有限公司			
http://www.lineconn.com			
TEL:0769-85181660 85181770			