
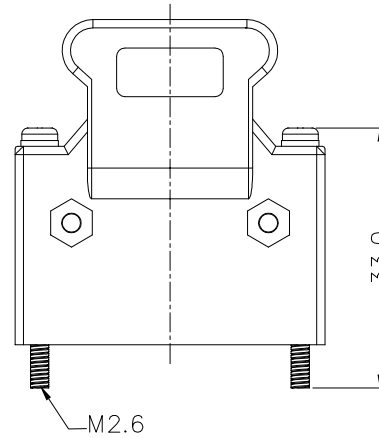
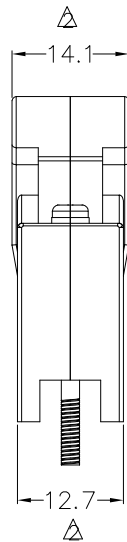


Contact current rating: 1 Amp
Dielectric withstanding voltage: 500V AC
Insulation resistance: 500MΩ Min.
Contact resistance: 35mΩ Max
Temperature range: -45℃ to +105℃
ROHS compliant
Part No.:

B01-026311X4-01

Solder area:
3: G/F
C: Sn

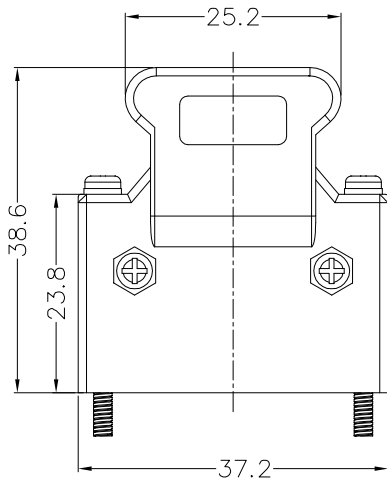

10	Screw	Steel	Plating: Ni, M2.0
9	Screw	Steel	Plating: Ni
8	Nut	Steel	Plating: Ni
7	Hood	ABS+PC	Color: black
6	Screw	Steel	Plating: Ni, L=33.0mm
5	Clamp	Steel	Plating: Ni
4	Cover	PBT+30%GF	Color: black
3	Housing	PBT+30%GF	Color: black
2	Shell	SPCC	Plating: Ni
1	Terminal	Copper alloy	Contact area: Au 3u" Solder area: see part no. Under-plating: Ni
Item	Desc.	Material	Remarks

△	2026/01/26	Correct the incorrect pin position markings	Shuo Cao
△	2021/09/02	New mold development, adjustment dimension	Shuo Cao
△	2009/06/11	First edition release	King Zhou
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS		Tolerance	
□:	☒:	x.	±0.60
CRITICAL	MAJOR	.x	±0.40
▽:	▽:	.xx	±0.25
ZERO DEFECT	S.P.C		

NAME:		SM(SCSI) 26pin male solder assembly plastic hood with screw 33.0mm				PART NO.		B01-026311X4-01	
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B01-013		
SCALE:	N:1	DATE:	2009/06/11	Huangmei	Shuo Cao				
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com TEL:0769-85181660 85181770				