

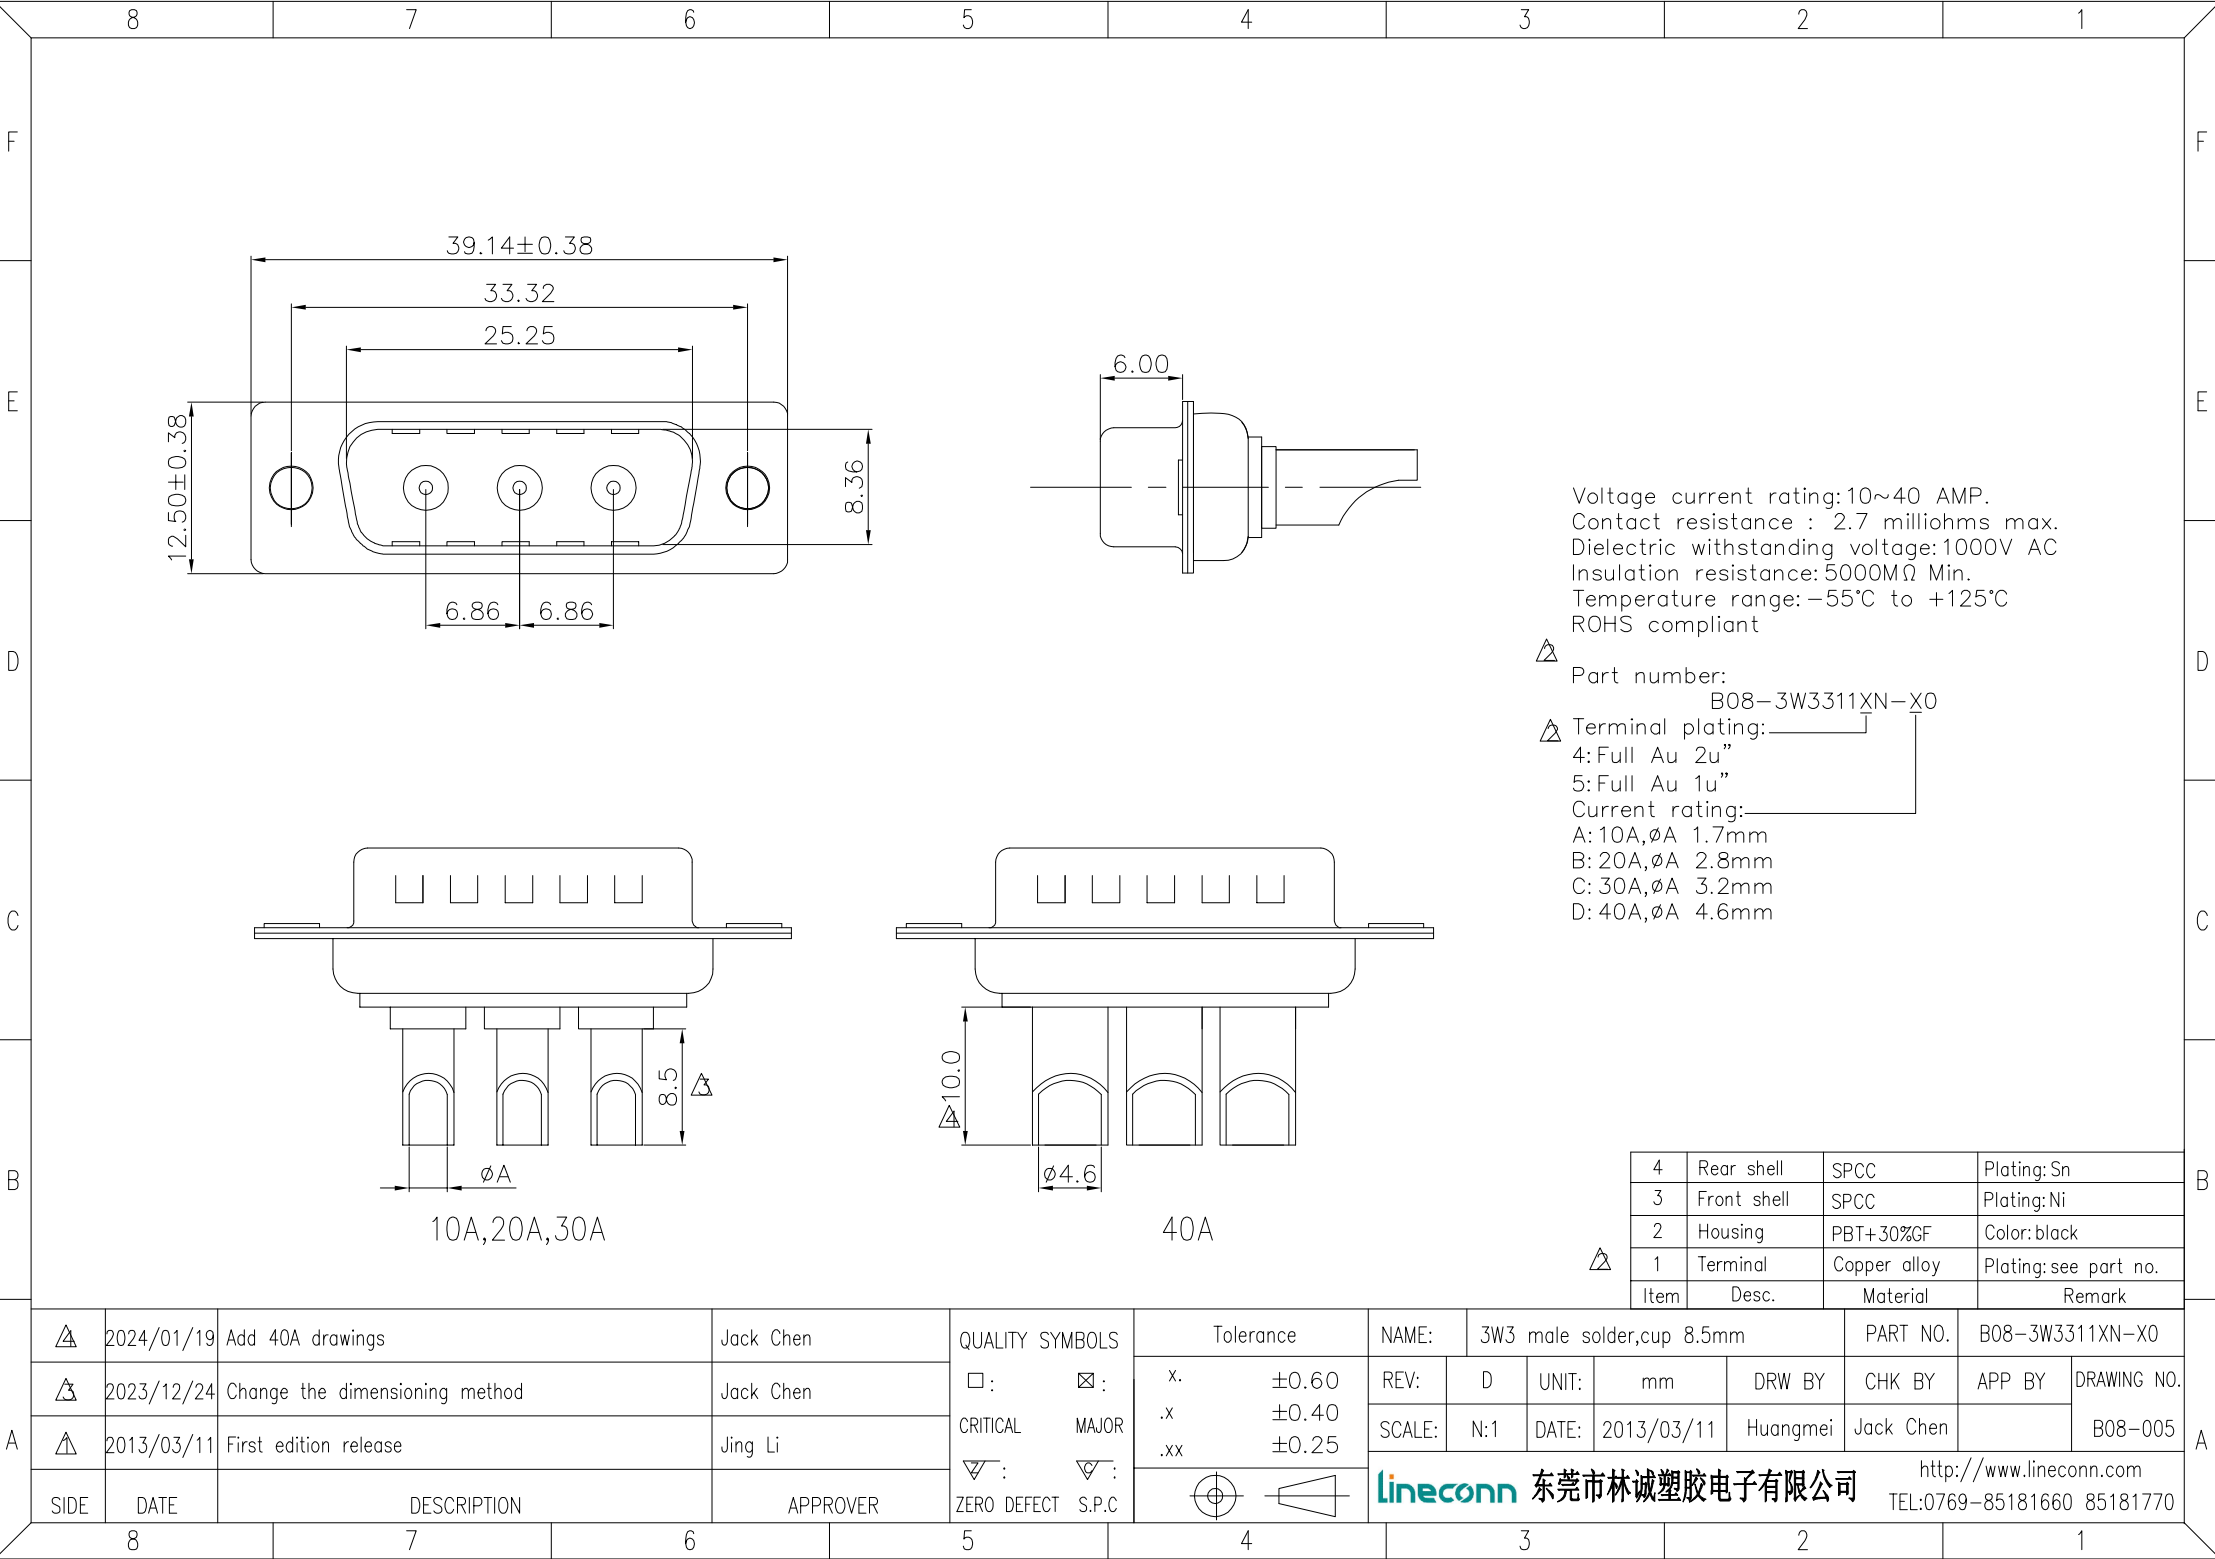
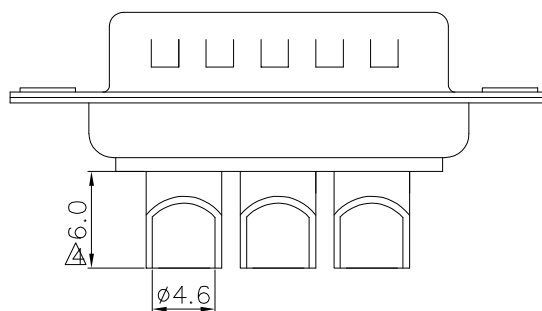
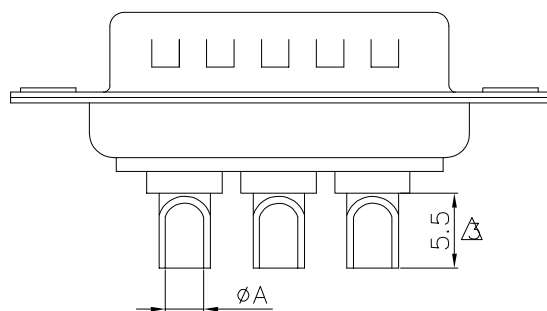


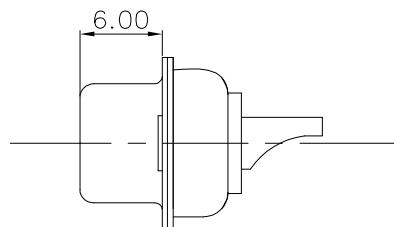

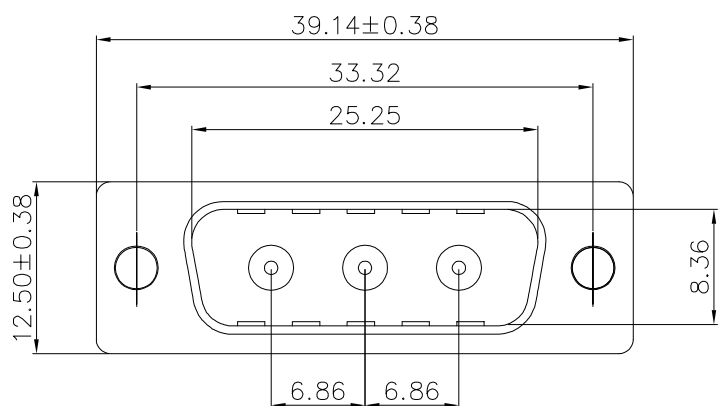

10A,20A,30A

40A

Voltage current rating:10~40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:-55°C to +125°C
ROHS compliant

Part number: B08-3W3311XN-X2

Δ Terminal plating: _____
 4: Full Au 2u"
 5: Full Au 1u"
 Current rating: _____
 A: 10A, ØA 1.7mm
 B: 20A, ØA 2.8mm
 C: 30A, ØA 3.2mm
 D: 40A, ØA 4.6mm

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Plating: see part no.
Item	Desc.	Material	Remark

△	2024/01/19	Add 40A drawings	Jack Chen	QUALITY SYMBOLS □ : ☒ : CRITICAL MAJOR ▽ : ▽ : ZERO DEFECT S.P.C	Tolerance		NAME:		3W3 male solder,cup 5.5mm				PART NO.		B08-3W3311XN-X2	
△	2023/12/24	Change the dimensioning method	Jack Chen		x. ±0.60 .x ±0.40 .xx ±0.25	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
△	2023/08/30	First edition release	Jing Li		SCALE:	N:1	DATE:	2023/08/30	Huangmei	Jack Chen						
SIDE	DATE	DESCRIPTION	APPROVER		 	 东莞市林诚塑胶电子有限公司								http://www.lineconn.com TEL:0769-85181660 85181770		

Lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770