
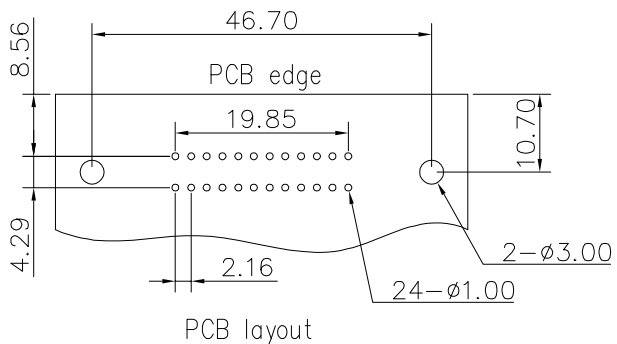
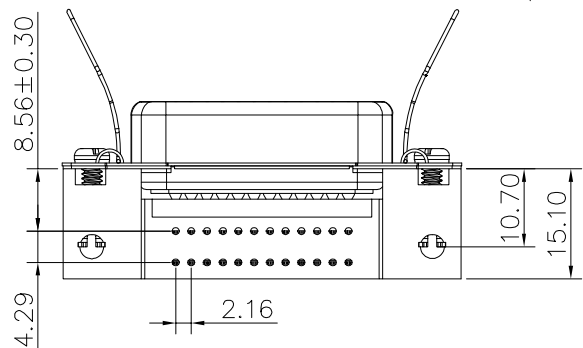
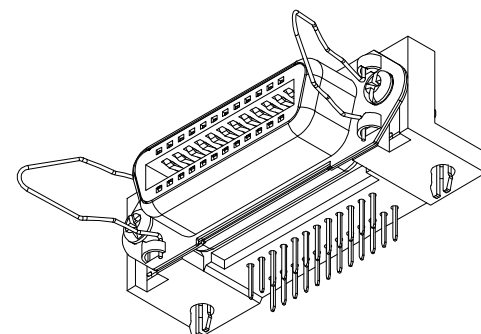
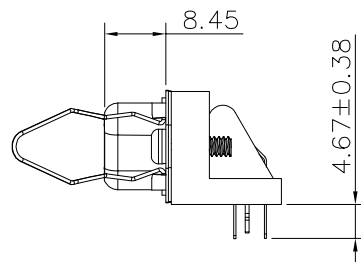


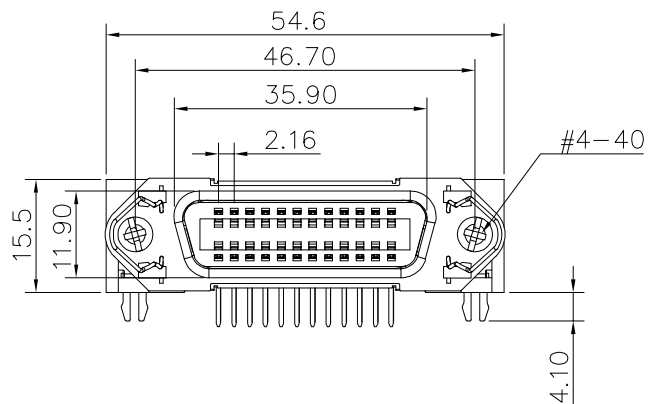

Current rating: 5A
Withstanding voltage: 250V AC
Contact resistance : 30mΩ max.
Insulation resistance: 1000MΩ Min.
Temperature range: -55℃ to +105℃
ROHS compliant
Part number:

B17-0246X1A0-02

Housing color: _____
1: Black
6: Blue


6	Spring loaded buckle	Steel	Plating: Ni
5	Screw	Steel	Plating: Ni
4	Board lock	SPCC	Plating: Sn
3	Housing	PBT+G.F.30%	Color: see part no.
2	Shell	SPCC	Plating: Ni
1	Terminal	Phosphor copper	Contact area: G/F Solder area: Sn Under-plating: Ni
Item	Desc.	Material	Remark

QUALITY SYMBOLS

□: ☒: CRITICAL MAJOR
▽: ▽: ZERO DEFECT S.P.C

Tolerance

x. ±0.60
.x ±0.40
.xx ±0.25



NAME:

Centronics(57) 24pin female right angle for PCB

REV:

A

UNIT:

mm

DRW BY

CHK BY

APP BY

DRAWING NO.

SCALE:

N:1

DATE:

2021/10/11

Huangmei

Carl Hu

B17-029

Lineconn

东莞市林诚塑胶电子有限公司

http://www.lineconn.com

TEL: 0769-85181660 85181770

A

SIDE

DATE

DESCRIPTION

Carl Hu

APPROVER

8

7

6

5

4

3

2

1