
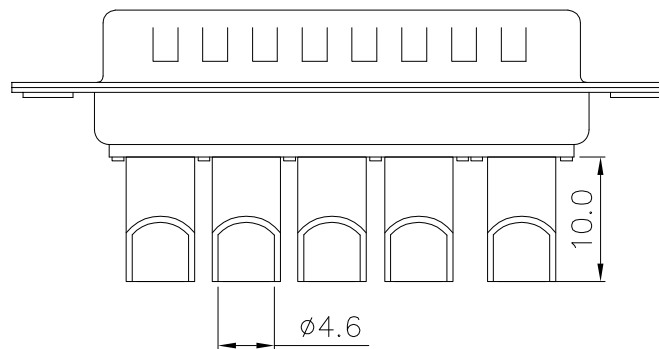







40A


D: 40A, Dim. A $\varnothing 4.60$

male solder,cup 8.5mm			PART NO.	B08-5W5311XN-X0	
UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B08-009
DATE:	2013/03/16	Huangmei	Shuo Cao		

lineconn 东莞市林诚塑胶电子有限公司 <http://www.lineconn.com>
TEL:0769-85181660 85181770

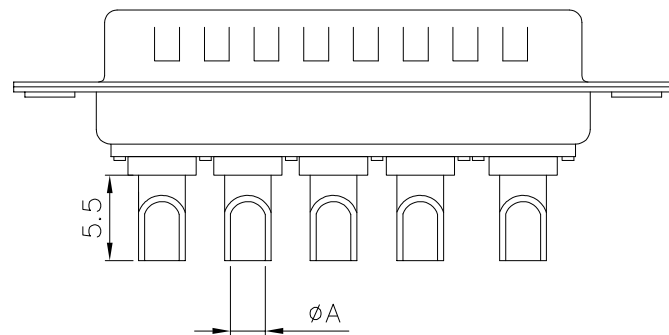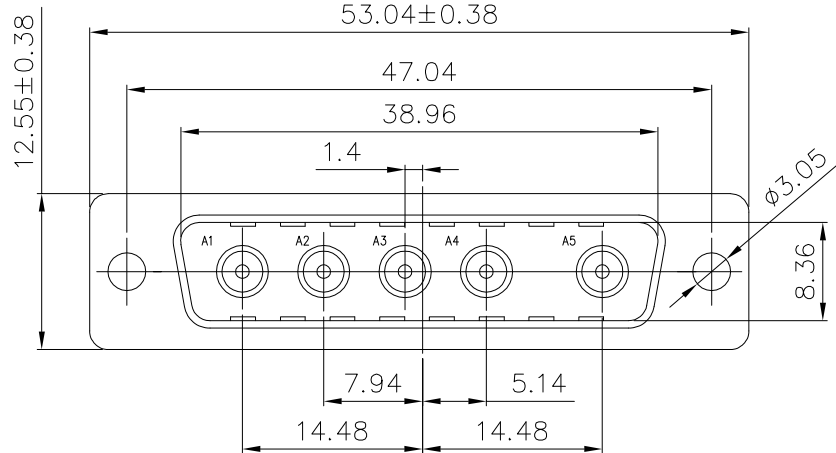

10A,20A,30A

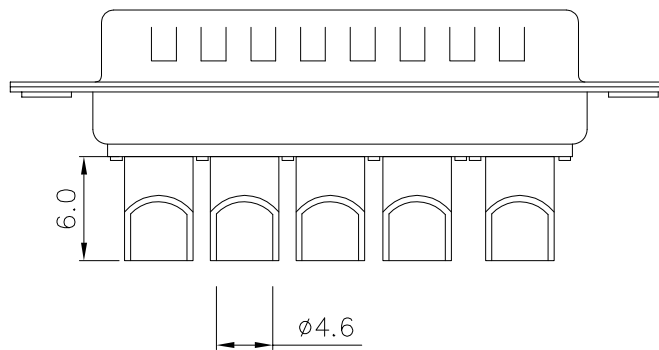

40A

Current rating:10/20/30/40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range: -55℃ to +125℃
ROHS compliant
Part number:

B08-5W5311XN-X2

Terminal plating:

4:Full Au 2u"

5:Full Au 1u"

Current rating:

A:10A,Dim.A ø1.70

B:20A,Dim.A ø2.80

C:30A,Dim.A ø3.30

D:40A,Dim.A ø4.60

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part number
Item	Desc.	Material	Remark

				QUALITY SYMBOLS	Tolerance	NAME:	5W5 male solder,cup 5.5mm			PART NO.	B08-5W5311XN-X2		
A		2023/09/14	Add 40A drawings,Change tolerance	Carl Hu	☐ : ☒ :	REV:	B	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
		2018/10/11	First edition release	Shuo Cao	CRITICAL MAJOR	SCALE:	N:1	DATE:	2018/10/11	Huangmei	Carl Hu		B08-028
					: :								
	SIDE	DATE	DESCRIPTION	APPROVER	ZERO DEFECT S.P.C								
	8	7	6	5	4								1

lineconn 东莞市林诚塑胶电子有限公司

http://www.lineconn.com
TEL:0769-85181660 85181770