
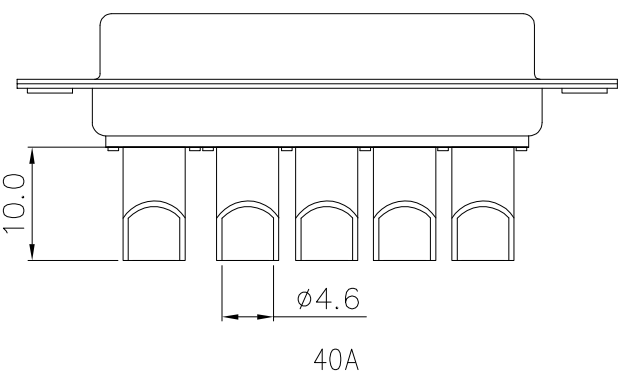
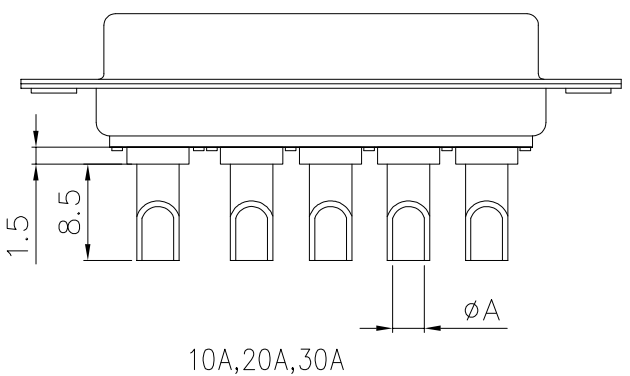




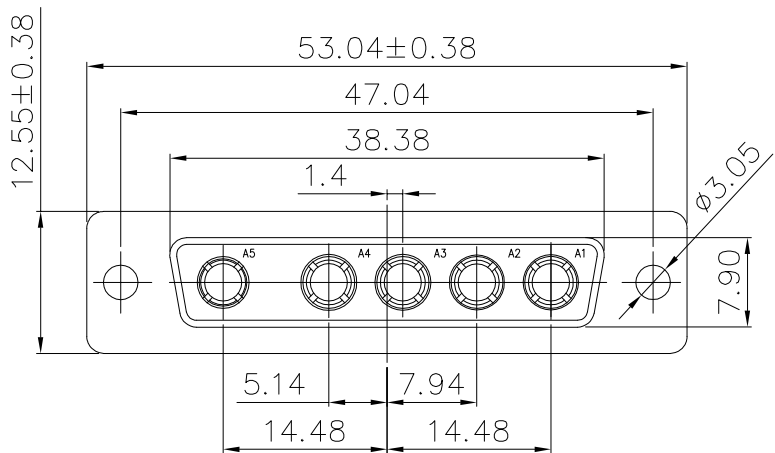


Current rating:10/20/30/40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000MΩ Min.
Temperature range:−55℃ to +125℃
ROHS compliant
Part number:

B08−5W5411XN−X0
Terminal plating:_____
4:Full Au 2u”
5:Full Au 1u”
Current rating:_____
A: 10A,Dim.A Ø1.70
B: 20A,Dim.A Ø2.80
C: 30A,Dim.A Ø3.30
D: 40A,Dim.A Ø4.60

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part number
Item	Desc.	Material	Remark

	2023/09/14	Add 40A drawings,Change tolerance	Shuo Cao	QUALITY SYMBOLS □: ☒: CRITICAL MAJOR ▽: ▽: ZERO DEFECT S.P.C	Tolerance		NAME:		5W5 female solder,cup 8.5mm				PART NO.		B08-5W5411XN-X0	
	2022/09/02	Add Terminal plating type	Shuo Cao		x. ±0.60 .x ±0.40 .xx ±0.25	REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.			
	2013/03/16	First edition release	Jing Li			SCALE:	N:1	DATE:	2013/03/16	Huangmei	Shuo Cao		B08-013			
SIDE	DATE	DESCRIPTION	APPROVER		  lineconn 东莞市林诚塑胶电子有限公司	http://www.lineconn.com TEL:0769-85181660 85181770										

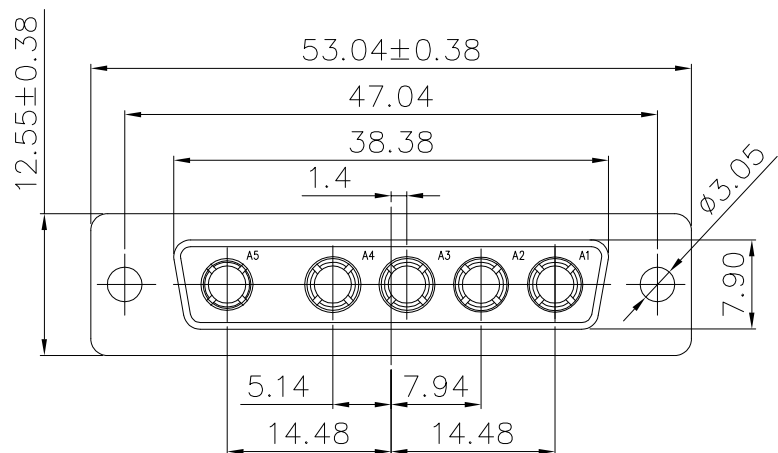

Current rating:10/20/30/40 AMP.
Contact resistance : 2.7 milliohms max.
Dielectric withstanding voltage:1000V AC
Insulation resistance:5000M Ω Min.
Temperature range:-55℃ to +125℃
ROHS compliant
Part number:

B08-5W5411XN-X2

Terminal plating:

4:Full Au 2u"

5:Full Au 1u"


Current rating:

A: 10A,Dim.A ϕ 1.70


B: 20A,Dim.A ϕ 2.80

C: 30A,Dim.A ϕ 3.30

D: 40A,Dim.A ϕ 4.60

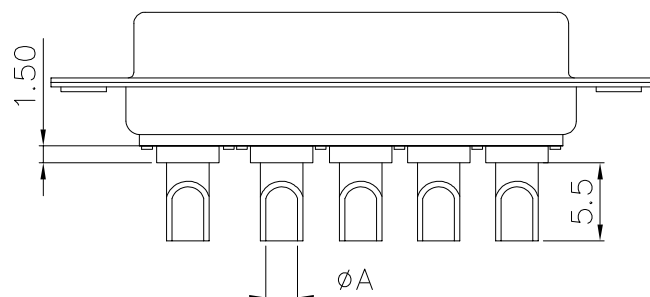

10A,20A,30A

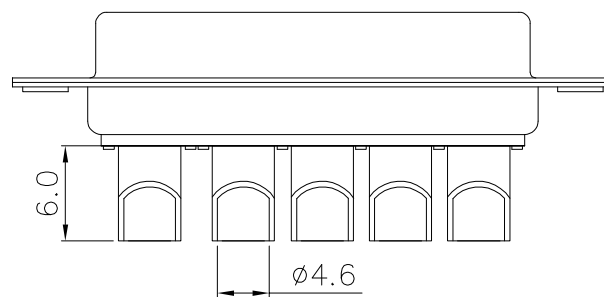

40A

4	Rear shell	SPCC	Plating: Sn
3	Front shell	SPCC	Plating: Ni
2	Housing	PBT+30%GF	Color: black
1	Terminal	Copper alloy	Terminal plated: see part number
Item	Desc.	Material	Remark

△	2023/09/14	Add 40A drawings,Change tolerance	Carl Hu
△	2022/09/02	Add Terminal plating type	Shuo Cao
△	2018/10/11	First edition release	Shuo Cao
SIDE	DATE	DESCRIPTION	APPROVER

QUALITY SYMBOLS	
□:	☒:
CRITICAL	MAJOR
▽:	▽:
ZERO DEFECT	S.P.C

Tolerance	
x.	±0.60
.x	±0.40
.xx	±0.25

NAME:	5W5 female solder,cup 5.5mm				PART NO.	B08-5W5411XN-X2		
REV:	D	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
SCALE:	N:1	DATE:	2018/10/11	Huangmei	Carl Hu		B08-029	
lineconn 东莞市林诚塑胶电子有限公司					http://www.lineconn.com			
					TEL:0769-85181660 85181770			